


MAX Adapter

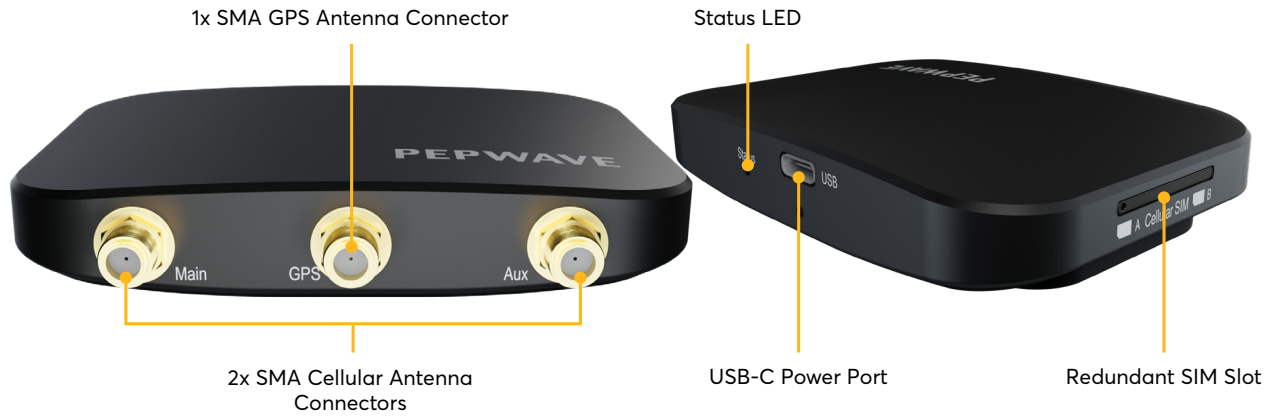

Specifications

Cellular WAN Interfaces	Single LTE Modem	Weight	120g
Redundant SIM Slot	Yes	Operating Temperature	32° – 104°F / 0° – 40°C
Downlink/Uplink Datarate	CAT-12: 600 Mbps/150 Mbps CAT-6: 300Mbps/50Mbps	Humidity	15% – 95% (non-condensing)
Antenna Connectors	2x SMA Cellular, 1x SMA GPS	Warranty	1-Year Limited Warranty
Power Input	5V USB-C	Certifications	FCC, CE, IC
Power Consumption	TBA	Package Content	MAX Adapter, 2x 2dBi 4G LTE Antennas, USB-C power cable
Dimensions	3.9 x 2.8 x 0.6 inches / 100 x 71 x 15 mm		

Ordering information

Product Code	Carrier/Category	4G Bands	3G Bands
MAX-ADP-LTEA-R-T	America CAT-12	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	HSPA+: B1, B2, B4, B5, B6, B8, B9, B19
MAX-ADP-LTEA-W-T	America CAT-6	B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8

Accessories

Product Code	Description
TBD	GPS Antenna