



har-flexicon female connector, horizontal, screwing



General information

Design		female connector	
Type	har-flexicon 3.50/3.81 FSH	har-flexicon 5.00/5.08 FSH	
Part numbers	1431xx14402xxx / 1431xx15402xxx	1431xx16402xxx & 1431xx16403xxx / 1431xx17402xxx	
Contact pitch	3.50 mm / 3.81 mm	5 mm / 5.08 mm	
No. of contacts	2-25 poles	2-25 poles	
Rated surge voltage (II/2)	2,5 kV	4 kV	(overvoltage cat. II / pollution degree 2)
Rated surge voltage (III/2)	2,5 kV	4 kV	(overvoltage cat. III / pollution degree 2)
Rated surge voltage (III/3)	2,5 kV	4 kV	(overvoltage cat. III / pollution degree 3)
Rated Voltage	300 V	300 V	
Rated voltage (II/2)	300 V	600 V	(overvoltage cat. II / pollution degree 2)
Rated voltage (III/2)	150 V	300 V	(overvoltage cat. III / pollution degree 2)
Rated voltage (III/3)	150 V	250 V	(overvoltage cat. III / pollution degree 3)
Working current	11 A	15 A	
Usegroup B, rated voltage / current	300 V / 11 A	300 V / 15 A	
Usegroup C, rated voltage / current	- / -	- / -	
Usegroup D, rated voltage / current	300 V / 11 A	300 V / 15 A	
Contact resistance	max. 15 mOhm		
Insulation resistance	min. 10 ⁹ Ohm (500 V DC)		
Temperature range	-40°C ... +110°C		
Termination technology	screwing		
Insertion force	max. 3		
Withdrawal force	min. 1,5		
Hot plugging	No		
Vibration	10-150Hz,0,35mm,5g 2h each axes -> No contact disturbance > 1µs		
RoHS - compliant	Yes		
UL file	E314677		

Isulator material

Material	PA/PPA
Color	green
UL classification	UL 94-V0
Material group acc. to IEC 60664-1	I (CTI > 600)

Contact material


Contact material	Copper alloy
Plating termination zone	Ni
Plating contact zone	Sn

Derating


The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.
The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5

Derating: har-flexicon 3.50/3.81 FSH:

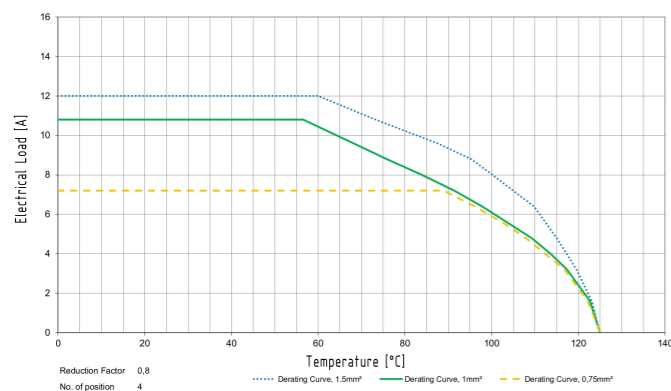

Derating: har-flexicon 5.00/5.08 FSH:

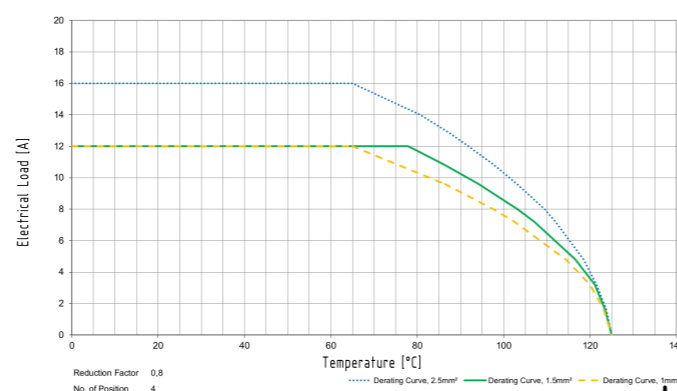

Cable connection

Type	har-flexicon 3.50/3.81 FSH	har-flexicon 5.00/5.08 FSH
Part numbers	1431xx14402xxx & 1431xx15402xxx	1431xx16402xxx & 1431xx16403xxx / 1431xx17402xxx
Conductor size AWG max	14 AWG	12 AWG
Conductor size AWG min	30 AWG	30 AWG
Conductor size solid max	1.5 mm ²	2.5 mm ²
Conductor size solid min	0.5mm ²	0.05 mm ²
Conductor size stranded max	1.5 mm ²	2.5 mm ²
Conductor size stranded min	0.5 mm ²	0.05 mm ²
Conductor size stranded for end sleeve		
Stripping length max	6 mm	7,5 mm
Stripping length min	5 mm	6 mm
Screw thread	M2	M3
Tightening Torque max	0.25 Nm	0.6 Nm
Tightening Torque min	0.2 Nm	0.5 Nm

Packging unit

Type of packaging	No. of poles (xx)	Quantity	MOQ	Index (xxx)	Remark
box	2	300	1	000	
box	3	200	1	000	
box	4 - 5	150	1	000	
box	6 - 12	100	1	000	
box	13 - 20	50	1	000	
box	21 - 25	25	1	000	

1431xx14402xxx



All Dimensions in mm
Original Size DIN A3

Scale
1:1

Free size tol.

Ref.

Sub. DS 14312301201 / 500000077827 / 2014-07-31



All rights reserved

Department EC PD - DE

Created by

TADJE

Inspected by

LEHNERT

Standardisation

HOFFMANN

Date

2015-10-15

State

Final Release

har-flexicon female connector, horizontal, screwing

Doc-Key / ECM-Nr.
100579839/UGD/000/C
500000093564

HARTING Electronics GmbH

D-32339 Espelkamp

Type DS

Number 14312301201

Rev. C

Page 1/1