

# PRODUCT INFO SHEET

Nanmac Corporation

Quality • Performance • Solutions

## Stick-On Surface Thermocouples Ultra-Fast Surface Temperature Measurements A4A Series


| A4A | Calibration   | Length                 | Terminations | PK |
|-----|---------------|------------------------|--------------|----|
| "J" | 1 = 36 inches | 1 = Bare Leads         |              |    |
| "K" | 2 = 72 inches | 2 = Standard Connector |              |    |
| "T" |               | 3 = Spade Lugs         |              |    |
| "E" |               | 4 = Mini Connector     |              |    |

When ordering, specify Part No. by filling in the blocks  
Example: A4A-J-1-1-PK

### NOTES:

- Self Adhesive Kapton tape (1x2 inches)
- Kapton tape rated to 400°F (203°C)
- Milliseconds response times
- Available in J, K, T, & E calibrations
- 30 AWG - SLE grade thermocouple
- FEP extruded lead wire rated to 400°F (203°C)
- Leads length 36 or 72 inches
- Comes in handy packs of 10 Tcs
- Easy Installation - peel and stick
- Various termination styles available

Tolerance on length =  $\pm 1/8$

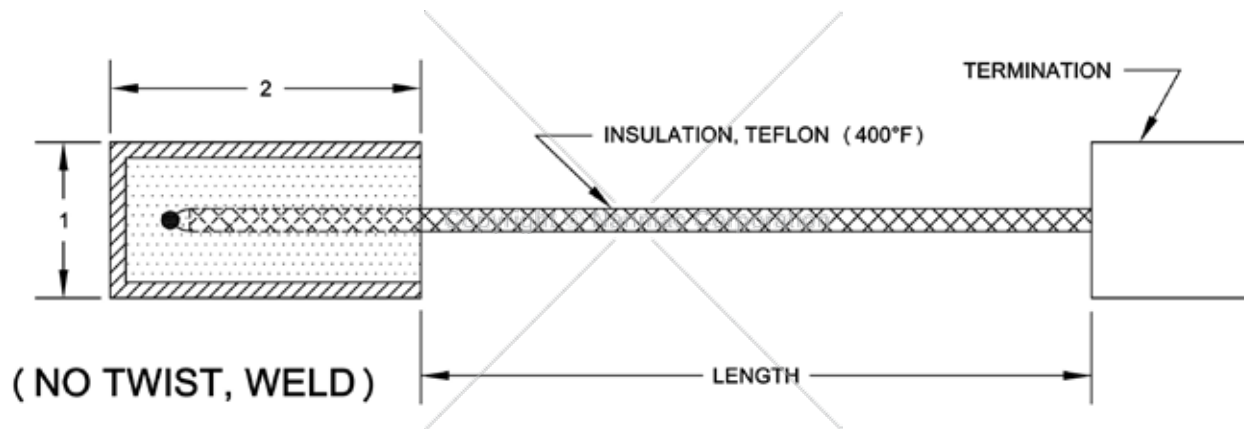


### Terminations


Bare Leads




Standard Connector



Spade Lugs



Mini Connector



PO Box 6640  
1657 Washington St., Bldg. 3  
Holliston, MA 01746  
www.Nanmac.com  
engineering@nanmac.com

Foremost in Temperature Measurement™  
**NANMAC**

US & Canada: 1.800.786.4669  
International: 1.508.872.4811  
Fax: 1.508.879.5450  
info@nanmac.com