

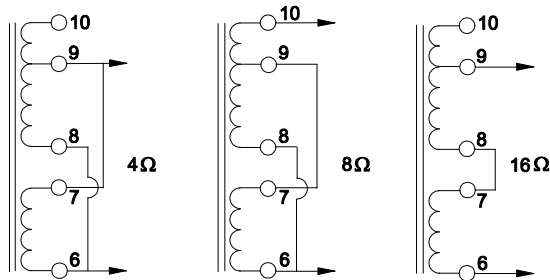


DIMENSIONS:	
A	3.313" ±0.063
B	3.875" ±0.063
C	4.250" ±0.063
D	2.500" ±0.063
E	3.000" ±0.063
F	3.313" ±0.063
G	2.563" ±0.063

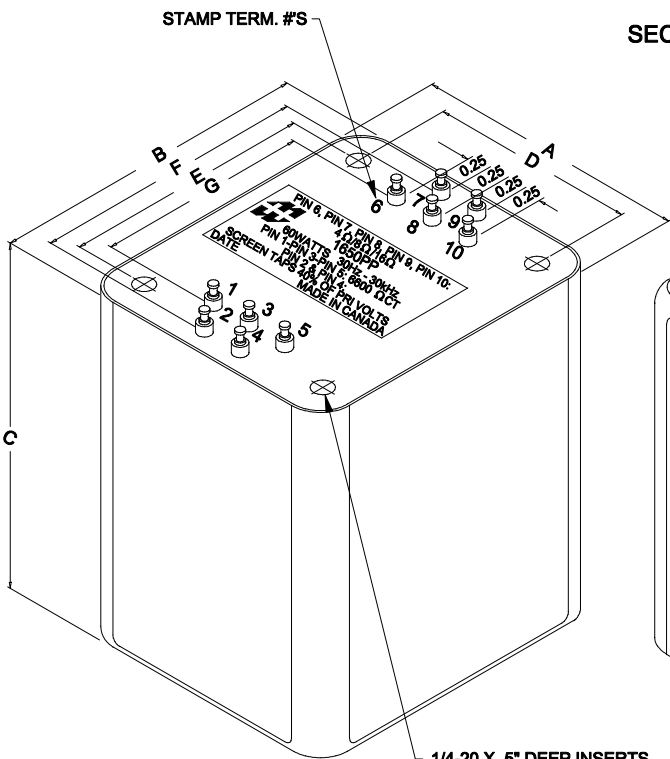

SECONDARY CONNECTIONS

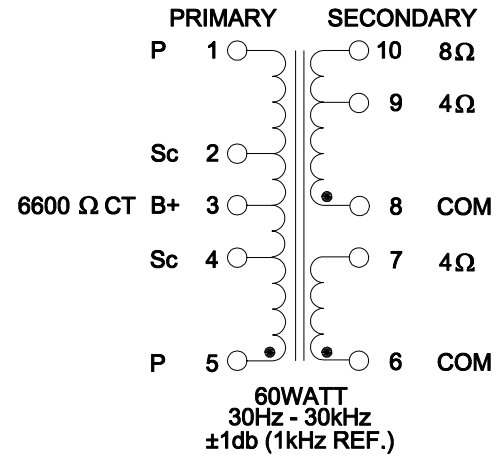

1/4-20 X .5" DEEP INSERTS  
COMPLETE WITH 1/4-20 X 0.5" BRASS SCREWS

**ELECTRICAL DATA:**

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I <sub>ex</sub>	@ 240V, 60Hz, PIN 1 - PIN 5	10mA	Max.
Sec. N.L.V	@ 240V, 60Hz, PIN 1 - PIN 5		
	PIN 2 - PIN 5 =	169.7V	±2%
	PIN 3 - PIN 5 =	120.0V	±2%
	PIN 4 - PIN 5 =	70.26V	±2%
	PIN 6 - PIN 7 =	5.911V	±2%
	PIN 8 - PIN 9 =	5.911V	±2%
	PIN 8 - PIN 10 =	8.364V	±2%
DCR	@ 20°C, PIN 1 - PIN 5 =	160.5 Ω	±20%
	@ 20°C, PIN 2 - PIN 4 =	66.80 Ω	±20%
	@ 20°C, PIN 6 - PIN 7 =	0.230 Ω	±20%
	@ 20°C, PIN 8 - PIN 10 =	0.370 Ω	±20%
HIPOT	PRMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	03/31/15

**HAMMOND MANUFACTURING™** ELECTRONIC DIVISION  
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5  
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: PUSH-PULL ULTRA LINEAR POTTED OUTPUT TRANSFORMER	DWG. NO. 1650PP
DATE: 03/31/15	APP'D. BY:		
	DIMENSIONS: IN(X) MM( )		