


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE, RFS. 27167	09/13/18	MK

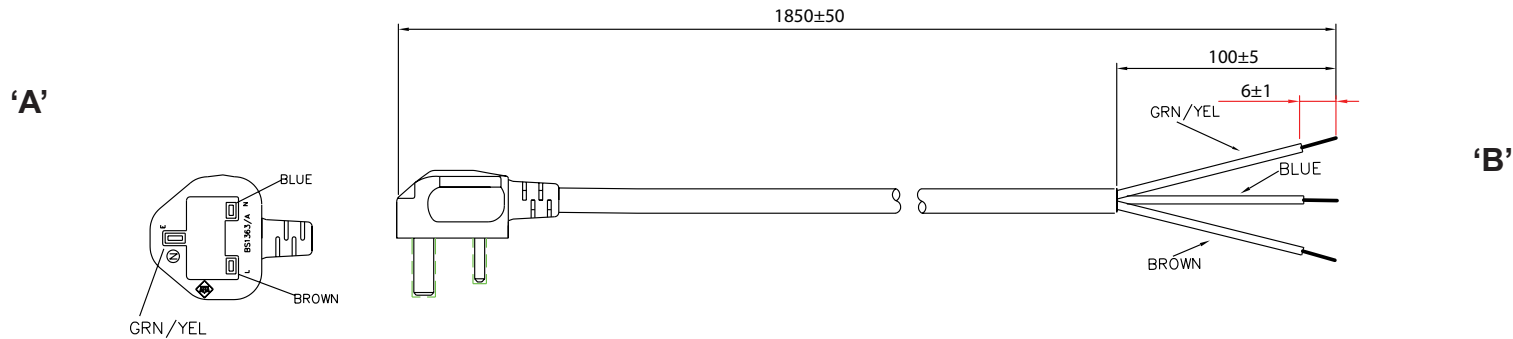

GENERAL SPECIFICATIONS:

RATING: 5A / 250V AC
 CABLE TYPE / SIZE: H05RN-F, # 3 x 1 mm²
 TEMPERATURE RATING: 70° C MIN.
 CONDUCTOR COLORS: BLUE/ BROWN / GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH : 1850 ± 50 mm
 CABLE OUTER DIAMETER: 7.0 ± 0.15 mm
 END 'A' PLUG: UK BS 1363 WITH 5A FUSE
 END 'B' : SEE TERMINATION TABLE
 APPROVALS PLUG: BSI
 APPROVALS CABLE: <HAR>

**PACKING:
 HANKING**

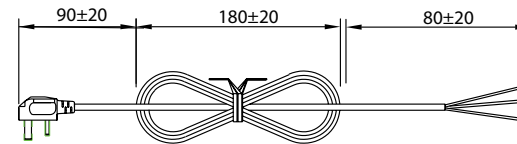

CONDUCTOR TERMINATION TABLE:

Wire	Color	ROJ±5 mm	RIJ±1 mm	Terminal
Neutral	Blue	100	6	Stripped end
Line	Brown	100	6	Stripped end
Ground	Green/Yellow	100	6	Stripped end

RELEASED
 By N.Frost at 11:00 am, Sep 14, 2018



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: BS	DATE: 09/13/18	DWG TITLE: BRITISH NON-DETACHABLE CORDSET		REV. A
DRAWN: NF	DATE: 09/13/18	FSCN No.: G, CC, YL	SIZE A	
APRVD: DMR	DATE: 09/13/18	SCALE: NONE	PART NO: 6104136F000	SHEET 1/1

Contents of this document are subject to change without prior notice

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.