

SMD transformers for automotive grade Current sense transformers



VST series



FEATURES

- A current transformer for SMD type power circuits using ferrite materials.
- High flux density cores have been adopted to achieve miniaturization.
- Measurements of up to 30A peak can be made.
- Operating temperature range: -40 to +130°C (including self-temperature rise)




APPLICATION

- Switching current detection in on-board DC/DC converters and chargers

PART NUMBER CONSTRUCTION

VST	10/9EE	-	200	S1C2
Series name	Core shape		Internal code	Type name

PRODUCT LINEUP

	Rated current NP (A peak)max.	Inductance NS (mH)min.	Measuring conditions	DC resistance NP (mΩ)	NS (Ω)	Withstanding voltage NP-NS Sense: 1mA	Turn ratio
VST10/9EE-200S1C2 10.8x12.1x10 (mm)max. 	20	3.1	1kHz/20mV	1.0max.	2.6±20%	2.0kVrms/1min	1:100
VST10/9EE-205S1C2 10.8x12.1x10 (mm)max. 	20	12.4	1kHz/20mV	1.0max.	8.0±20%	2.0kVrms/1min	1:200
VST12.6EF-280S1C2 16.4x18.2x11.9 (mm)max. 	30	4.0	1kHz/20mV	0.5max.	3.2±30%	2.0kVrms/1min	1:100


VST10/9EE-200S1C2

ELECTRICAL CHARACTERISTICS


CHARACTERISTICS SPECIFICATION TABLE

Part No.	Rated current	Inductance	Measuring conditions	DC resistance		Withstanding voltage NP-NS Sense: 1mA	Turn ratio
	NP (A peak)max.	NS (mH)min.		NP (mΩ)	NS (Ω)		
VST10/9EE-200S1C2	20	3.1	1kHz/20mV	1.0max.	2.6±20%	2.0kVrms/1min	1:100

SHAPE & DIMENSIONS

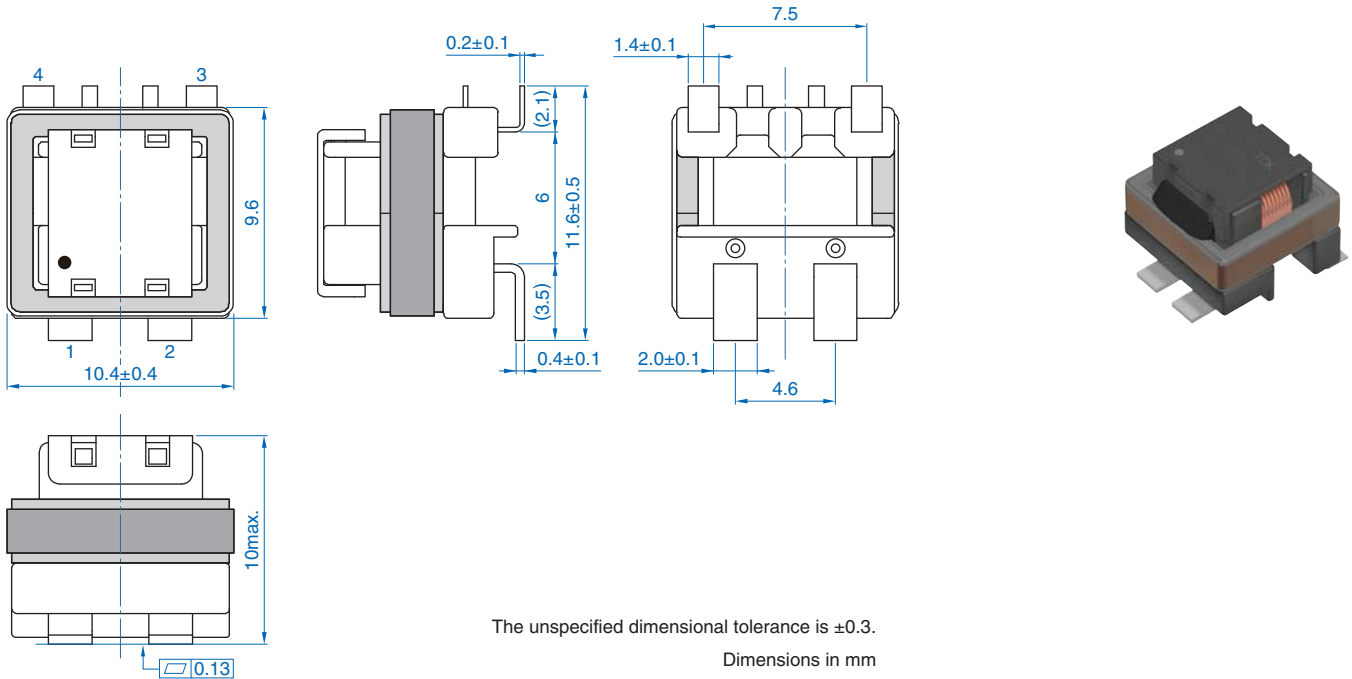

RECOMMENDED LAND PATTERN

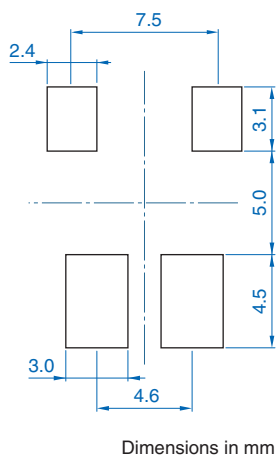

CIRCUIT DIAGRAM




VST10/9EE-205S1C2

ELECTRICAL CHARACTERISTICS


CHARACTERISTICS SPECIFICATION TABLE

Part No.	Rated current	Inductance	Measuring conditions	DC resistance		Withstanding voltage NP-NS Sense: 1mA	Turn ratio
	NP (A peak)max.	NS (mH)min.		NP (mΩ)	NS (Ω)		
VST10/9EE-205S1C2	20	12.4	1kHz/20mV	1.0max.	8.0±20%	2.0kVrms/1min	1:200


SHAPE & DIMENSIONS

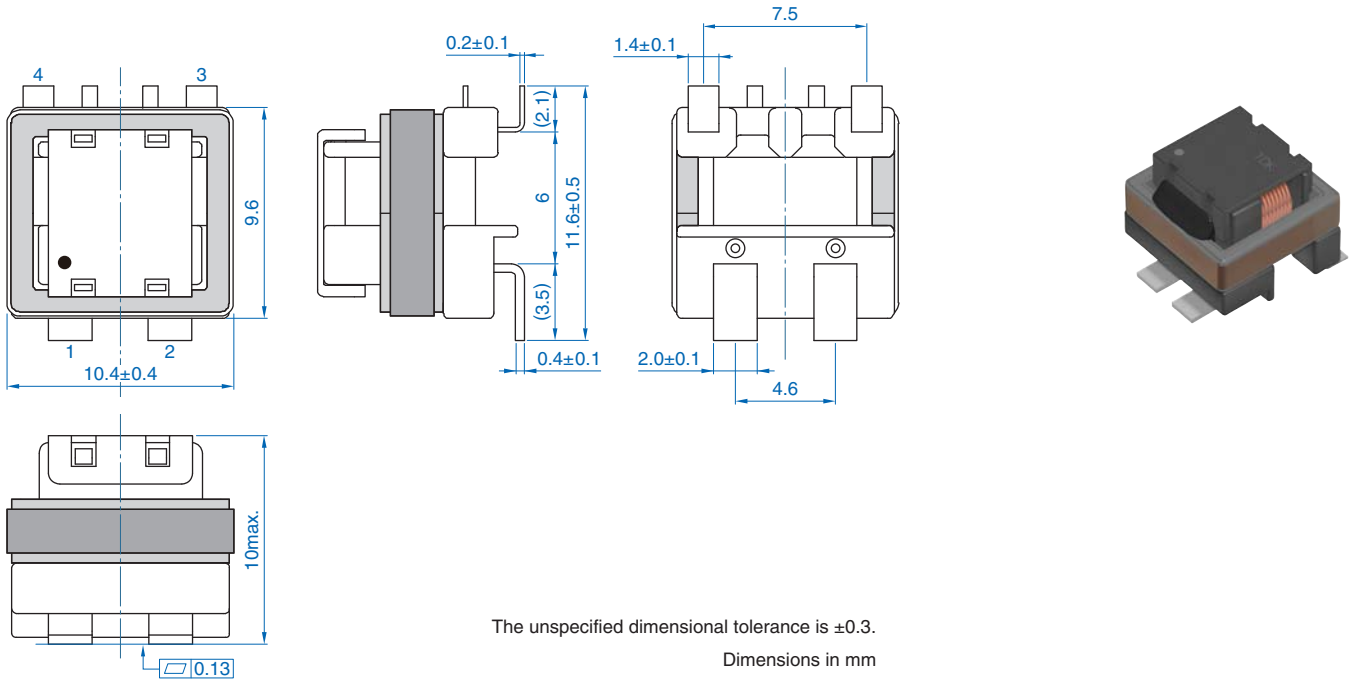

RECOMMENDED LAND PATTERN

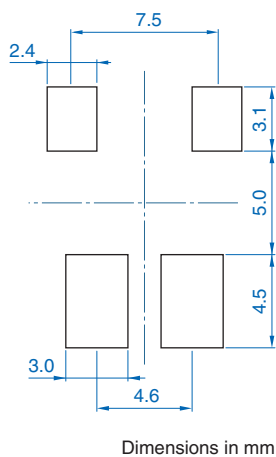

CIRCUIT DIAGRAM




VST12.6EF-280S1C2

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS SPECIFICATION TABLE


Part No.	Rated current	Inductance	Measuring conditions	DC resistance		Withstanding voltage	Turn ratio
	NP (A peak)max.	NS (mH)min.		NP (mΩ)	NS (Ω)	NP-NS Sense: 1mA	
VST12.6EF-280S1C2	30	4.0	1kHz/20mV	0.5max.	3.2±30%	2.0kVrms/1min	1:100

SHAPE & DIMENSIONS

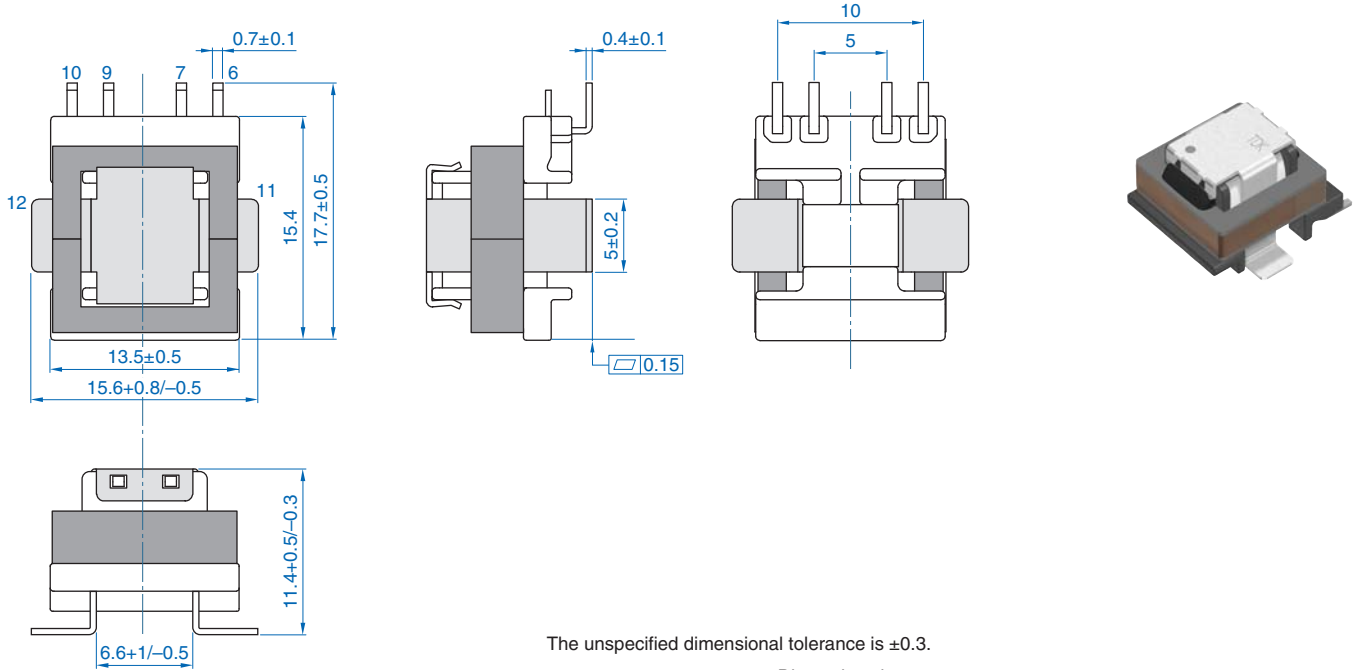

The unspecified dimensional tolerance is ±0.3.
Dimensions in mm

RECOMMENDED LAND PATTERN

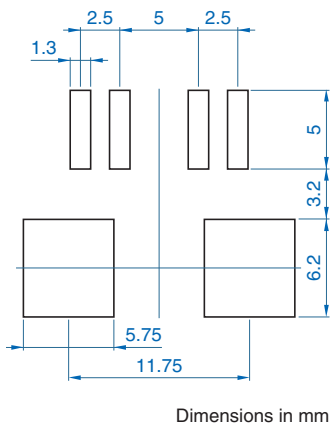


CIRCUIT DIAGRAM



VST series

RECOMMENDED REFLOW PROFILE

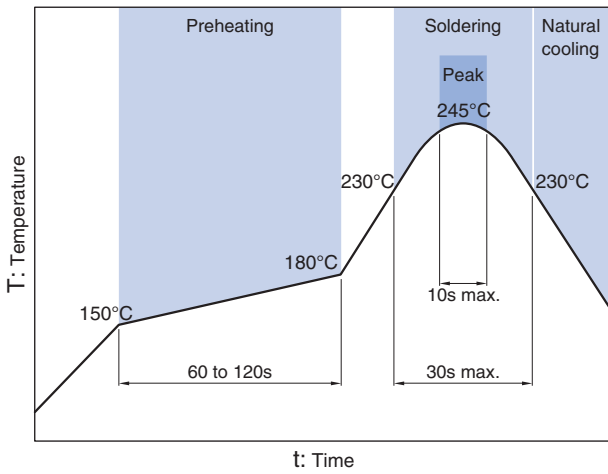

*When mounting the product, use our recommended reflow profile described above.


TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Part No.	Temperature range		Individual weight (g)
	Operating temperature* (°C)	Storage temperature** (°C)	
VST10/9EE-200S1C2	-40 to +130	-40 to +130	1.6
VST10/9EE-205S1C2			
VST12.6EF-280S1C2	-40 to +130	-40 to +130	4

* Operating temperature range includes self-temperature rise.
 ** The storage temperature range is for after the assembly.

PACKAGING STYLE


REEL DIMENSIONS, PACKAGE QUANTITY

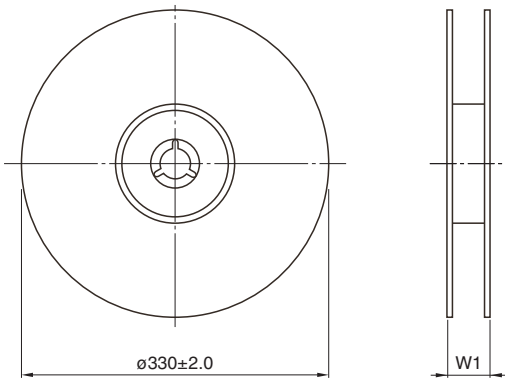

Dimensions in mm

Part No.	W1	Package quantity (pcs/reel)	Package quantity (pcs/box)
VST10/9EE-200S1C2	36.9	250	500
VST10/9EE-205S1C2			
VST12.6EF-280S1C2	36.9	150	300

TAPE DIMENSIONS

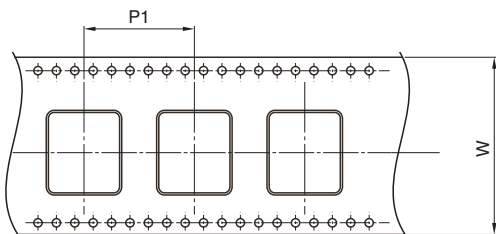

Dimensions in mm

Part No.	P1	W
VST10/9EE-200S1C2	20±0.1	32±0.3
VST10/9EE-205S1C2		
VST12.6EF-280S1C2	24±0.1	32±0.3

Attentions for use

Please read this specifications before using this product by all means.

Attentions for safety

For use of this product, please carefully read this caution and design the application safely.

Attention on designing

- On designing a PCB layout, please refer to the land pattern of this catalogue.
- As leakage magnetic flux generates, please pay attention to the affection by the flux.
It may be concerned as the cause of a malfunction.

Attention on handling

- Please do not use a product which was dropped.
It may be concerned as the cause of a malfunction.
- Since the top of the soldered pins are sharpened, please handle with care.
- When keeping the products, please avoid any dust, mist, water and sunlight .
It may be concerned as the cause of a malfunction.
- In the environment which is exposed by any gas corrosion, i.e. sodium, acid and alkaline atmosphere, please do not use or store.
- When assembling, do not apply excess stress to the product by metal base tool.
It may be concerned as the cause of a malfunction.

Attention

- This product's structure and number of turns (magnetic design) are designed by consideration of the condition of power voltage and circuit drive (drive frequency and Max. on-duty).
Do not operate under the out of the range of the designed condition.
It may be any causes of a damage or a burnout.
- The range of the operating temperature and humidity, by its consideration of the characteristics of component parts and its self temperature rise.
Do not exceed this range for the operation.
It may be any causes of damage or burnout.
- Do not use this product under the condition which is possible contamination of any dust or wrong parts.
It may be any causes of burnout.
- The products listed in this specification are intended for use of any general electronic equipment and transportation equipment (AV equipment, telecommunication applicants, home appliances, amusement equipment, computers, mobile equipment, office machines, measurement equipment, industrial robots, cars, electric trains, ships and etc.) under a normal operation and condition.
- This is not a product which warrants any quality, compatibility or performance to the following uses (hereafter called Special cases of uses) which malfunction, error or defect in those appliances which are required high level of safeness or reliability, may cause the enormous social impact or the risk to human life, health of body, assets or else.
- About any damages which are caused by an use which is out of range or beyond the conditions of our specification, or an use in these special cases below, we are not able to take any responsibilities of the damages.
- If your purpose of this product will be an use beyond the scope or conditions of this specification, or for special cases listed below, please contact with one of our contact windows, in advance.
- In order to meet with an application of our customer, we would like to discuss its specification which will be different to this specification.

<<Special cases of use for>>

- (1) Aerospace/Aviation
- (2) Medical
- (3) Power-generation control
- (4) Nuclear power generation
- (5) Equipment on the sea bed
- (6) Transportation control

- (7) Public information-processing
- (8) Military
- (9) Electric heating, burning equipment
- (10) Disaster prevention/crime prevention equipment
- (11) Safety equipment
- (12) Other applications that are not considered as general purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.