

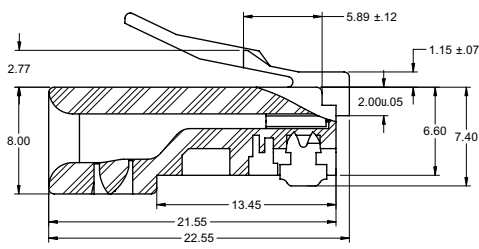



受控 CONTROLLED DOCUMENT			
编号 P/N	32- 5958UL	版本 Rev	0B 日期 Rel'd Date
			Mar 24,08

DRAWING NO. 32-5958UL	
REVISIONS	
A	RELEASE FOR QUOTATION 08-31-05
B	ADDED: NOTE 4 & 5, CONTACT 10-26-05



NOTES:

1. ELECTRICAL SPECIFICATIONS

INSULATION RESISTANCE: 1000 MEGOHMS
WITHSTAND VOLTAGE: 1000V.AC/ MINUTE

2. MECHANICAL SPECIFICATIONS

CONTACT MATERIAL: PHOSPHOR BRONZE 0.3MM THICKNESS
CONTACT PLATING: 50 MICRO-INCH GOLD PLATE OVER 100
MICRO-INCH NICKEL PLATING




HOUSING MATERIAL: POLYCARBONATE
DURABILITY: 1000 CYCLES MIN
UL FLAMABILITY RATING: 94-V0

3. ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40 °C TO +70 °C

4. FOR FLAT OVAL OR ROUND CABLE

5. FOR SOLID OR STRANDED WIRE APPLICATIONS



THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY BETTY.YU	DATE 10-26-05
DECIMALS	CHECKED BY IVON.W	DATE 10-26-05
X	± 0.5	
X.X	± 0.15	APPROVED BY THOMAS
X.XX	± 0.10	DATE 10-26-05
ANGLES	± 0.5°	U/M mm

EMERSON Network Power		Connectivity Solutions
TITLE RJ45 MOD PLUG 50°U,STR,FLAT		
SHEET 1 OF 1	DRAWING NO. 32-5958UL	SIZE C

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.