


# MF72




**CANTHERM**

*Supplying high-quality bimetal and thermal sensor products.*

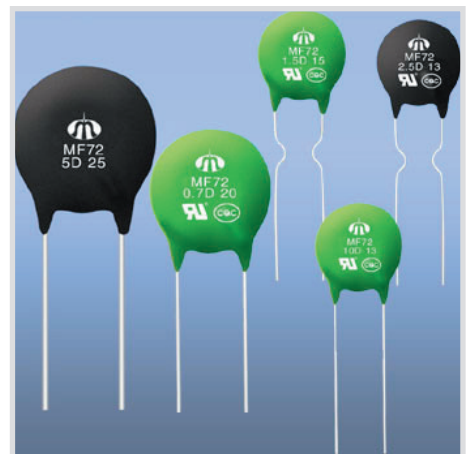

**Power NTC Thermistor**


# MF72

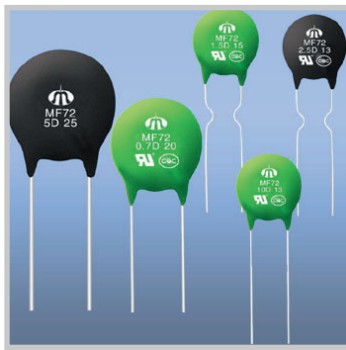


**Power NTC Thermistor.** The MF72 series Power NTC Thermistors provide inrush current suppression for sensitive electronics. Connecting a MF72 in series with the power source will limit the current surges typically created at turn on. Once the circuit is energized the resistance of the MF72 will decrease rapidly to a very low value, power consumption can be ignored and there will be no effect on normal operating current. Using the MF72 Power NTC Thermistor is a most cost-effective way to curb surge current and protect sensitive electronics from damage.

## Specification


### Non-Branded Marking



### Branded Marking

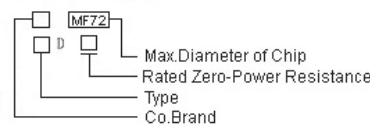

## Dimensions (mm)

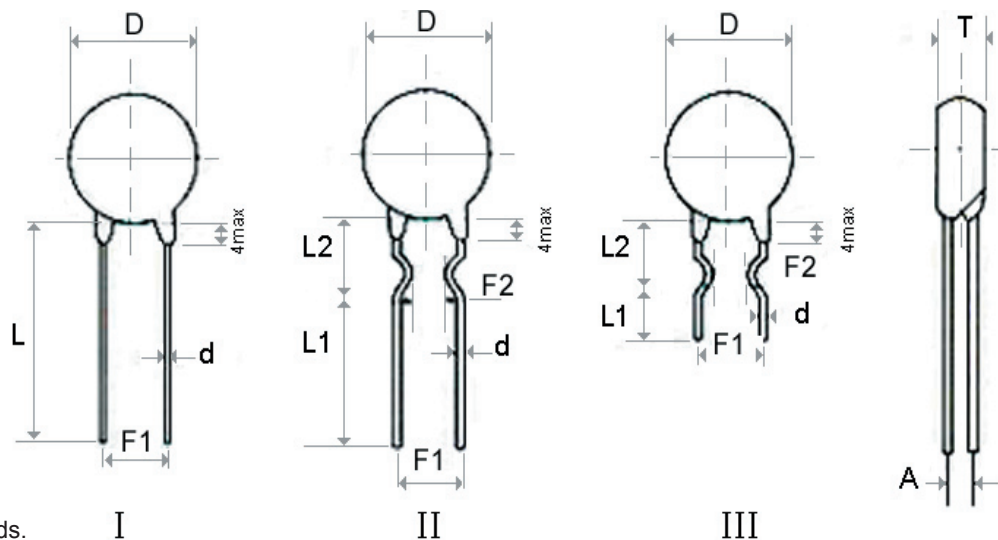

Add suffix "L" + Fig. #  
to specify optional leads.

Part No. / Dim(mm) / Sym	Dmax	Tmax	d +/- 0.05 Fig. II / I	F1 +/-1 Fig. II / I	F2 +/-1.5 Fig. II / I	Straight Lead Wire		Curved Lead Wire		A +/- .5
						Lmin.	b L1min	L2+/-2		
MF72- □D5	7	5	0.6 / 0.45	5 / 2.5	3	25 *	17/5	8/5	1.65	
MF72- □D7	9	5	0.6	5	3	25	17/5	8/5	1.9	
MF72- □D9	11	5.5	0.8 / 0.6	7.5 / 5	5 / 3	25	17/5	8/5	2.3	
MF72- □D11	13	5.5	0.8	7.5 / 5	5 / 3	25	17/5	8/5	2.6	
MF72- □D13	15.5	6	0.8	7.5	5	25	17/5	8/5	2.6	
MF72- □D15	17.5	6	0.8	10 / 7.5	5	25	17/5	8/5	2.8	
MF72- □D20	22.5	7	1.0	10 / 7.5	/	25 *	/	/	3.5	
MF72- □D25	27.5	8	1.0	10	/	25 *	/	/	3.5	

### Remark

a, rated zero-power resistance

b, 17/5 17 indicates the long bent lead wire, 5 indicates the short bent lead wire (Fig. III)

Illustration: In general, the long bent lead wire is used, see figure II

\* Straight Leads are Standard

## Application

Can be installed into the power circuits of:

- Power supplies and inverters
- Uninterruptible Power Supplies
- Energy saving lamps
- Electronic Ballasts
- Filament Protection of various types of lamps
- Some types of heaters
- For higher power circuits ask about the MF73 and MF74 series surge suppressors.

## Characteristics

- Small Size and fast response
- High Power handling capability
- Fast response to surge current
- High material constant (B value)
- Low residual resistance
- Wide operating temperature range -55 to +200C
- R25 allowable tolerance is  $\pm 20\%$
- Long-term Stability and Reliability
- UL 1434 File# E241319
- CQC File# 04001010556

## Main Techno-Parameter

Operating Temperature: -55 to 200°C

Part No.	R <sub>25</sub> (Ω)	Max. Steady State Current (A)	Approx. R of Max. Current (Ω)	Dissip. Coef. (mW/°C)	Thermal Time Constant (S)	Max. Load Capacitance in uF		UL
						120 VAC	240 VAC	
MF72-5D5	5	1	0.353	6	20	188	47	
MF72-10D5	10	0.7	0.771	6	20	188	47	
MF72-60D5	60	0.5	1.878	6	18	188	47	
MF72-200D5	200	0.1	18.70	6	18	88	22	
MF72-5D7	5	2	0.283	10	30	224	56	
MF72-8D7	8	1	0.539	9	28	224	56	
MF72-10D7	10	1	0.616	9	27	224	56	
MF72-12D7	12	1	0.816	9	27	224	56	
MF72-16D7	16	0.7	1.003	9	27	224	56	
MF72-22D7	22	0.6	1.108	9	27	224	56	
MF72-33D7	33	0.5	1.485	10	28	188	47	
MF72-200D7	200	0.2	11.65	11	28	188	47	
MF72-3D9	3	4	0.120	11	35	272	68	✓
MF72-4D9	4	3	0.190	11	35	272	68	✓
MF72-5D9	5	3	0.210	11	34	272	68	✓
MF72-6D9	6	2	0.315	11	34	272	68	✓
MF72-8D9	8	2	0.400	11	32	400	100	✓
MF72-10D9	10	2	0.458	11	32	400	100	✓
MF72-12D9	12	1	0.652	11	32	400	100	✓
MF72-16D9	16	1	0.802	11	31	400	100	✓
MF72-20D9	20	1	0.864	11	30	600	150	✓
MF72-22D9	22	1	0.950	11	30	600	150	✓
MF72-30D9	30	1	1.022	11	30	600	150	✓
MF72-33D9	33	1	1.124	11	30	600	150	✓
MF72-50D9	50	1	1.252	11	30	600	150	✓
MF72-60D9	60	0.8	1.502	11	30	600	150	✓
MF72-80D9	80	0.8	2.010	11	30	272	68	✓

Part No.	R <sub>25</sub> (Ω)	Max. Steady State Current (A)	Approx. R of Max. Current (Ω)	Dissip. Coef. (mW/°C)	Thermal Time Constant (S)	Max. Load Capacitance in uF		UL
						120 VAC	240 VAC	
MF72-120D9	120	0.8	3.015	11	30	272	68	✓
MF72-200D9	200	0.5	5.007	11	32	188	47	✓
MF72-400D9	400	0.2	30.30	11	32	188	47	✓
MF72-2.5D11	2.5	5	0.095	13	43	600	150	✓
MF72-3D11	3	5	0.100	13	43	600	150	✓
MF72-4D11	4	4	0.150	13	44	600	150	✓
MF72-5D11	5	4	0.156	13	45	600	150	✓
MF72-6D11	6	3	0.240	13	45	880	220	✓
MF72-8D11	8	3	0.255	14	47	880	220	✓
MF72-10D11	10	3	0.275	14	47	880	220	✓
MF72-12D11	12	2	0.462	14	48	880	220	✓
MF72-16D11	16	2	0.470	14	50	880	220	✓
MF72-20D11	20	2	0.512	15	52	880	220	✓
MF72-22D11	22	2	0.563	15	52	880	220	✓
MF72-30D11	30	1.5	0.667	15	52	880	220	✓
MF72-33D11	33	1.5	0.734	15	52	880	220	✓
MF72-50D11	50	1.5	1.021	15	52	880	220	✓
MF72-60D11	60	1.5	1.215	15	52	880	220	✓
MF72-80D11	80	1.2	1.656	15	52	600	150	✓
MF72-1.3D13	1.3	7	0.062	13	60	880	220	✓
MF72-1.5D13	1.5	7	0.073	13	60	880	220	✓
MF72-2.5D13	2.5	6	0.088	13	60	880	220	✓
MF72-3D13	3	6	0.092	14	60	880	220	✓
MF72-4D13	4	5	0.120	15	67	880	220	✓
MF72-5D13	5	5	0.125	15	68	880	220	✓
MF72-6D13	6	4	0.170	15	65	880	220	✓
MF72-7D13	7	4	0.188	15	65	1320	330	✓

## — Main Techno-Parameter (cont.)

Operating Temperature: -55 to 200°C

Part No.	R <sub>25</sub> (Ω)	Max. Steady State Current (A)	Approx. R of Max. Current (Ω)	Dissip. Coef. (mW/°C)	Thermal Time Constant (S)	Max. Load Capacitance in uF		UL
						120 VAC	240 VAC	
MF72-8D13	8	4	0.194	15	60	1320	330	√
MF72-10D13	10	4	0.206	15	65	1320	330	√
MF72-12D13	12	3	0.316	16	65	1320	330	√
MF72-15D13	15	3	0.335	16	60	1320	330	√
MF72-16D13	16	3	0.338	16	60	1320	330	√
MF72-20D13	20	3	0.372	16	65	1320	330	√
MF72-30D13	30	2.5	0.517	16	65	1320	330	√
MF72-47D13	47	2	0.810	17	65	880	220	√
MF72-120D13	120	1.5	2.124	16	65	880	220	√
MF72-1.3D15	1.3	8	0.048	18	68	1320	330	√
MF72-1.5D15	1.5	8	0.052	19	69	1320	330	√
MF72-3D15	3	7	0.075	18	76	1320	330	√
MF72-5D15	5	6	0.112	20	76	1880	470	√
MF72-6D15	6	5	0.155	20	80	1880	470	√
MF72-7D15	7	5	0.173	20	80	1880	470	√
MF72-8D15	8	5	0.178	20	80	1880	470	√
MF72-10D15	10	5	0.180	20	75	1880	470	√
MF72-12D15	12	4	0.250	20	75	1880	470	√
MF72-15D15	15	4	0.268	21	85	1880	470	√
MF72-16D15	16	4	0.276	21	70	1880	470	√
MF72-20D15	20	4	0.288	17	86	1880	470	√
MF72-30D15	30	3.5	0.438	18	75	1320	330	√

Part No.	R <sub>25</sub> (Ω)	Max. Steady State Current (A)	Approx. R of Max. Current (Ω)	Dissip. Coef. (mW/°C)	Thermal Time Constant (S)	Max. Load Capacitance in uF		UL
						120 VAC	240 VAC	
MF72-47D15	47	3	0.680	21	86	1320	330	√
MF72-120D15	120	2.5	1.652	22	87	1320	330	√
MF72-0.7D20	0.7	12	0.018	25	112	1880	470	√
MF72-1.3D20	1.3	9	0.037	24	113	1880	470	√
MF72-3D20	3	8	0.055	24	113	1880	470	√
MF72-5D20	5	7	0.087	23	112	2240	560	√
MF72-6D20	6	6	0.113	25	114	2240	560	√
MF72-8D20	8	6	0.142	25	115	2240	560	√
MF72-10D20	10	6	0.162	24	113	2240	560	√
MF72-12D20	12	5	0.195	24	114	2720	680	√
MF72-16D20	16	5	0.212	25	113	2720	680	√
MF72-0.7D25	0.7	13	0.014	30	151	2240	560	
MF72-1.5D25	1.5	10	0.027	30	152	2240	560	
MF72-3D25	3	9	0.044	32	150	2240	560	
MF72-5D25	5	8	0.070	32	151	2720	680	
MF72-8D25	8	7	0.114	33	151	2720	680	
MF72-10D25	10	7	0.130	32	150	2720	680	
MF72-12D25	12	6	0.156	32	150	3280	820	
MF72-16D25	16	6	0.160	35	152	3280	820	

Note: Unless otherwise specified, the allowable tolerance of R<sub>25</sub> is +/- 20%. Specifications may change without notice.



**CANTHERM**  
Supplying high-quality bimetal and thermal sensor products.

8415 Mountain Sights Avenue • Montreal (Quebec), H4P 2B8, Canada  
Tel: (514) 739-3274 • 1-800-561-7207 • Fax: (514) 739-2902 • E-mail: sales@cantherm.com

Website: [www.cantherm.com](http://www.cantherm.com) | Division of Microtherm

2011/Mar MF72