



FAG

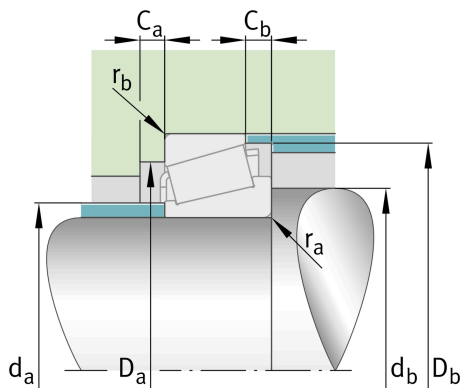
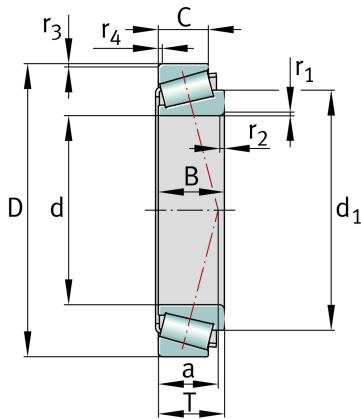
**32060-X**

Tapered roller bearing

Schaeffler ID:  
0190548660000

Tapered roller bearings 320, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

## Technical information

**Main Dimensions & Performance Data**

d	300 mm	Bore diameter
D	460 mm	Outside diameter
B	100 mm	Width, inner ring
C	74 mm	Width, outer ring
T	100 mm	Width, total
$C_r$	1,500,000 N	Basic dynamic load rating, radial
$C_{0r}$	2,850,000 N	Basic static load rating, radial
$C_{ur}$	295,000 N	Fatigue load limit, radial
$n_G$	1,380 1/min	Limiting speed
$n_{gr}$	750 1/min	Thermal speed rating
$\approx m$	57 kg	Weight

**Mounting dimensions**

$d_{a \max}$	329 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	318 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	404 mm	Minimum diameter of housing shoulder
$D_{a \max}$	442 mm	Maximum diameter of housing shoulder
$D_{b \min}$	439 mm	Minimum diameter of housing shoulder
$C_{a \min}$	15 mm	Minimum axial space
$C_{b \min}$	26 mm	Minimum axial space
$r_{a \max}$	5 mm	Maximum fillet radius of shaft
$r_{b \max}$	4 mm	Maximum fillet radius of housing

### Dimensions

$r_{1,2 \text{ min}}$	5 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	4 mm	Minimum chamfer dimension of outer ring back face
a	98 mm	Distance between the apexes of the pressure cones
$d_1$	375 mm	Guidance rib diameter of inner ring

### Temperature range

$T_{\text{min}}$	-30 °C	Operating temperature min.
$T_{\text{max}}$	200 °C	Operating temperature max.

### Calculation factors

e	0.43	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
Y	1.38	Dynamic axial load factor
$Y_0$	0.76	Static axial load factor

### Additional information

	T4GD300	Comparative designation to ISO 10317 and ISO 355
--	---------	--