



FAG



33019

Tapered roller bearing

Schaeffler ID:
0167133970000

Tapered roller bearings 330, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

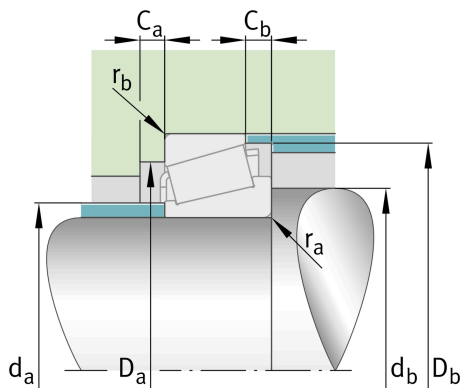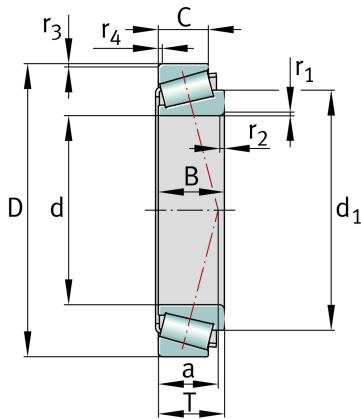

Main Dimensions & Performance Data

| | | |
|-------------|-------------|-----------------------------------|
| d | 95 mm | Bore diameter |
| D | 145 mm | Outside diameter |
| B | 39 mm | Width, inner ring |
| C | 32.5 mm | Width, outer ring |
| T | 39 mm | Width, total |
| C_r | 221,000 N | Basic dynamic load rating, radial |
| C_{0r} | 380,000 N | Basic static load rating, radial |
| C_{ur} | 47,500 N | Fatigue load limit, radial |
| n_G | 4,600 1/min | Limiting speed |
| n_{gr} | 3,000 1/min | Thermal speed rating |
| $\approx m$ | 2.321 kg | Weight |

Mounting dimensions

| | | |
|--------------|--------|--------------------------------------|
| $d_{a \max}$ | 104 mm | Maximum diameter of shaft shoulder |
| $d_{b \min}$ | 104 mm | Minimum diameter of shaft shoulder |
| $D_{a \min}$ | 131 mm | Minimum diameter of housing shoulder |
| $D_{a \max}$ | 136 mm | Maximum diameter of housing shoulder |
| $D_{b \min}$ | 139 mm | Minimum diameter of housing shoulder |
| $C_{a \min}$ | 7 mm | Minimum axial space |
| $C_{b \min}$ | 6.5 mm | Minimum axial space |
| $r_{a \max}$ | 2 mm | Maximum fillet radius of shaft |
| $r_{b \max}$ | 1.5 mm | Maximum fillet radius of housing |

Dimensions

| | | |
|-----------------------|----------|---------------------------------------------------|
| $r_{1,2 \text{ min}}$ | 2 mm | Minimum chamfer dimension of inner ring back face |
| $r_{3,4 \text{ min}}$ | 1.5 mm | Minimum chamfer dimension of outer ring back face |
| a | 29 mm | Distance between the apexes of the pressure cones |
| d_1 | 120.2 mm | Guidance rib diameter of inner ring |

Temperature range

| | | |
|------------------|--------|----------------------------|
| T_{min} | -30 °C | Operating temperature min. |
| T_{max} | 120 °C | Operating temperature max. |

Calculation factors

| | | |
|-------|------|--------------------------------------------------------------------------------------|
| e | 0.28 | Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y |
| Y | 2.16 | Dynamic axial load factor |
| Y_0 | 1.19 | Static axial load factor |

Additional information

| | | |
|--|---------|--------------------------------------------------|
| | T2CE095 | Comparative designation to ISO 10317 and ISO 355 |
|--|---------|--------------------------------------------------|