





FAG

33008

Tapered roller bearing

Tapered roller bearings 330, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

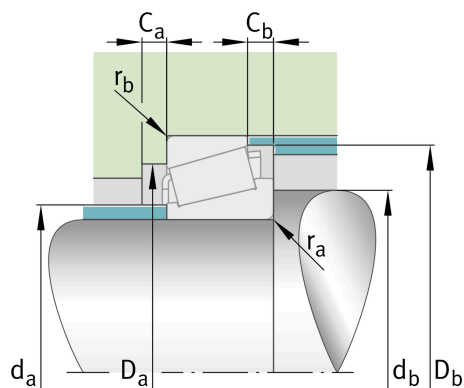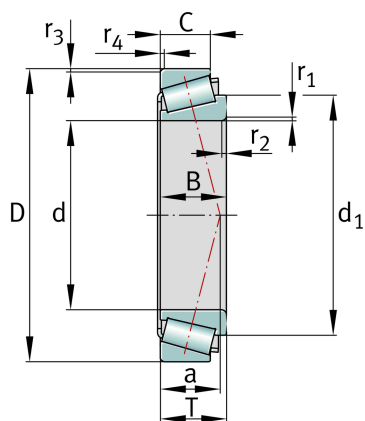

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	68 mm	Outside diameter
B	22 mm	Width, inner ring
C	18 mm	Width, outer ring
T	22 mm	Width, total
C_r	62,000 N	Basic dynamic load rating, radial
C_{0r}	87,000 N	Basic static load rating, radial
C_{ur}	10,700 N	Fatigue load limit, radial
n_G	10,400 1/min	Limiting speed
n_{gr}	6,300 1/min	Thermal speed rating
$\approx m$	0.34 kg	Weight

Mounting dimensions

$d_{a \max}$	46 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	46 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	61 mm	Minimum diameter of housing shoulder
$D_{a \max}$	62 mm	Maximum diameter of housing shoulder
$D_{b \min}$	65 mm	Minimum diameter of housing shoulder
$C_{a \min}$	4 mm	Minimum axial space
$C_{b \min}$	4 mm	Minimum axial space
$r_{a \max}$	1 mm	Maximum fillet radius of shaft
$r_{b \max}$	1 mm	Maximum fillet radius of housing

Dimensions

$r_{1,2 \text{ min}}$	1 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	1 mm	Minimum chamfer dimension of outer ring back face
a	15 mm	Distance between the apexes of the pressure cones
d_1	55.2 mm	Guidance rib diameter of inner ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0.28	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	2.12	Dynamic axial load factor
Y_0	1.17	Static axial load factor

Additional information

	T2BE040	Comparative designation to ISO 10317 and ISO 355
--	---------	--