


# SM2000

## Magnetic-inductive flow meter

SMR21XGXFRKG/US

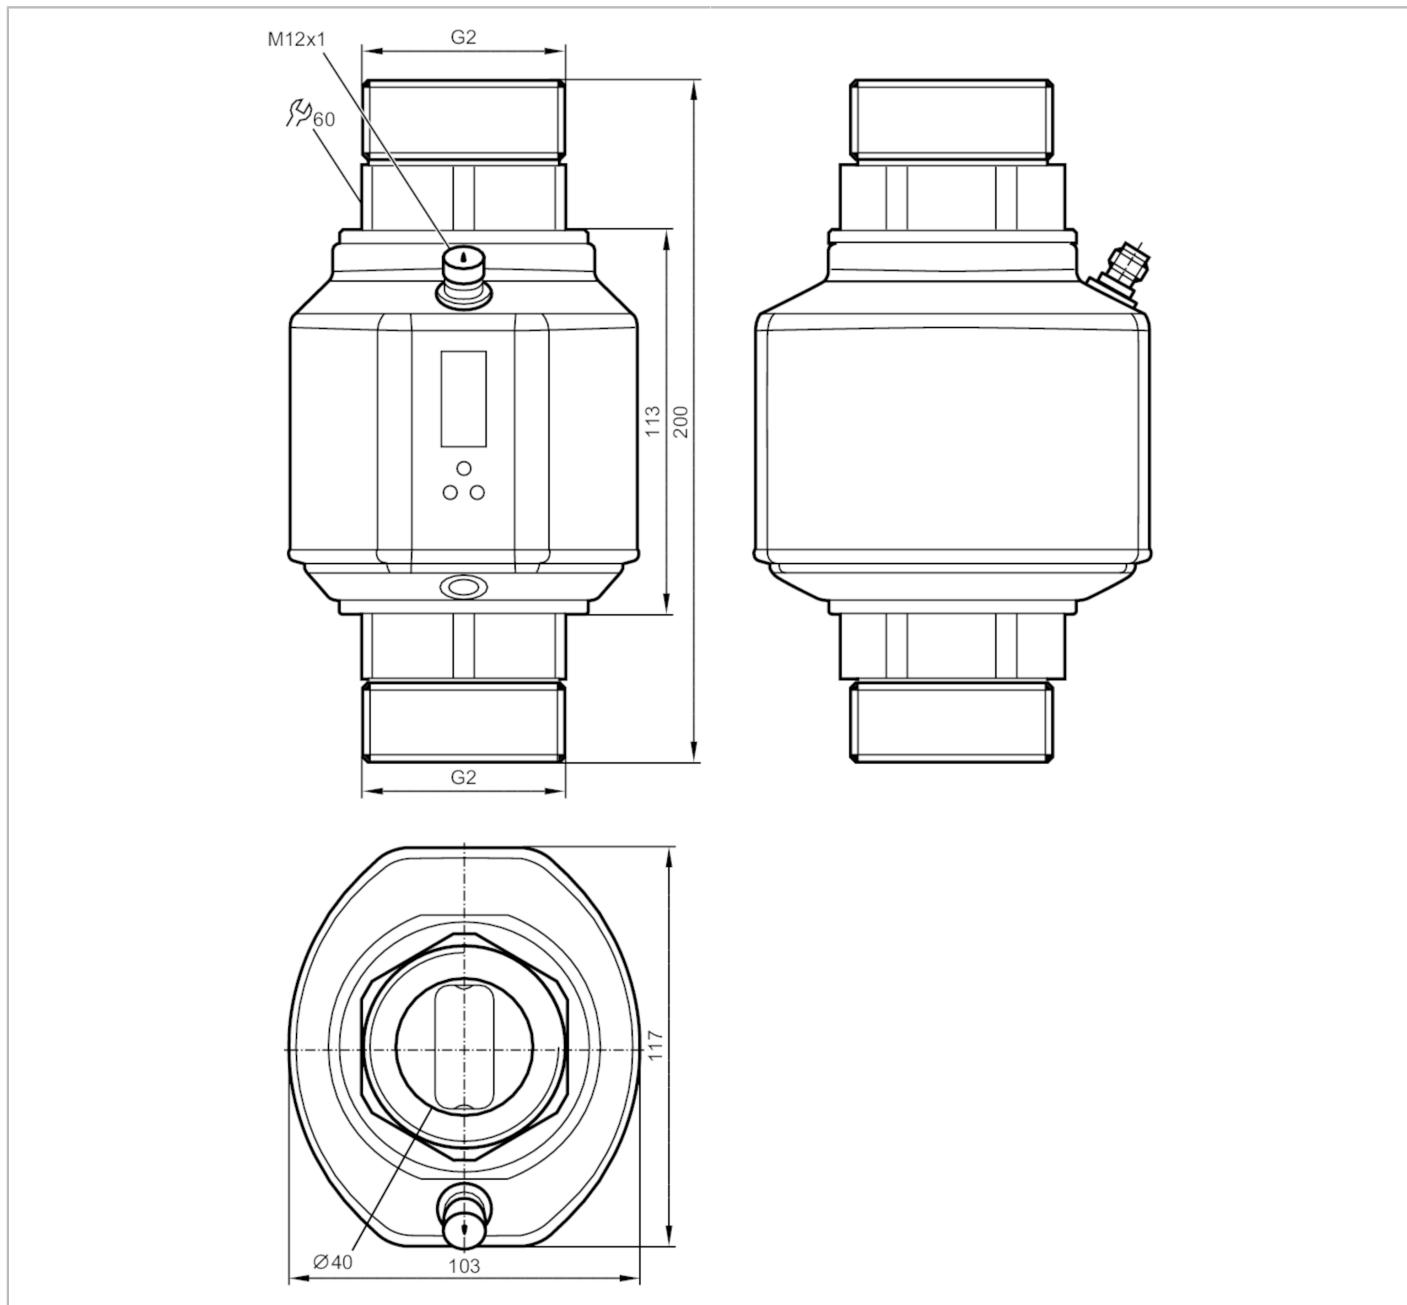

### Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Measuring range	5...600 l/min	0.3...36 m <sup>3</sup> /h
Process connection	threaded connection G 2 DN50 flat seal	

# SM2000



## Magnetic-inductive flow meter

SMR21XGXFRKG/US

Application		
System		gold-plated contacts
Application		Totalizer function; empty pipe detection; for industrial applications
Installation		connection to pipe by means of an adapter
Media		Conductive liquids; water; water-based media
Note on media		conductivity: $\geq 20 \mu\text{S}/\text{cm}$ viscosity: $< 70 \text{ mm}^2/\text{s}$ ( $40^\circ\text{C}$ )
Medium temperature	[°C]	-10...70
Pressure rating	[bar]	16
Pressure rating	[Mpa]	1.6
MAWP (for applications according to CRN)	[bar]	16.5
Electrical data		
Operating voltage	[V]	18...32 DC; (according to EN 50178 SELV/PELV)
Current consumption	[mA]	< 150
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	5
Inputs / outputs		
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1
Inputs		
Inputs		counter reset
Outputs		
Total number of outputs		2
Output signal		switching signal; analog signal; pulse signal; frequency signal; IO-Link; (configurable)
Electrical design		PNP/NPN
Number of digital outputs		2
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2
Permanent current rating of switching output DC	[mA]	250; (per output)
Number of analog outputs		1
Analog current output	[mA]	4...20; (scalable)
Max. load	[Ω]	500
Analog voltage output	[V]	0...10; (scalable)
Min. load resistance	[Ω]	2000
Pulse output		flow rate meter
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Frequency of the output	[Hz]	0.1...10000

# SM2000



## Magnetic-inductive flow meter

SMR21XGXFTRKG/US

Measuring/setting range				
Measuring range	5...600 l/min	0.3...36 m <sup>3</sup> /h		
Display range	-720...720 l/min	-43.2...43.2 m <sup>3</sup> /h		
Resolution	0.5 l/min	0.02 m <sup>3</sup> /h		
Set point SP	8...600 l/min	0.5...36 m <sup>3</sup> /h		
Reset point rP	5...597 l/min	0.3...35.8 m <sup>3</sup> /h		
Analog start point ASP	0...480 l/min	0...28.8 m <sup>3</sup> /h		
Analog end point AEP	120...600 l/min	7.2...36 m <sup>3</sup> /h		
Low flow cut-off LFC	< 15 l/min	< 0.9 m <sup>3</sup> /h		
In steps of	0.5 l/min	0.02 m <sup>3</sup> /h		
Measuring dynamics	1:120			
Volumetric flow quantity monitoring				
Pulse value	0.0001...600 × 10 <sup>3</sup> m <sup>3</sup>			
In steps of	0.0001 m <sup>3</sup>			
Pulse length [s]	0.008...2			
Temperature monitoring				
Measuring range [°C]	-20...80			
Display range [°C]	-40...100			
Resolution [°C]	0.2			
Set point SP [°C]	-19.2...80			
Reset point rP [°C]	-19.6...79.6			
Analog start point [°C]	-20...60			
Analog end point [°C]	0...80			
In steps of [°C]	0.2			
Accuracy / deviations				
Flow monitoring				
Accuracy (in the measuring range)	± (0,8 % MW + 0,5 % MEW)			
Repeatability	± 0,2% MEW			
Temperature monitoring				
Temperature drift	± 0,0333 °C / K			
Accuracy [K]	± 1 (bei 25 °C, Q > 15 l/min)			
Reaction times				
Flow monitoring				
Response time [s]	0.35; (dAP = 0)			
Delay time programmable dS, dr [s]	0...50			
Damping for the switching output dAP [s]	0...5			
Temperature monitoring				
Dynamic response T05 / T09 [s]	T09 = 3 (Q > 15 l/min)			
Software / programming				
Parameter setting options	Flow monitoring; quantity meter; Preset counter; Temperature monitoring; hysteresis / window; normally open / closed; switching logic; current/voltage/frequency/pulse output; Start-up delay; display can be deactivated; Display unit; empty pipe detection			

# SM2000

## Magnetic-inductive flow meter

SMR21XGXRKG/US



Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9 CDV
Profiles		Smart Sensor; Process Data Variable; Device Identification
SIO mode		yes
Required master port class		A
Process data analogue		3
Process data binary		2
Min. process cycle time [ms]		5
Supported DeviceIDs	Type of operation	DeviceID
	default	389
Operating conditions		
Ambient temperature [°C]		-10...60
Storage temperature [°C]		-25...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 60947-5-9	
	model number	004MI
	accuracy class	-
CPA approval	maximum allowable error	± 1,5 % FS
	Q (min)	0,3 m³/h
	Q (t)	-
	Q (max)	36 m³/h
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF [years]		78
UL approval	UL approval number	I008
	File number UL	E174189
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request	
Mechanical data		
Weight [g]		3208
Material	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti ); PEI; FKM; PBT-GF20; TPE-U	
Materials (wetted parts)	stainless steel (1.4404 / 316L); stainless steel (1.4571/316Ti ); PEEK; Centellen; FKM	
Process connection	threaded connection G 2 DN50 flat seal	
Displays / operating elements		
Display	Display unit	6 x LED, green (l/min, m³/h, l, m³, 10³, °C)
	Switching status	2 x LED, yellow
	Measured values	alphanumeric display, 4-digit
	Programming	alphanumeric display, 4-digit
Accessories		
Items supplied	sealings: 2, Centellen	
	Label	

# SM2000



## Magnetic-inductive flow meter

SMR21XGXFRKG/US

### Remarks

Remarks

MW = Measured value

Pack quantity

MEW = Final value of the measuring range

1 pcs.

### Electrical connection


Connector: 1 x M12; Contacts: gold-plated



## Magnetic-inductive flow meter

SMR21XGXFRKG/US

### Connection

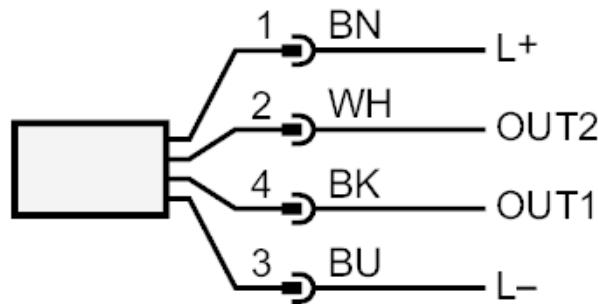

Colours to DIN EN 60947-5-2


- OUT1:  
Switching output empty pipe detection  
Switching output Volumetric flow quantity monitoring  
Frequency output Volumetric flow quantity monitoring  
Pulse output quantity meter  
signal output Preset counter  
IO-Link
- OUT2:  
Switching output empty pipe detection  
Switching output Volumetric flow quantity monitoring  
Switching output Temperature monitoring  
analog output Volumetric flow quantity monitoring  
analog output Temperature monitoring  
Input counter reset  
Core colors :
- |      |       |
|------|-------|
| BK = | black |
| BN = | brown |
| BU = | blue  |
| WH = | white |



### Diagrams and graphs

Pressure loss

dP [mbar] DN50

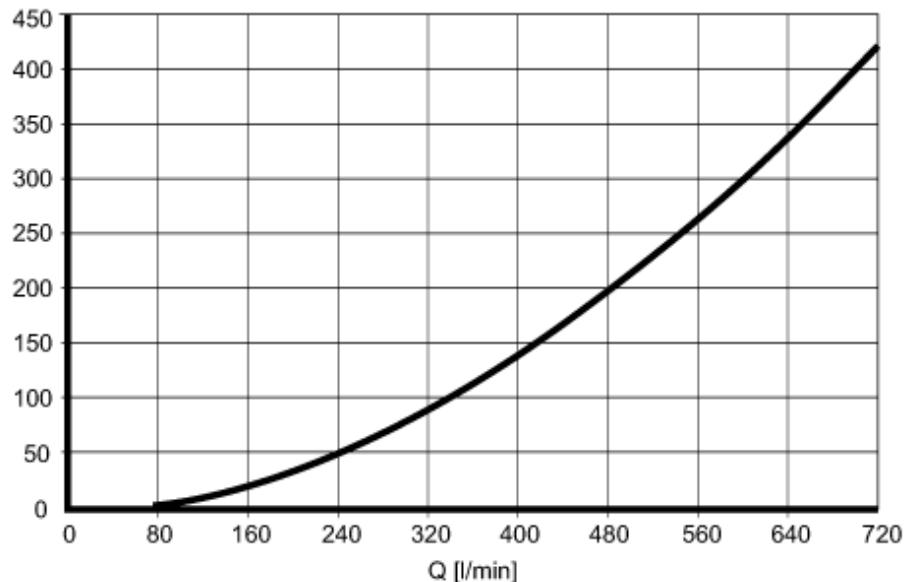

dP Pressure loss

Q volumetric flow quantity