



Analog monitoring relay Fill level monitoring Resistance monitoring from 2 to 200 kohm Overshoot and undershoot Supply voltage 24 V AC/DC 50 to 60 Hz DC and AC without galvanic isolation to measuring circuit 2-step or 1-step control Tripping delay 0.5 to 10 s 1 change-over contact screw terminal Successor product for 3UG3501-1AC20

<b>Product brand name</b>	SIRIUS
<b>Product designation</b>	Level monitoring relay with analog setting
<b>Product type designation</b>	3UG4
<b>Manufacturer's article number</b>	
<ul style="list-style-type: none"> <li>• of the optional sensor</li> </ul>	2-pole and 3-pole sensors 3UG3207
<b>General technical data</b>	
<b>Product function</b>	Monitoring relay for level monitoring
<b>Display version LED</b>	Yes
<b>Apparent power consumption</b>	
<ul style="list-style-type: none"> <li>• at DC                             <ul style="list-style-type: none"> <li>— at 24 V maximum</li> </ul> </li> <li>• at AC                             <ul style="list-style-type: none"> <li>— at 24 V maximum</li> </ul> </li> </ul>	2 V·A
	2 V·A
<b>Insulation voltage</b>	
<ul style="list-style-type: none"> <li>• for overvoltage category III according to IEC 60664                             <ul style="list-style-type: none"> <li>— with degree of pollution 3 rated value</li> </ul> </li> </ul>	300 V
<b>Degree of pollution</b>	3
<ul style="list-style-type: none"> <li>• Type of voltage of the control supply voltage</li> </ul>	AC/DC

<b>Surge voltage resistance rated value</b>	4 kV
<b>Protection class IP</b>	IP20
<b>Shock resistance</b>	
• acc. to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
<b>Vibration resistance</b>	
• acc. to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>Mechanical service life (switching cycles)</b>	
• typical	10 000 000
<b>Electrical endurance (switching cycles)</b>	
• at AC-15 at 230 V typical	100 000
<b>Reference code acc. to DIN EN 81346-2</b>	K
<b>Relative repeat accuracy</b>	1 %

### Product Function

<b>Product function</b>	
• outlet monitoring adjustable	Yes
• Adjustable response sensitivity	Yes
• inlet monitoring adjustable	Yes
• External reset	Yes

### Control circuit/ Control

<b>Control supply voltage at AC</b>	
• at 50 Hz rated value	24 ... 24 V
• at 60 Hz rated value	24 ... 24 V
<b>Control supply voltage at DC</b>	
• rated value	24 ... 24 V
<b>Operating range factor control supply voltage rated value at DC</b>	
• initial value	0.85
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	0.85
• Full-scale value	1.1
<b>Operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• Full-scale value	1.1

### Measuring circuit

<b>Adjustable response delay time</b>	
• when starting	0.5 ... 10 s
• with lower or upper limit violation	0.5 ... 10 s
<b>Buffering time in the event of power failure minimum</b>	200 ms

physical measuring principle	conductive
<b>Precision</b>	
Relative metering precision	20 %
Temperature drift per °C	1 %/°C
<b>Auxiliary circuit</b>	
<b>Number of NC contacts</b>	
• delayed switching	0
<b>Number of NO contacts</b>	
• delayed switching	0
<b>Number of CO contacts</b>	
• delayed switching	1
<b>Operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>Outputs</b>	
<b>Ampacity of the output relay at AC-15</b>	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A
<b>Ampacity of the output relay at DC-13</b>	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
<b>Operating current at 17 V minimum</b>	5 mA
<b>Continuous current of the DIAZED fuse link of the output relay</b>	4 A
<b>Electromagnetic compatibility</b>	
<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	6 kV contact discharge / 8 kV air discharge
<b>Galvanic isolation</b>	
<b>Galvanic isolation</b>	
• between entrance and outlet	Yes
• between the outputs	No
<b>Connections/ Terminals</b>	
<b>Product function</b>	
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	screw-type terminals

<b>Type of connectable conductor cross-sections</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• at AWG conductors solid</li> <li>• at AWG conductors stranded</li> </ul>	<p>1x (0.5 ... 4.0 mm<sup>2</sup>), 2x (0.5 ... 2.5 mm<sup>2</sup>)</p> <p>1x (0.5 ... 2.5 mm<sup>2</sup>), 2x (0.5 ... 1.5 mm<sup>2</sup>)</p> <p>2x (20 ... 14)</p> <p>2x (20 ... 14)</p>
<b>Connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> </ul>	<p>0.5 ... 4 mm<sup>2</sup></p> <p>0.5 ... 2.5 mm<sup>2</sup></p>
<b>AWG number as coded connectable conductor cross section</b>	
<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	<p>20 ... 14</p> <p>20 ... 14</p>
<b>Tightening torque</b>	
<ul style="list-style-type: none"> <li>• with screw-type terminals</li> </ul>	0.8 ... 1.2 N·m

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	screw and snap-on mounting
<b>Height</b>	92 mm
<b>Width</b>	22.5 mm
<b>Depth</b>	91 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	<p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p> <p>0 mm</p>

### Ambient conditions






<b>Installation altitude at height above sea level</b>	
--	--

- maximum 2 000 m

#### Ambient temperature

- during operation -25 ... +60 °C
- during storage -40 ... +80 °C
- during transport -40 ... +80 °C

#### Certificates/ approvals

General Product Approval		EMC	Declaration of Conformity	
 CCC	 UL	 EAC	 RCM	 EG-Konf.

[Miscellaneous](#)

Test Certificates	Marine / Shipping	other	Railway
<a href="#">Special Test Certificate</a>	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>	<a href="#">Vibration and Shock</a>
	 LRS	 DNVGL.COM/AF	

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4501-1AA30>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4501-1AA30>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3UG4501-1AA30>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3UG4501-1AA30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4501-1AA30&lang=en)

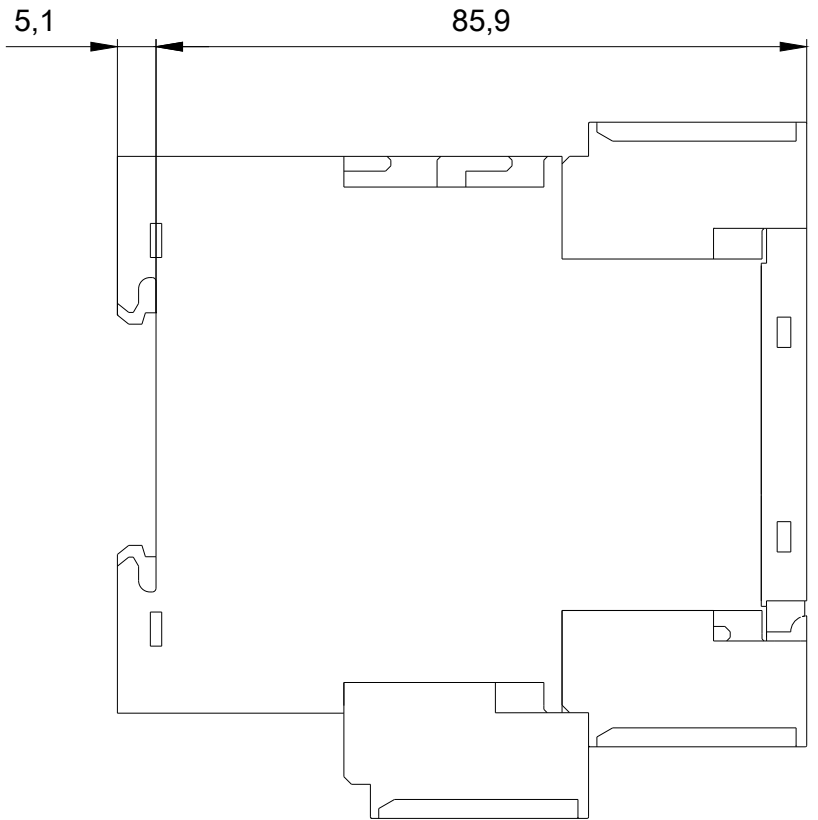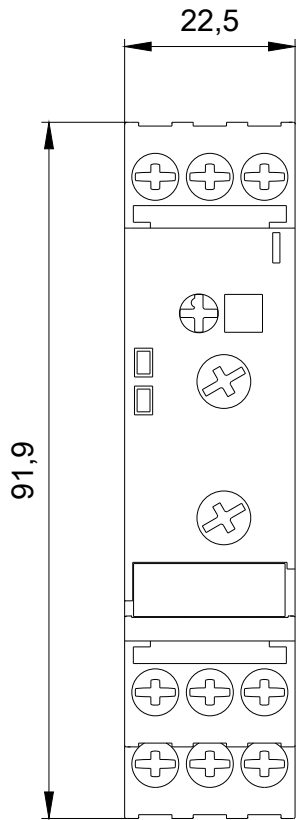

last modified:

04/09/2020