

MET-60-T

Description:

Triad's high reliability audio transformers provide the durability and precision required in today's demanding designs. These transformers are available for a wide variety of applications.

Electrical Specifications (@20C)

Power level (mW)	Matching Impedance		Max. Ma DC Unbalance in Primary	DC Resistance (Ω)		Overall Turns Ratio
	Primary	Secondary		Primary	Secondary	
50	135 Ω	135 Ω CT	10.0	10.5	10.8	1.0:1.0

Operating Temperature: -20C° to 85C°

Storage Temperature: -55C° to 105C°

Frequency Response: \pm 2.0 dB, at 300 Hz to 100K Hz (1 KHz Ref.)


Longitudinal Balance: 60dB Min @ 1 KHz

***Max power at 300Hz**

Pri-Sec Hipot test (Pri-Sec): 1500 VRMS for 60 sec.



Construction:

Plug-in terminals are precision spaced to provide fixed mounting centers. Epoxy molded case includes a .020" recess for ease of solder inspection. Leads are Tin plated 0.020" in diameter.

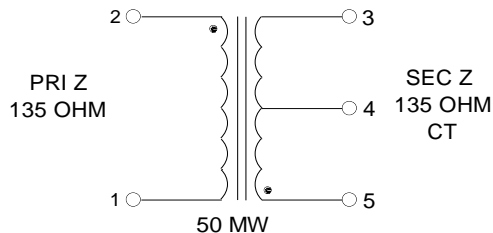

RoHS Compliance: As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see <http://www.triadmagnetics.com/faq.html>

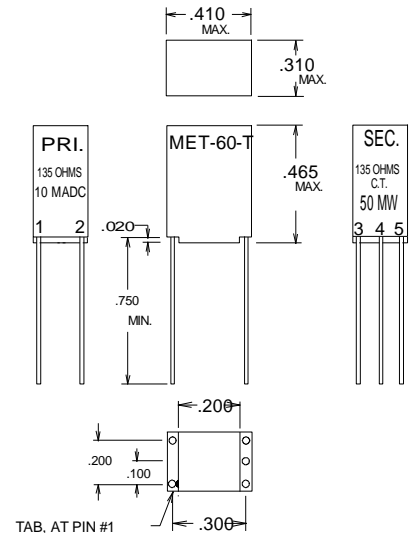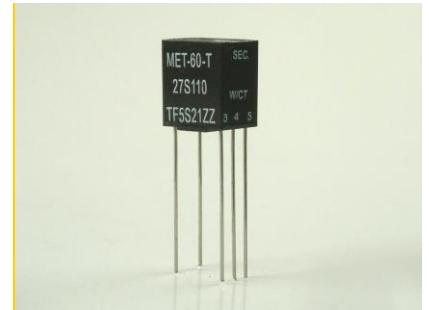

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Triad Magnetics:](#)

[MET-60-T](#)