

Search Results

- Evaluate
  - FAQ's
- Design a Solution
  - Part Drawings
  - PDF-Type F -Narr ..
  - DXF-Type F -Narr ..
  - DWG-Type F -Narr ..
- How to Buy
  - Bill of Material
  - Favorite Products List
  - Locate Distributor


Home > Products Overview > Search Results >

Current refinements (click  to remove) Search Tips  Within Results

Text Search: 'F3X3WH6-A'

Your search criteria matched only one product, shown below

**F3X3WH6-A**

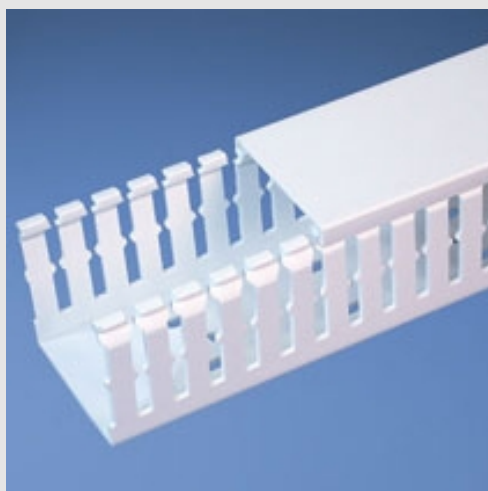

Choose from 29 sizes of *PANDUIT*® Type F Wiring Duct from 0.5" x 0.5" up to 4.0" x 5.0". Used for general purpose control panel wiring in communication closets. Ideal for use with high-density terminal blocks. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

**Specifications**

- Made of lead-free PVC
- UL Recognized continuous use temperature: 122°F (50°C)
- UL94 Flammability Rating of V-0
- Conforms with NFPA 79-2002 section 14.3.1 requirement for flame retardant material
- Available in Light Gray and White
- Provided with mounting holes

**Features and Benefits**

- *PANDUIT*® exclusive rounded edges protects hands and wiring/cabling from abrasion
- Non-slip cover stays in place during shipment, vibration and when in a vertical orientation, eliminating rework
- Flush cover design holds 10-12% more wires than traditional duct designs
- Double scoreline allows quick modification for larger cabling bundles saving installation time leading to a lower installed cost
- Specially formulated lead-free material eliminates health concerns associated with PVC that contains lead
- Double restricted slot design retains wire in slot for fast, easy wire installation or removal

Base and cover sold separately.

Part Number	F3X3WH6-A
RoHS Compliancy Status	Compliant
Part Description	Narrow finger, slotted wiring duct
Material	PVC
Color	White
CSA Certified	Yes
Adhesive Mounting Tape	Yes
CE Compliant	Yes
Duct Size W x H (In.)	3.25 x 3.12
Duct Size W x H (mm)	82.6 x 79.2
Mounting Method	Standard Mounting Holes with Adhesive
Pricing Description	Slotted Duct, PVC, 3"X3"X6" Adh., White
Slot Width (In.)	0.2
Slot Width (mm)	5
Cover Part Number	C3WH6
Min. Order UOM	FT
Min. Order Qty.	6
BOM Qty. (# of Pkgs.)	<input type="text" value="0"/>
Add to Favorite Product List	<input type="checkbox"/>

Please [register](#) to utilize the 'Bill of Materials', 'Submit Quotes' and 'Favorite Product List' features.