

Features:


- Coating meets UL 94V-0
- Designed for constant current to provide overload protection
- Consistent performance and reliability
- Cut and formed product is available on select sizes, contact factory for details
- RoHS compliant, lead free and halogen free



Electrical Specifications					
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Resistance Temperature Coefficient	Ohmic Range (Ω) and Tolerance
					5%
FRN16	0.166 W	150 V	200 V	±350 ppm/°C	0.56 - 10 K
FRN14	0.25 W	200 V	300 V	±350 ppm/°C	0.22 - 10 K
FRN12	0.5 W	250 V	400 V	±350 ppm/°C	0.47 - 10 K
FRN1	1 W	300 V	600 V	±350 ppm/°C	0.47 - 10 K
FRN2	2 W	300 V	600 V	±350 ppm/°C	1 - 3 K

(1) Lesser of \sqrt{PR} or maximum working voltage

Mechanical Specifications

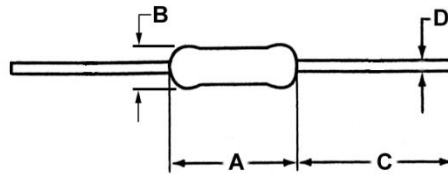


Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
FRN16	0.126 +0.008 / -0	0.073 ± 0.006	1.102 ± 0.118	0.018 ± 0.002	inches
	3.20 +0.20 / -0	1.85 ± 0.15	28.00 ± 3.00	0.45 ± 0.05	mm
FRN14	0.236 ± 0.020	0.091 ± 0.008	1.102 ± 0.118	0.022 ± 0.002	inches
	6.00 ± 0.50	2.30 ± 0.20	28.00 ± 3.00	0.55 ± 0.05	mm
FRN12	0.354 ± 0.039	0.118 ± 0.020	1.102 ± 0.118	0.028 ± 0.002	inches
	9.00 ± 1.00	3.00 ± 0.50	28.00 ± 3.00	0.70 ± 0.05	mm
FRN1	0.433 ± 0.039	0.157 ± 0.020	1.102 ± 0.118	0.031 ± 0.002	inches
	11.00 ± 1.00	4.00 ± 0.50	28.00 ± 3.00	0.80 ± 0.05	mm
FRN2	0.591 ± 0.039	0.217 ± 0.039	1.378 ± 0.118	0.031 ± 0.002	inches
	15.00 ± 1.00	5.50 ± 1.00	35.00 ± 3.00	0.80 ± 0.05	mm

Performance Characteristics

Test	Test Result
Moisture Resistance	±5%
Thermal Shock	±1%
Load Life @ 70 °C - 1000 hours	±5%
Resistance to Soldering Heat	±1%
Short Time Overload	±2%

Operating Temperature Range: -40 °C to +155 °C

Fusing Curves

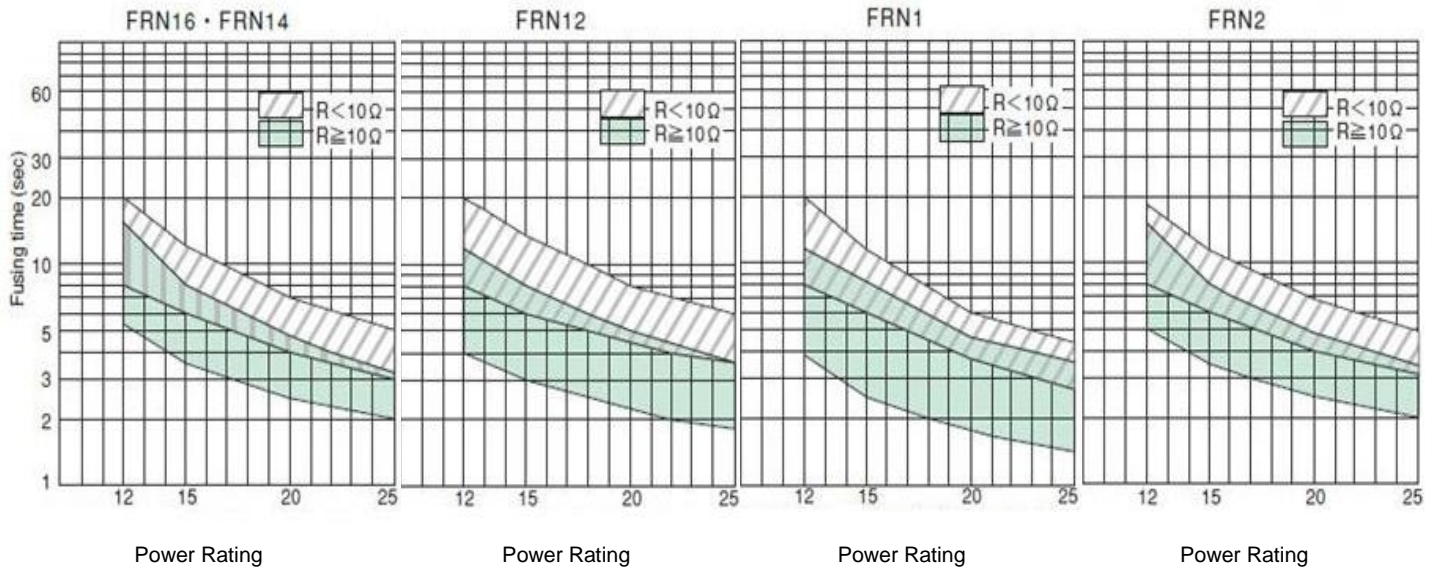

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union’s directive regarding “Restrictions on Hazardous Substances” (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
FRN	Axial Leaded Fusing Resistor	Axial	YES	99.3/0.7 Sn/Cu	Apr-05	05/14

“Conflict Metals” Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the “conflict region” of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to “REACH”

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, “The Registration, Evaluation, Authorization and Restriction of Chemicals”, otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

1	2	3	4	5	6	7	8	9	10	11
F	R	N	1	2	J	T	4	R	7	0

Product Series		Power Rating		Tolerance			Packaging				Resistance Value
Code	Description	Code	Power	Code	Tol	Value	Code	Description	Product Code	Quantity	
FRN	Fusing Metal Film	16	0.166 W	J	5%	E24	T	Tape and Reel	FRN16, FRN14	5000	Four characters with the multiplier used as the decimal holder. 0.47 ohm = R470 10 Kohm = 10K0
		14	0.25 W						FRN12, FRN1	2500	
		12	0.5 W						FRN2	1000	
		1	1 W				A	Ammo	FRN16	5000	
		2	2 W						FRN14, FRN12	2000	
									FRN1	1000	
									FRN2	500	
							B	Bulk	FRN16	2000	
									FRN14, FRN12	1000	
									FRN1, FRN2	1000	