


### specifications

The wiring duct cutter shall smoothly cut slotted plastic wiring duct and duct cover leaving a square, clean edge. The tool shall cut precisely and evenly in a single stroke with minimal force eliminating uneven cuts or burrs. The adjustable stop with integrated measuring scale shall provide precision adjustment up to 39.4 inches (1000mm) to guarantee both wiring duct and cover are cut to exact lengths.

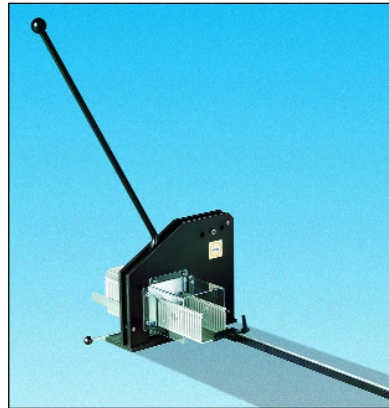

### technical information

<b>Material:</b>	Steel
<b>Weight:</b>	44 lbs./20 kg
<b>Color:</b>	Black
<b>Compatibility:</b>	Cuts PANDUCT® Slotted Wiring Duct from .5" x .5" to 4" x 5" (12mm x 12mm to 100mm x 125mm); covers to 4" (100mm)

### key features and benefits

<b>Manual hand operation</b>	No chips, dust, or noise when compared to power cutting tools
<b>Precision cutting blade</b>	No burrs or uneven cuts
<b>Integrated measuring scale</b>	Reduces waste due to inaccurate cuts
<b>Adjustable cut-length stop</b>	Accurate measurement and consistent cutting of lengths up to 39.4" (1000mm)
<b>Safety cover</b>	Protects operator from inadvertent contact with blade

### applications

The PANDUCT® BDCT is a single stroke wiring duct cutter designed for use in panel shops to smoothly cut slotted plastic wiring duct and cover with minimal effort. The cutter's

powerful lever action cuts precisely and evenly leaving square, clean edges. This solution provides accurate cuts to eliminate time-consuming cutting by hand.

### PANDUCT® Wiring Duct Cutting Tool

**Bench mount cutting tool:** BDCT

### Wiring Duct Bases (smallest to largest size)

<b>Type G</b>	G.5X.5**6 to G4X5**6
<b>Type F</b>	F.5X.5**6 to F4X5**6
<b>Type H</b>	H1.5X2**6 to H4X4**6
<b>Type MC</b>	MC25X25**2 to MC100X100**2
<b>Type NE</b>	NE.5X.5WH6 to NE4X5WH6
<b>Type NNC</b>	NNC25X25**2 to NNC100X100**2
<b>Type FL</b>	FL12X12LG-A to FL50X50LG-A

### Covers


<b>For Type G, Type F</b>	C.5**6 to C4**6
<b>For Type H</b>	HC1.5**6 to HC4**6
<b>For Type NE</b>	NC.5WH6 to NC4WH6
<b>For Type NNC</b>	NC25**2 to NC100**2

### Installation Tools


<b>Duct cutting tool:</b>	DCT
<b>Duct notching tool (hand-held tool):</b>	DNT-100
<b>Duct finger cutting tool:</b>	DFCT
<b>Nylon rivet tool:</b>	TNR
<b>Nylon rivets:</b>	NR1-C NR1-M

\*\* = Color code of LG (Light Gray), WH (White), BL (Black), IB (Intrinsic Blue)

# PANDUIT® Bench Mount Wiring Duct Cutting Tool

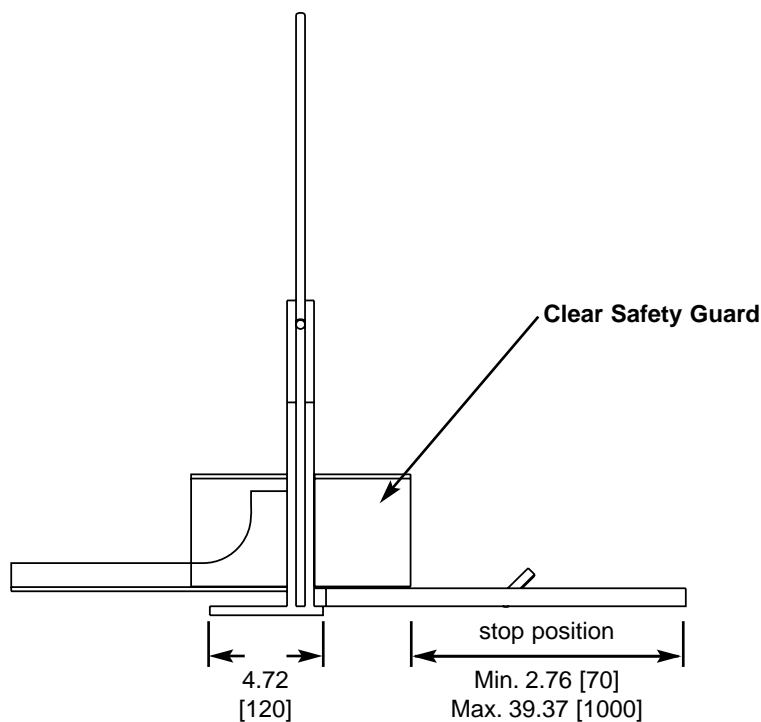

**BDCT**  
Front View

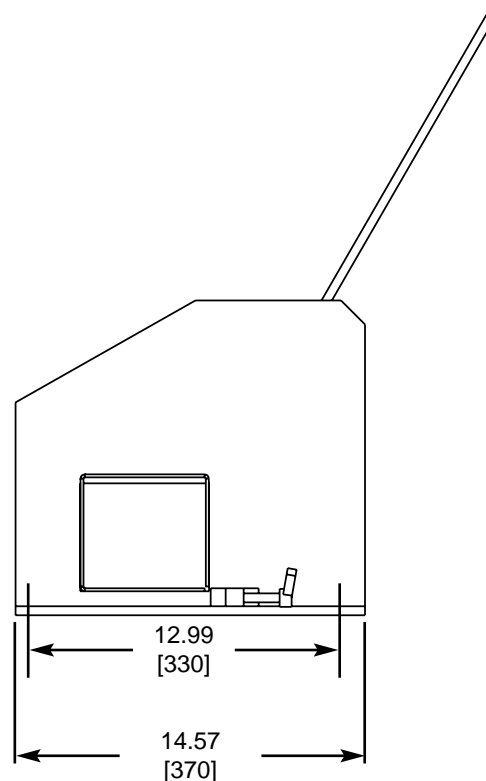

**BDCT**  
Side View with  
Mounting Dimensions

Dimensions are in inches [Dimensions in brackets are metric]

## WORLDWIDE SUBSIDIARIES AND SALES OFFICES

**PANDUIT CANADA**  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

**PANDUIT EUROPE LTD.**  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

**PANDUIT SINGAPORE PTE. LTD.**  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

**PANDUIT JAPAN**  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.3767.7011

**PANDUIT LATIN AMERICA**  
Jalisco, Mexico  
cs-la@panduit.com  
Phone: 52.333.777.6000

**PANDUIT AUSTRALIA PTY. LTD.**  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of *PANDUIT* product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)



For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800-777-3300 and reference WDSP01

©2007 *PANDUIT* Corp.  
ALL RIGHTS RESERVED.  
Printed in the U.S.A.

**WW-WDSP01**  
8/2007