


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: PBT,UL94V-0
 Color: Natural(White)

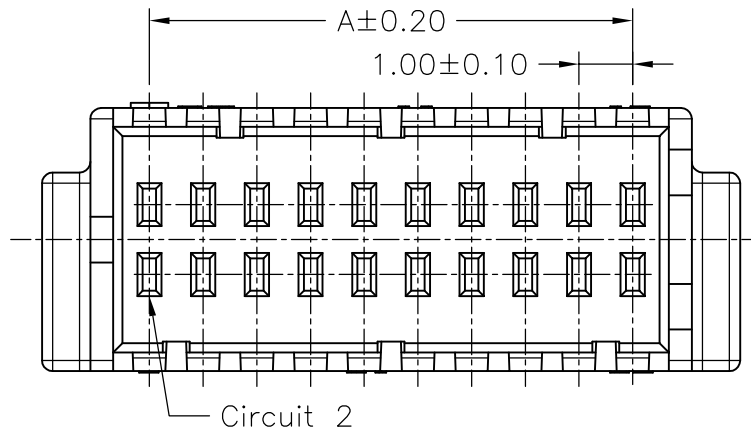

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1001H-2X06P	5.00	9.00
A1001H-2X08P	7.00	11.00
A1001H-2X09P	8.00	12.00
A1001H-2X10P	9.00	13.00
A1001H-2X15P	14.00	18.00
A1001H-2X20P	19.00	23.00
A1001H-2X25P	24.00	28.00

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
				DRAWN BY	APPROVED BY		1.00mm PITCH HOUSING-DUAL ROW
				董正一	董正一		
B3	REVISE	2008.10.24	2003.04.15	2003.04.15			
B2	REVISE	2008.09.12	GENERAL TOLERANCE				
B1	REVISE	2007.06.14	X. X±0.25	ANGLE±			
B0	NEW RELEASE	2006.04.14	X. XX±0.15				
REV.	DESCRIPTION	DATE	X. XXX±0.05			DRAW NO. :	REV.
						A1001H-2XNP	B3