


Top View
(reference only)

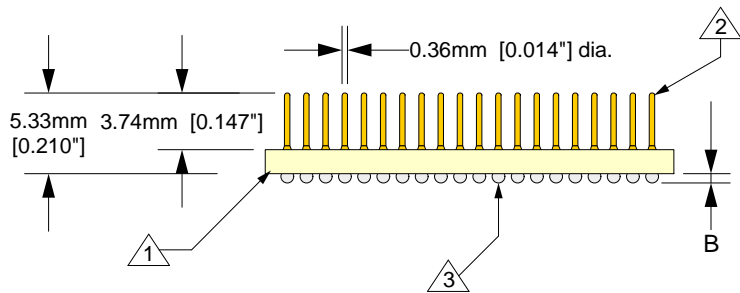

Side View
(reference only)


Note: SMT foot is independent of actual BGA package thickness.

- 1 Substrate: 1.59mm \pm 0.18mm [0.0625" \pm 0.007"] FR4/G10 or equivalent high temp material. Non-clad.
- 2 Pins: material- Brass Alloy 360 1/2 hard; finish- 0.25 μ m [10 μ] Au over 1.27 μ m [50 μ] Ni (min.).
- 3 Balls: Eutectic 63/37 SnPb. Thermally isolated from terminal pins

Description: BGA Emulator Foot (SM base).

280 position terminal pins (MGA, Mini-grid Array) to solder balls. Surface mounts to target BGA land pattern.


Package Code: BGA280A

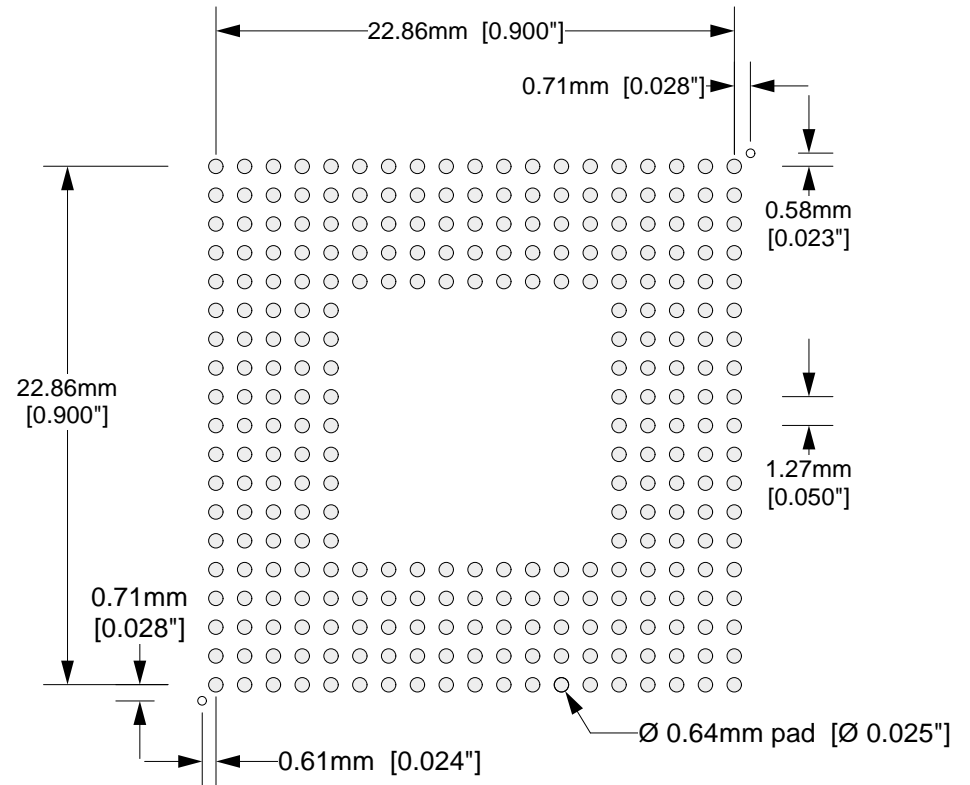

Top View: Recommended PCB Layout
Scale: 3:1

Pin Count	280
Array Size	19 x 19
Pitch	1.27mm[0.050"]
Perimeter size (XxY)	25.0mm[0.984"] x 25.0mm[0.984"]
MGA Location (CxD)	1.07mm[0.042"] x 1.07mm[0.042"]
Ball Thickness (B)	0.61mm[0.024"]

Tolerances: diameters \pm 0.03mm [\pm 0.001"], PCB perimeters \pm 0.13mm [\pm 0.005"], PCB thicknesses \pm 0.18mm [\pm 0.007"], pitches (from true position) \pm 0.08mm [\pm 0.003"], all other tolerances \pm 0.13mm [\pm 0.005"] unless stated otherwise. Materials and specifications are subject to change without notice.

	SF-BGA280A-B-11 Drawing		Status: Released	Scale -	Rev: A
	© 2004 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com		Drawing: B. Roux		Date:10/21/04
			File: SF-BGA280A-B-11 Dwg.mcd		Modified: