


WIRE RANGE	IL E13288 IL Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 22-18\* APPROX AS SHOWN  
22-16 TERMINALS ARE STAMPED 22-18 IN  
ACCORDANCE WITH MILITARY SPECIFICATION  
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

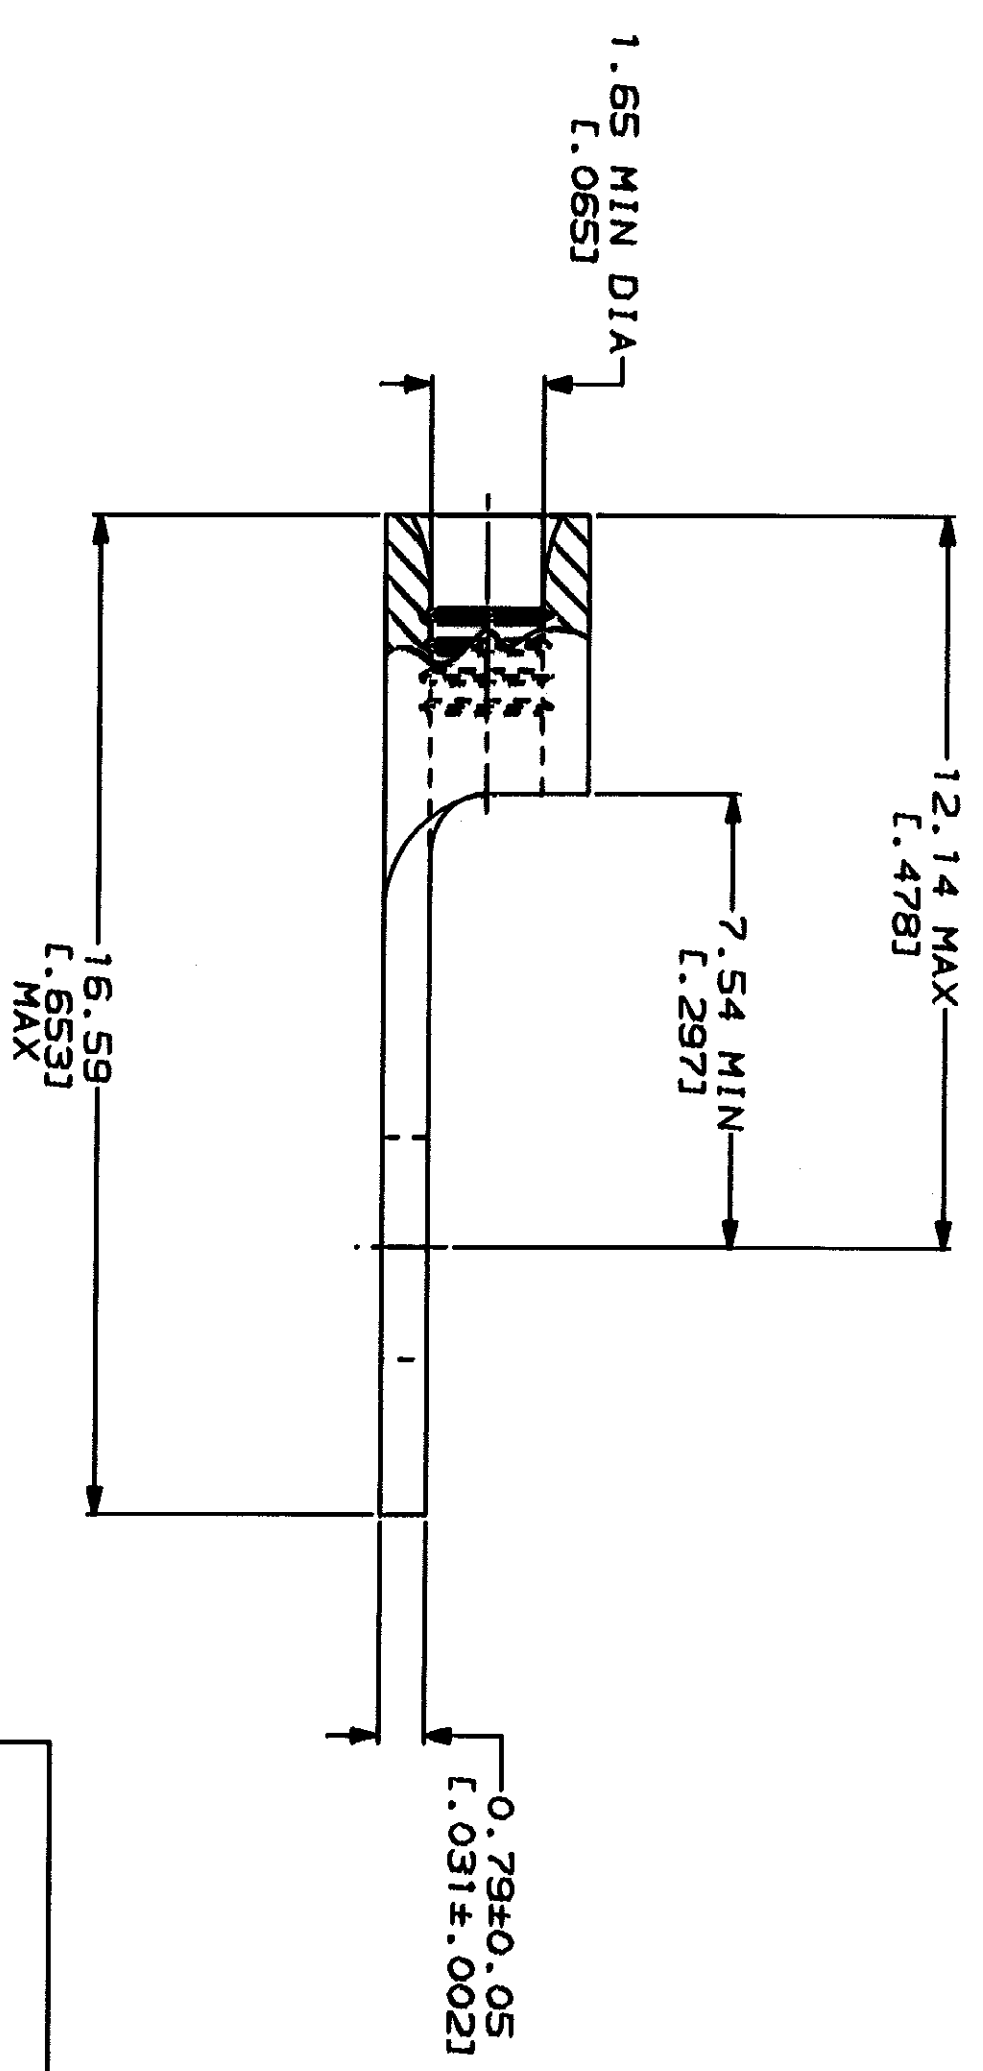

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS  
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION  
1-800-722-1111

FOR ORDER ENTRY  
1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX

VOLTAGE RATING: NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm<sup>2</sup> [509-3,260] CIR MILS STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN - FINISHES - TOLERANCES ON 1 2 PL DEC ± 3 PL DEC ± ANGLES MATERIAL

FINISH: TIN PLATE  
0.00254L. 0001001 MIN THK PER MIL-T-10727

DR 2-3-93 TA BRINKMAN	NAME
CHK 2-3-93 DA PATTERSON	AMP Incorporated Harrisburg, PA 17105-3509
APPD 2-3-93 DE MILLER	TERMINAL, RING TONGUE, BUDGET
APPD 2-3-93 JL HECKLEY	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	

SIZE	CAGE CODE	DRAWING NO
G	00779	G-32822
SCALE	8:1	
PART NO	32822	
SHEET	1 OF 1	