

# F female Header 2.54mm



ROHS







## Female Header 2.54mm H=8.5mm SMT Right Angle Type

### Specifications

Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C


### Material

Insulator: Polyester, UL 94V-0  
 ©Standard: Nylon 6T  
 Terminal: Copper Alloy  
 Plating: Gold Plated

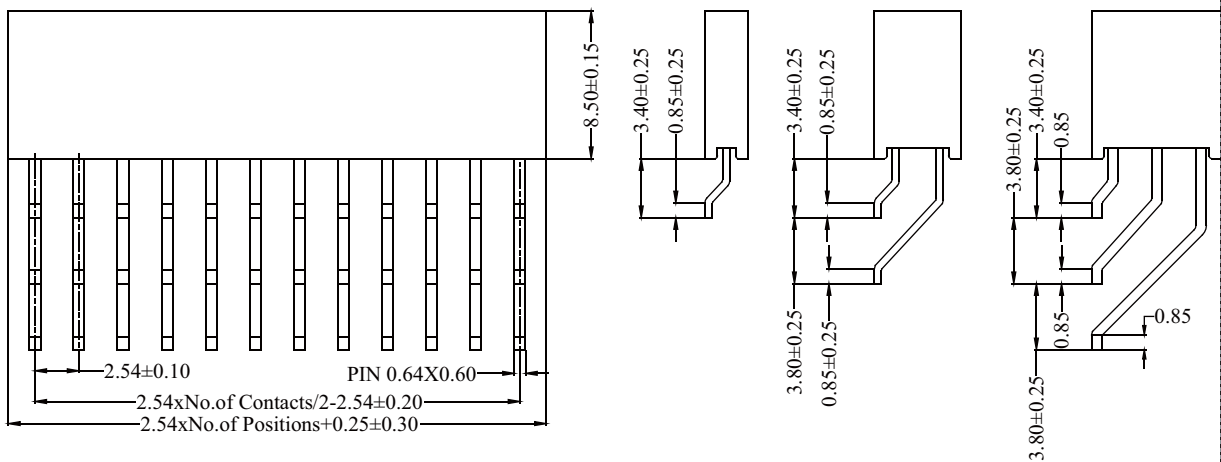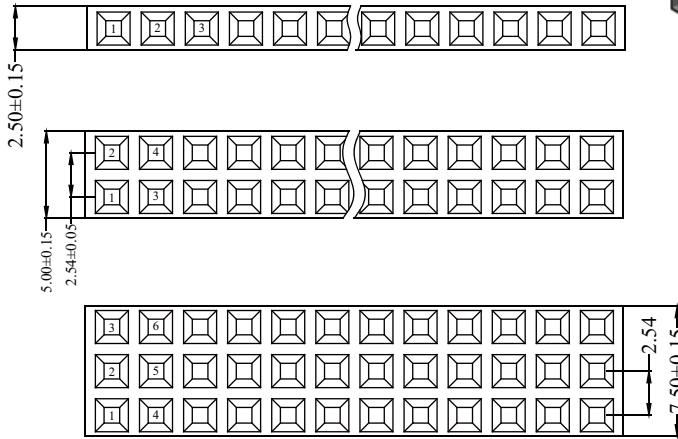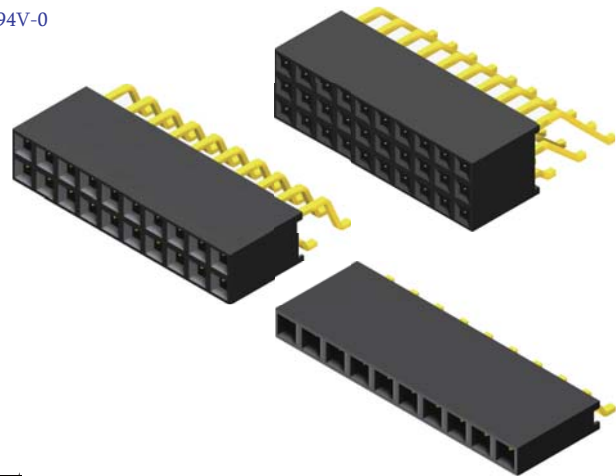

Recommended P.C.B Layout (TOP Side)  
 (PCB BOARD TOLERANCE±0.05)

## ORDER INFORMATION

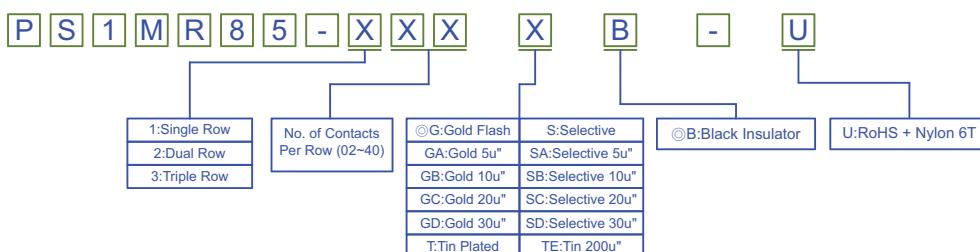

©: Standard Recommended