

REV.	SPECIFICATION	ECN NO.	APPD.









Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.
 Contacts: Copper Alloy 0.64mm(0.25") Square Wire Pins

Electrical Characteristics:

Current Rating: 2.5 AMP.
 Voltage Rating: 250V AC/DC.
 Dielectric Withstanding Voltage: AC 600V for 1 minute.
 Insulator Resistance: 1000MΩ min. at DC 500V
 Contact Resistance: 20mΩ max. at DC 100mA.
 Operating Temperature: -25°C~+85°C.

***RoHS Compliant**

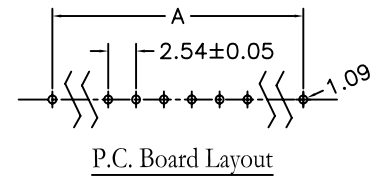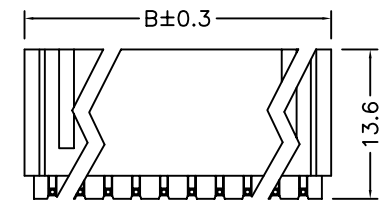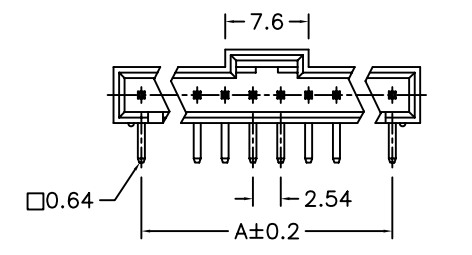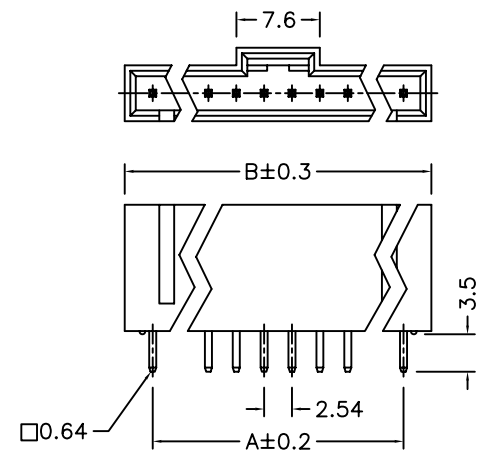

4077- xx G xx x B
 Series Position G: Gold Plated 00: G/F 10: 10μ" 15: 15μ" 30: 30μ"
 S: Straight R: Right Angle B: Bulk Package

Dimension	2 Thru 18
Position	
A	2.54 X No. of Positions - 2.54
B	2.54 X No. of Positions + 2.54

Tolerances	Dwg. No.	4077D01002	Title:	4077 Series Wafer 2.54mm
x = ±0.50	Projection			
.x = ±0.25	Unit	mm	Scale	1:1
.xx = ±0.15	Drawn By	Peggy12/24'12		

①704

OUPIIN ELECTRONIC(KUNSHAN) CO., LTD.			
P/N: 4077-xxGxxxB			
SHEET	1/1	Ver.No.	A6