


Ultra Fast Recovery Module

UFT40130 — UFT40150

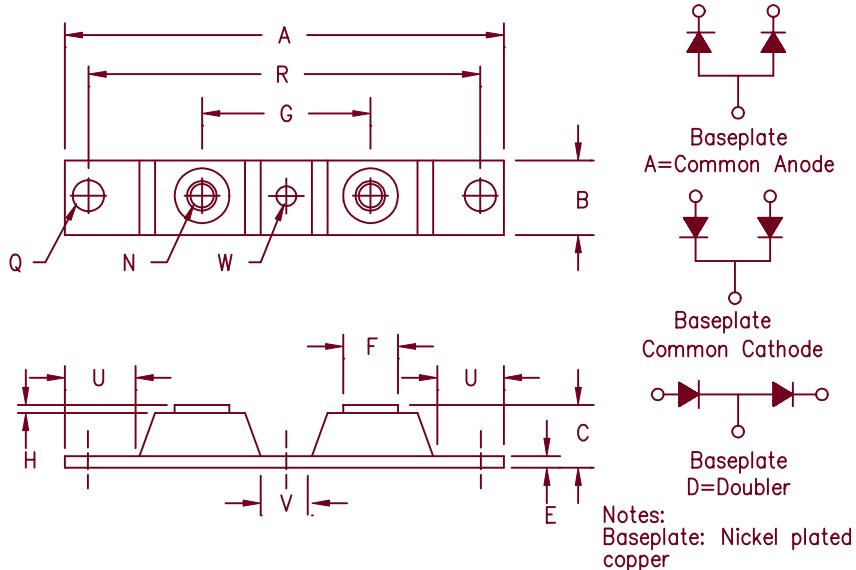

Dim.		Inches	Millimeters			
		Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20		
B	0.700	0.800	17.78	20.32		
C	---	0.630	---	16.00		
E	0.120	0.130	3.05	3.30		
F	0.490	0.510	12.45	12.95		
G	1.375	BSC	34.92	BSC		
H	0.010	---	0.25	---		
N	---	---	---	---		1/4-20
Q	0.275	0.290	6.99	7.37		Dia.
R	3.150	BSC	80.01	BSC		
U	0.600	---	15.24	---		
V	0.312	0.340	7.92	8.64		
W	0.180	0.195	4.57	4.95		Dia.

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT40130*	300V	300V
UFT40140*	400V	400V
UFT40150*	500V	500V

*Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- 2 X 200 Amp current rating

Electrical Characteristics

Average forward current per pkg	$I_F(AV)$ 400 Amps	$T_C = 126^\circ C$, Square wave, $R_{\theta JC} = 0.12^\circ C/W$
Average forward current per leg	$I_F(AV)$ 200 Amps	$T_C = 126^\circ C$, Square wave, $R_{\theta JC} = 0.24^\circ C/W$
Maximum surge current per leg	I_{FSM} 2500 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Max peak forward voltage per leg	V_{FM} 1.25 Volts	$ I_{FM} = 200A; T_J = 25^\circ C^*$
Max peak reverse recovery time per leg	t_{rr} 110 nS	$ I_F = 1A, V_R = 30V \text{ di/dt} = 25A/\mu s$
Max peak reverse current per leg	$ I_{RM}$ 8 mA	$ V_{RRM}, T_J = 125^\circ C^*$
Max peak reverse current per leg	$ I_{RM}$ 50 μA	$ V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance per leg	C_J 500 μF	$ V_R = 10V, T_J = 25^\circ C$

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	-55°C to 175°C
Operating junction temp range	T_J	-55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.24°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.12°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole) center hole must be torqued first		8–10 inch pounds
Weight		2.8 ounces (75 grams) typical

UFT40130 — UFT40150

Figure 1
Typical Forward Characteristics – Per Leg

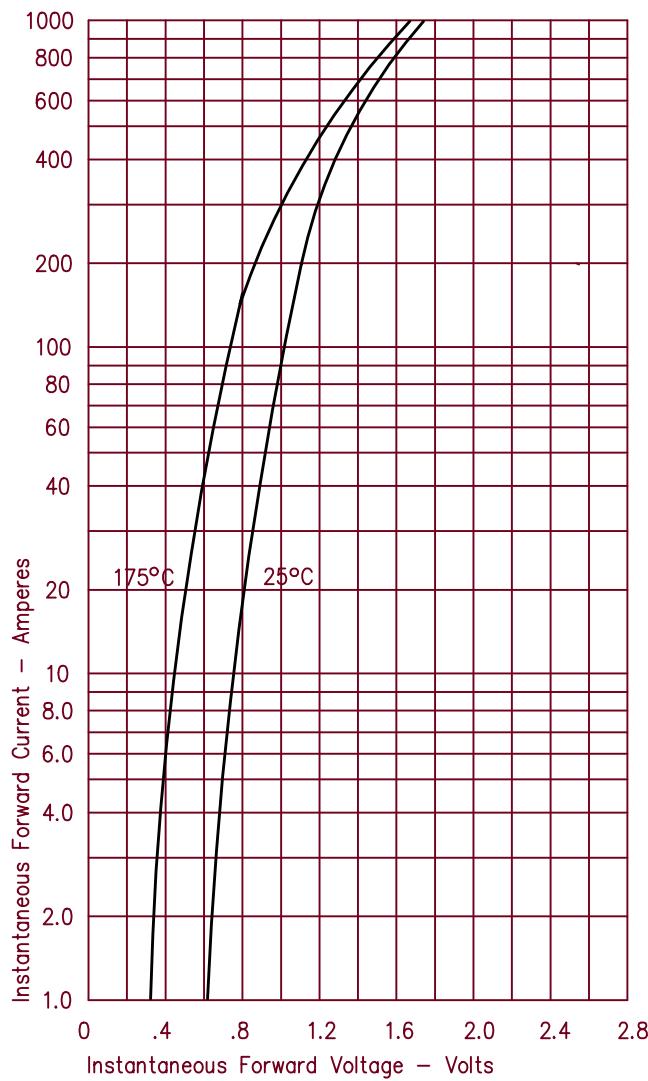


Figure 2
Typical Reverse Characteristics – Per Leg

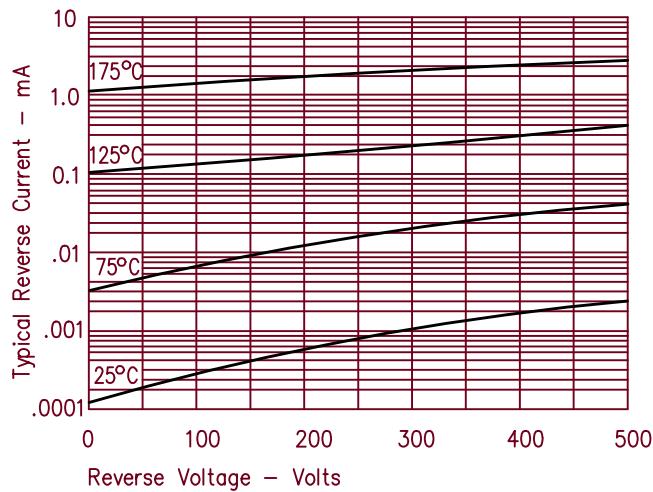


Figure 3
Typical Junction Capacitance – Per Leg

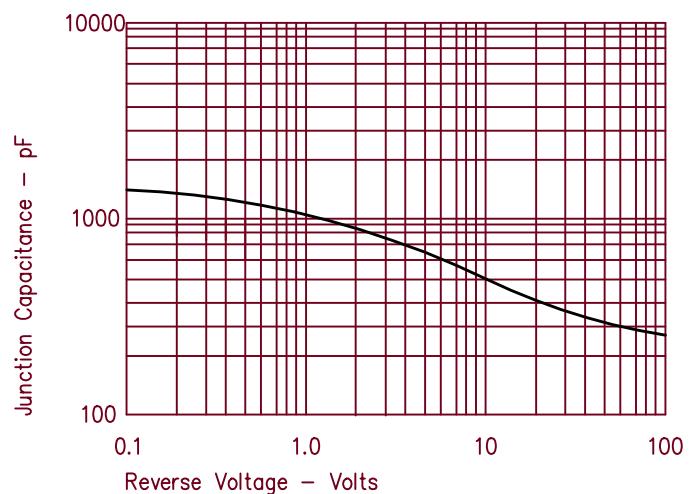


Figure 4
Forward Current Derating – Per Leg

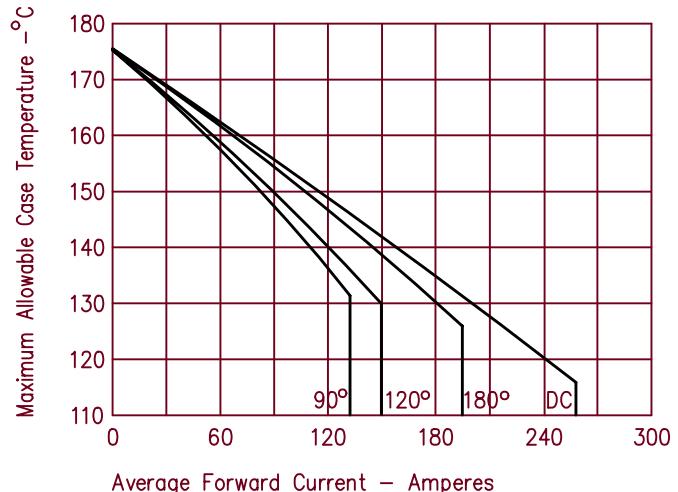


Figure 5
Maximum Forward Power Dissipation – Per Leg

