

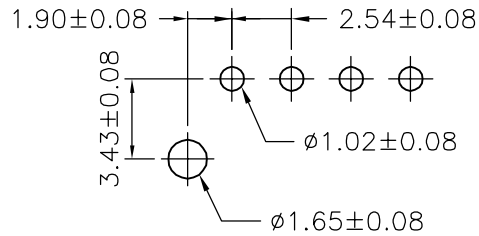
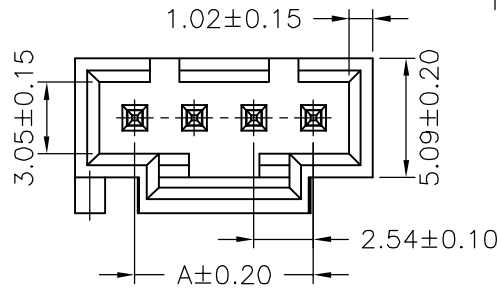
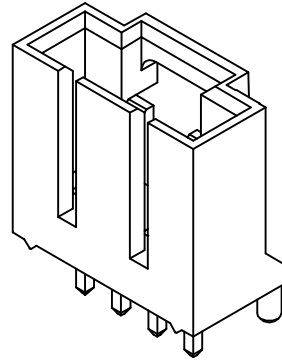


3P

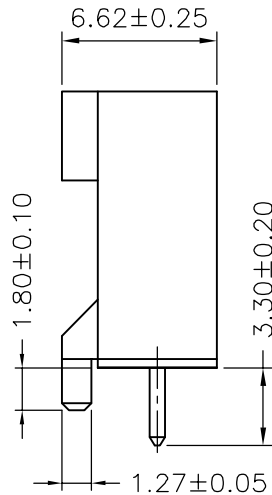

P.C.B LAYOUT

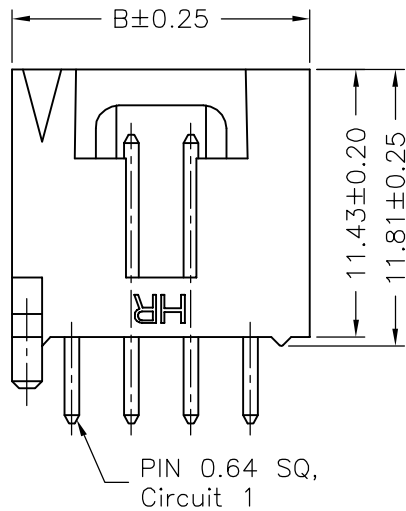

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 20m Ω Max
 Insulation Resistance: 1000M Ω Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold-flash
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2541WV-F1-03P	5.08	10.17
A2541WV-F1-04P	7.62	12.71
A2541WV-F1-05P	10.16	15.25
A2541WV-F1-06P	12.70	17.79
A2541WV-F1-07P	15.24	20.33
A2541WV-F1-08P	17.78	22.87
A2541WV-F1-09P	20.32	25.41
A2541WV-F1-10P	22.86	27.95
A2541WV-F1-11P	25.40	30.49
A2541WV-F1-12P	27.94	33.03

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
DRAWN BY		APPROVED BY		2.54mm PITCH 180° WAFER			
吴月娥		谢瑞清					
2005.09.06		2005.09.06					
GENERAL TOLERANCE				ANGLE±			
X.X±0.25		X.XX±0.15		DRW NO.: A2541WV-F1-XP			
X.XXX±0.05		X.XXX±0.05					
BO	NEW RELEASE	2006.04.10		REV. BO			
REV.	DESCRIPTION	DATE					