

### Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

#### Features

- \* Low Forward Voltage.
- \* Low Switching noise.
- \* High Current Capacity
- \* Guarantee Reverse Avalanche.
- \* Guard-Ring for Stress Protection.
- \* Low Power Loss & High efficiency.
- \* 150 Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction.
- \* Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- \* ESD: 8KV(Min.) Human-Body Model
- \* In compliance with EU RoHs 2002/95/EC directives




#### SCHOTTKY BARRIER RECTIFIERS

**30 AMPERES  
30-60 VOLTS**



**TO-3P**




#### MAXIMUM RATINGS

| Characteristic   | Symbol                          | S30D        |    |    |    |    |    | Unit |
|--|---------------------------------|-------------|----|----|----|----|----|------|
|  |                                 | 30          | 35 | 40 | 45 | 50 | 60 |      |
| Peak Repetitive Reverse Voltage<br>Working Peak Reverse Voltage<br>DC Blocking Voltage                 | $V_{RRM}$<br>$V_{RWM}$<br>$V_R$ | 30          | 35 | 40 | 45 | 50 | 60 | V    |
| RMS Reverse Voltage  | $V_{R(RMS)}$                    | 21          | 25 | 28 | 32 | 35 | 42 | V    |
| Average Rectifier Forward Current (Per diode)<br>Total Device (Rated $V_R$ ), $T_C=125$                | $I_{F(AV)}$                     | 15<br>30    |    |    |    |    |    | A    |
| Peak Repetitive Forward Current<br>(Rate $V_R$ , Square Wave, 20kHz)                                   | $I_{FM}$                        | 30          |    |    |    |    |    | A    |
| Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz) | $I_{FSM}$                       | 300         |    |    |    |    |    | A    |
| Operating and Storage Junction Temperature Range   | $T_J, T_{STG}$                  | -65 to +150 |    |    |    |    |    |      |

| DIM | MILLIMETERS |       |
|-----|-------------|-------|
|     | MIN         | MAX   |
| A   | 20.63       | 22.38 |
| B   | 15.38       | 16.20 |
| C   | 1.90        | 2.70  |
| D   | 5.10        | 6.10  |
| E   | 14.81       | 15.22 |
| F   | 11.72       | 12.84 |
| G   | 4.20        | 4.50  |
| H   | 1.82        | 2.46  |
| I   | 2.92        | 3.23  |
| J   | 0.89        | 1.53  |
| K   | 5.26        | 5.66  |
| L   | 18.50       | 21.50 |
| M   | 4.68        | 5.36  |
| N   | 2.40        | 2.80  |
| O   | 3.25        | 3.65  |
| P   | 0.55        | 0.70  |

#### ELECTRIAL CHARACTERISTICS

| Characteristic   | Symbol           | S30D |    |    |      |    |    | Unit |
|--|------------------|------|----|----|------|----|----|------|
|  |                  | 30   | 35 | 40 | 45   | 50 | 60 |      |
| Maximum Instantaneous Forward Voltage<br>( $I_F = 15$ Amp $T_C = 25$ )<br>( $I_F = 15$ Amp $T_C = 100$ )       | $V_F$            | 0.55 |    |    | 0.70 |    |    | V    |
|  |                  | 0.45 |    |    | 0.60 |    |    |      |
| Typical Thermal Resistance junction to case  | $R_{\theta j-c}$ | 2.8  |    |    |      |    |    | /w   |
| Maximum Instantaneous Reverse Current<br>( Rated DC Voltage, $T_C = 25$ )<br>( Rated DC Voltage, $T_C = 125$ ) | $I_R$            | 0.5  |    |    | 30   |    |    | mA   |



# S30D30 Thru S30D60

FIG-1 FORWARD CURRENT DERATING CURVE

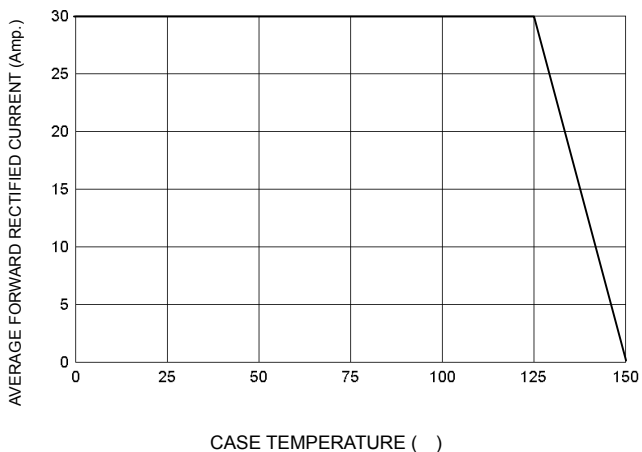


FIG-2 TYPICAL FORWARD CHARACTERISTICS

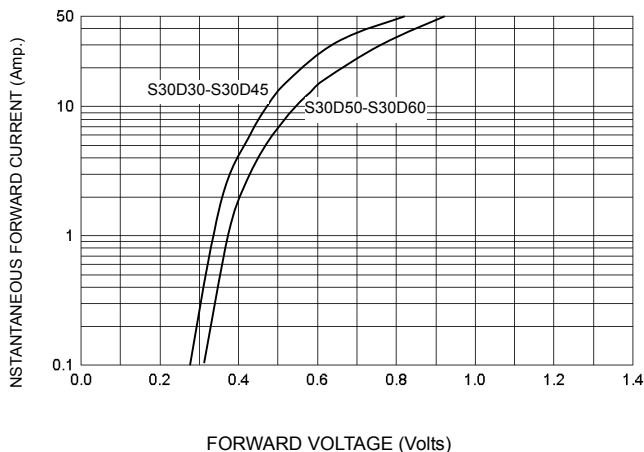


FIG-3 TYPICAL REVERSE CHARACTERISTICS

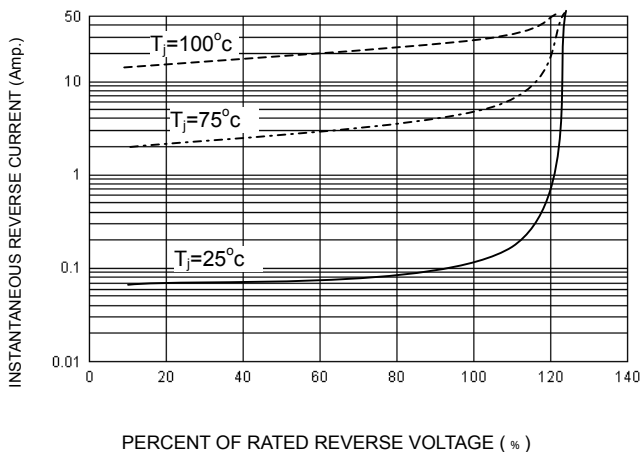


FIG-4 TYPICAL JUNCTION CAPACITANCE

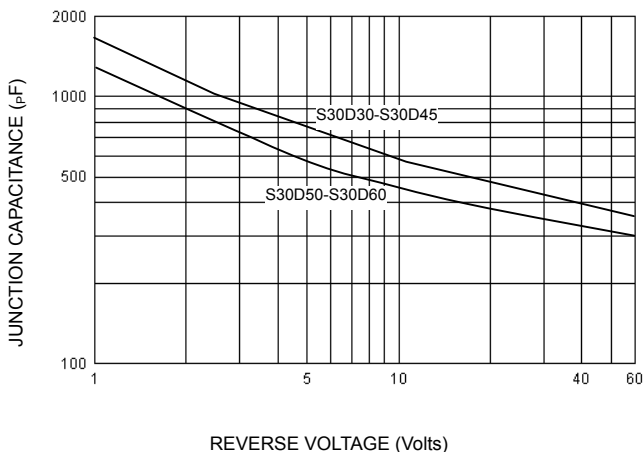


FIG-5 PEAK FORWARD SURGE CURRENT

