






Pin Header 2.0mm 1 Row H=1.5/2.0mm SMT R/A Type

Specifications

Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



Material

Insulator: Polyester, UL 94V-0
 ◎Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

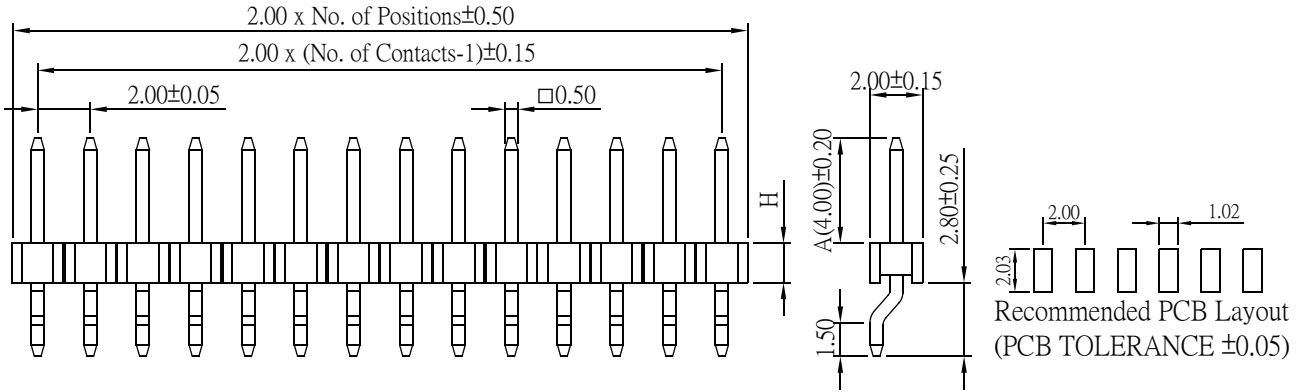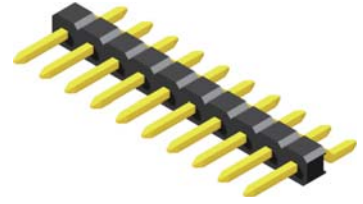


Part No.: PH2MR15/20-1XX-U

Pin Header 2.0mm 2 Row H=1.5/2.0mm SMT R/A Type

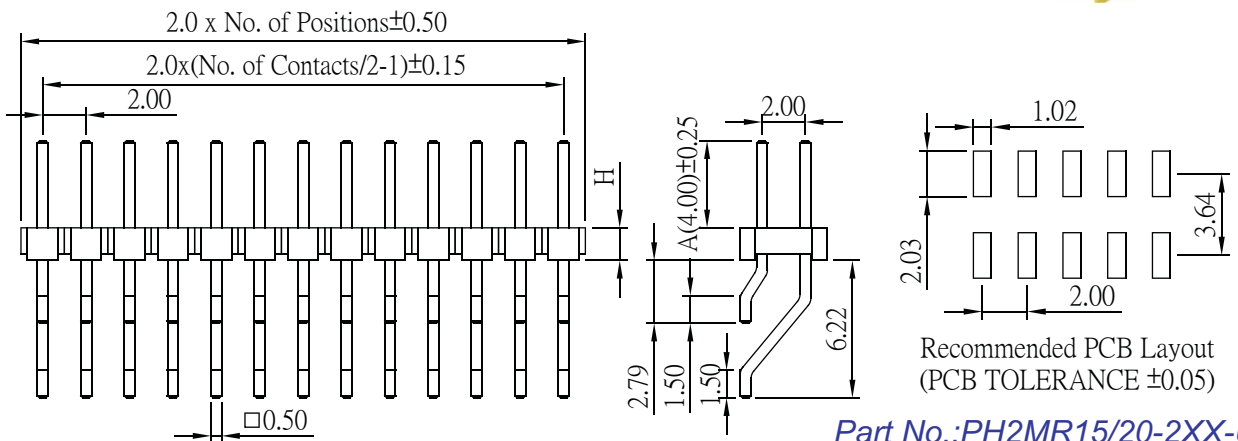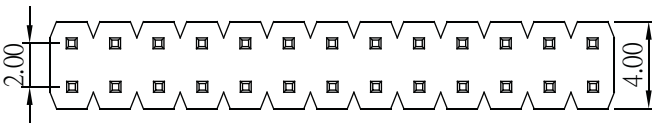

Part No.: PH2MR15/20-2XX-U

ORDER INFORMATION

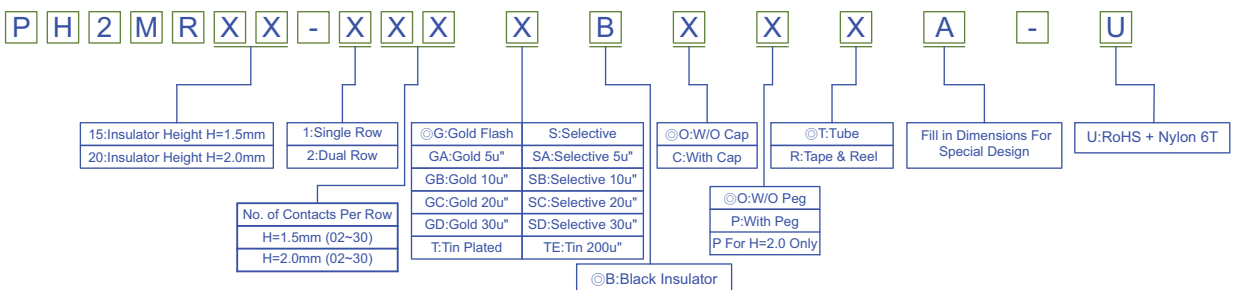

◎: Standard Recommended