


2SC4669
(TE10S4)

10A NPN

OUTLINE DIMENSIONS

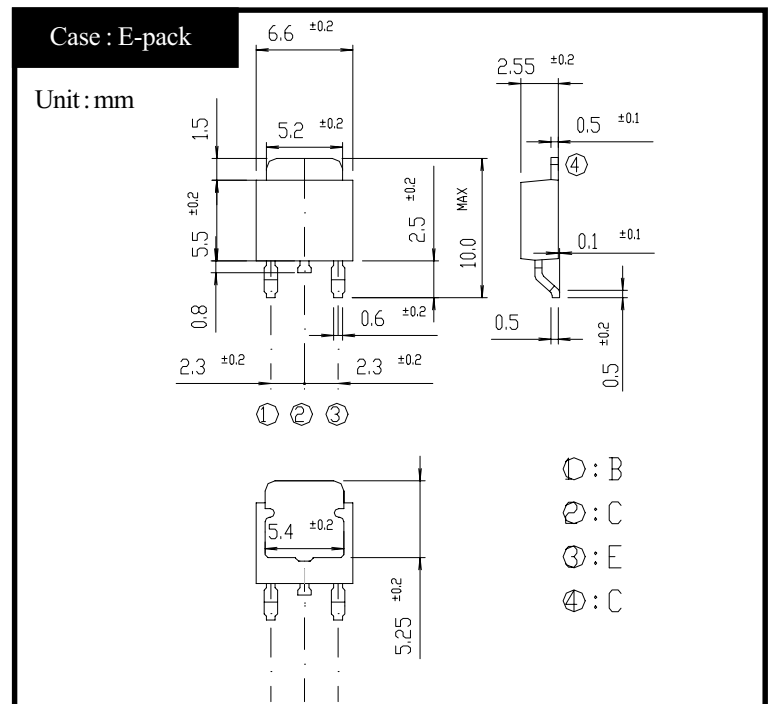

RATINGS

● Absolute Maximum Ratings


| Item | Symbol | Conditions | Ratings | Unit |
|------------------------------|-----------|--------------------------|---------|------|
| Storage Temperature | T_{stg} | | -55~150 | °C |
| Junction Temperature | T_j | | 150 | °C |
| Collector to Base Voltage | V_{CBO} | | 60 | V |
| Collector to Emitter Voltage | V_{CEO} | | 40 | V |
| Emitter to Base Voltage | V_{EBO} | | 7 | V |
| Collector Current DC | I_C | | 10 | A |
| Collector Current Peak | I_{CP} | | 20 | A |
| Base Current DC | I_B | | 1.5 | A |
| Base Current Peak | I_{BP} | | 2 | A |
| Total Transistor Dissipation | P_T | $T_c = 25^\circ\text{C}$ | 10 | W |

● Electrical Characteristics ($T_c=25^\circ\text{C}$)


| Item | Symbol | Conditions | Ratings | Unit |
|---|----------------|---|----------|---------------|
| Collector to Emitter Sustaining Voltage | $V_{CEO(sus)}$ | $I_C = 0.1\text{A}$ | Min 40 | V |
| Collector Cutoff Current | I_{CBO} | At rated Voltage | Max 0.1 | mA |
| | I_{CEO} | | Max 0.1 | |
| Emitter Cutoff Current | I_{EBO} | At rated Voltage | Max 0.1 | mA |
| DC Current Gain | h_{FE} | $V_{CE} = 2\text{V}, I_C = 5\text{A}$ | Min 70 | |
| Collector to Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 5\text{A}$ | Max 0.3 | V |
| Base to Emitter Saturation Voltage | $V_{BE(sat)}$ | $I_B = 0.5\text{A}$ | Max 1.2 | V |
| Thermal Resistance | θ_{jc} | Junction to case | Max 12.5 | °C/W |
| Transition Frequency | f_T | $V_{CE} = 10\text{V}, I_C = 1\text{A}$ | TYP 50 | MHz |
| Turn on Time | t_{on} | $I_C = 5\text{A}$ $I_{B1} = 0.5\text{A}, I_{B2} = 0.5\text{A}$ $R_L = 5\Omega, V_{BB2} = 4\text{V}$ | Max 0.3 | μs |
| Storage Time | t_s | | Max 1.5 | |
| Fall Time | t_f | | Max 0.5 | |

2SC4669

$h_{FE} - I_C$

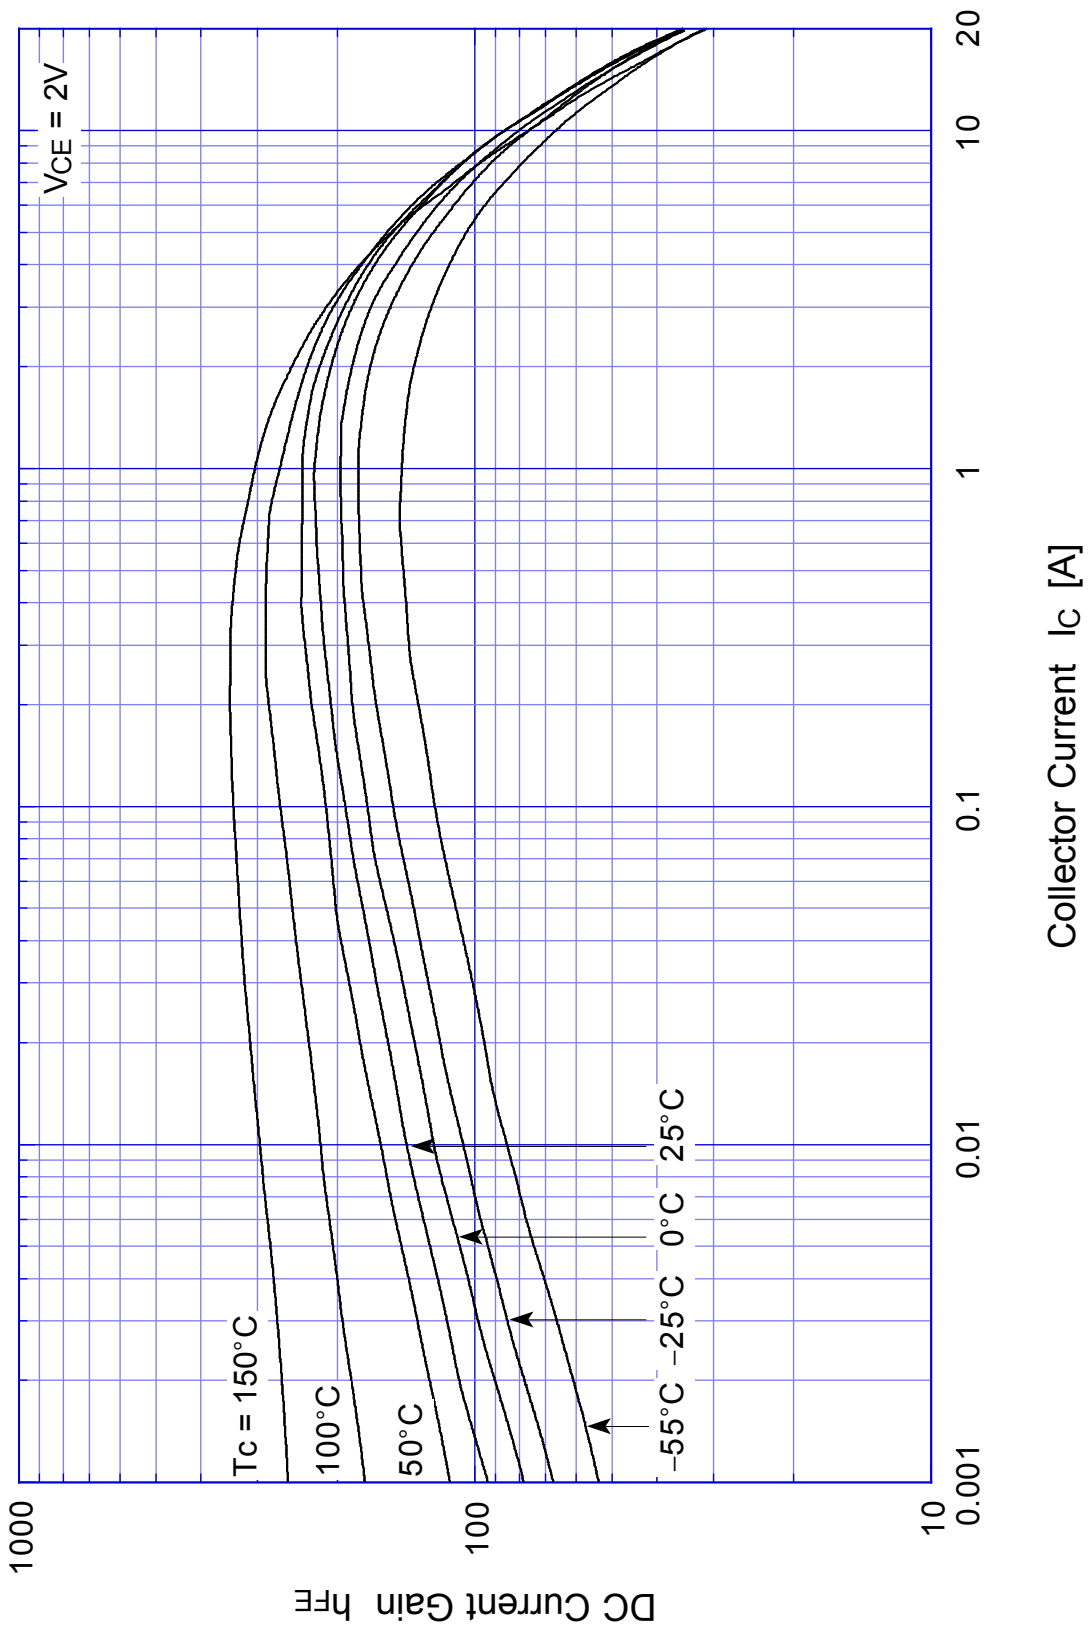


2SC4669 Saturation Voltage

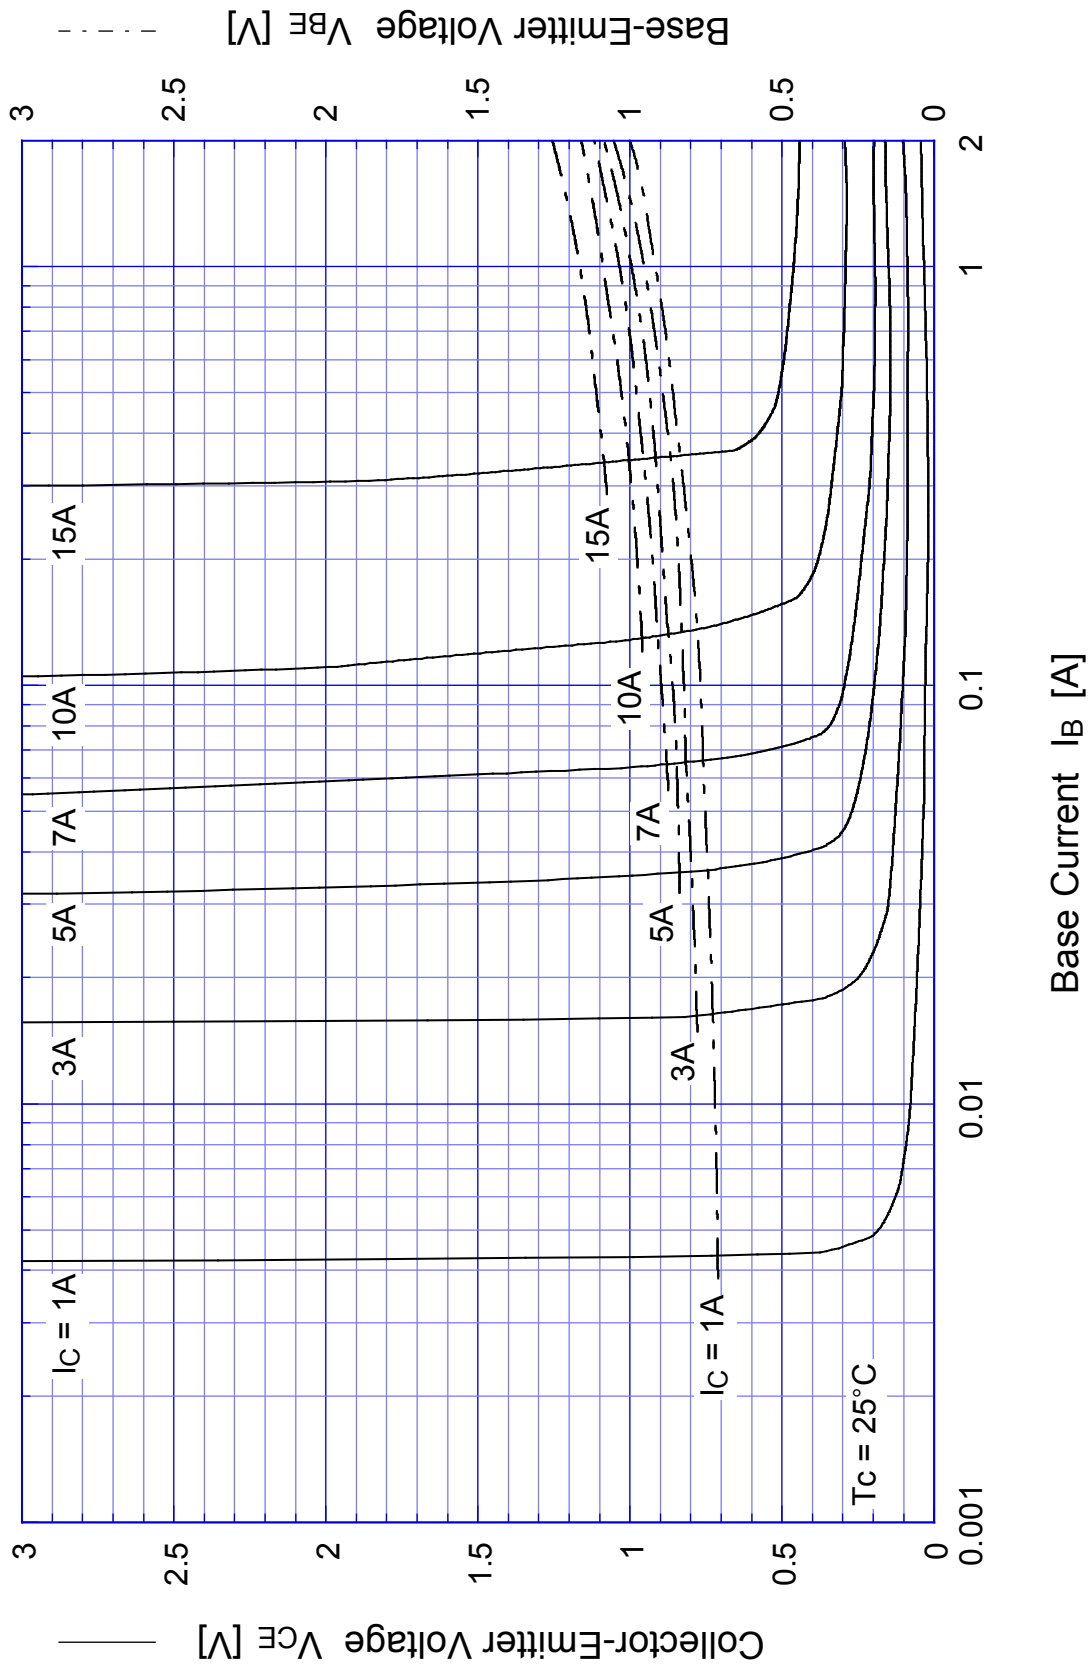


2SC4669

Switching Time - I_C

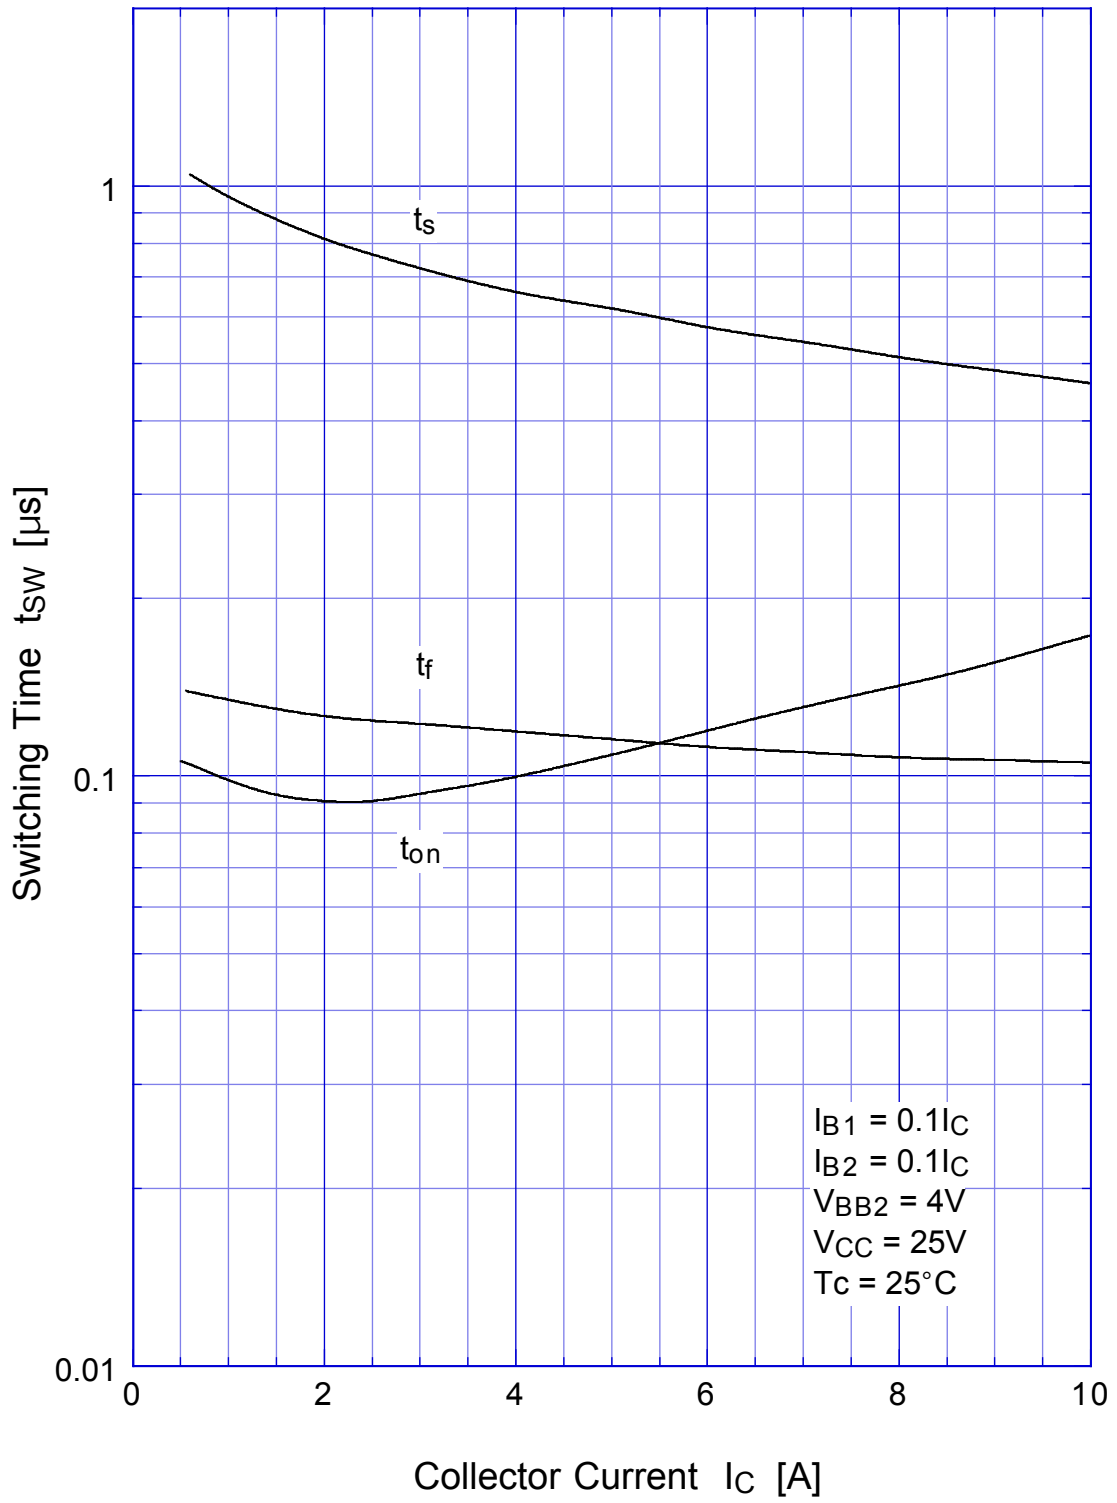


2SC4669

Switching Time - Tc

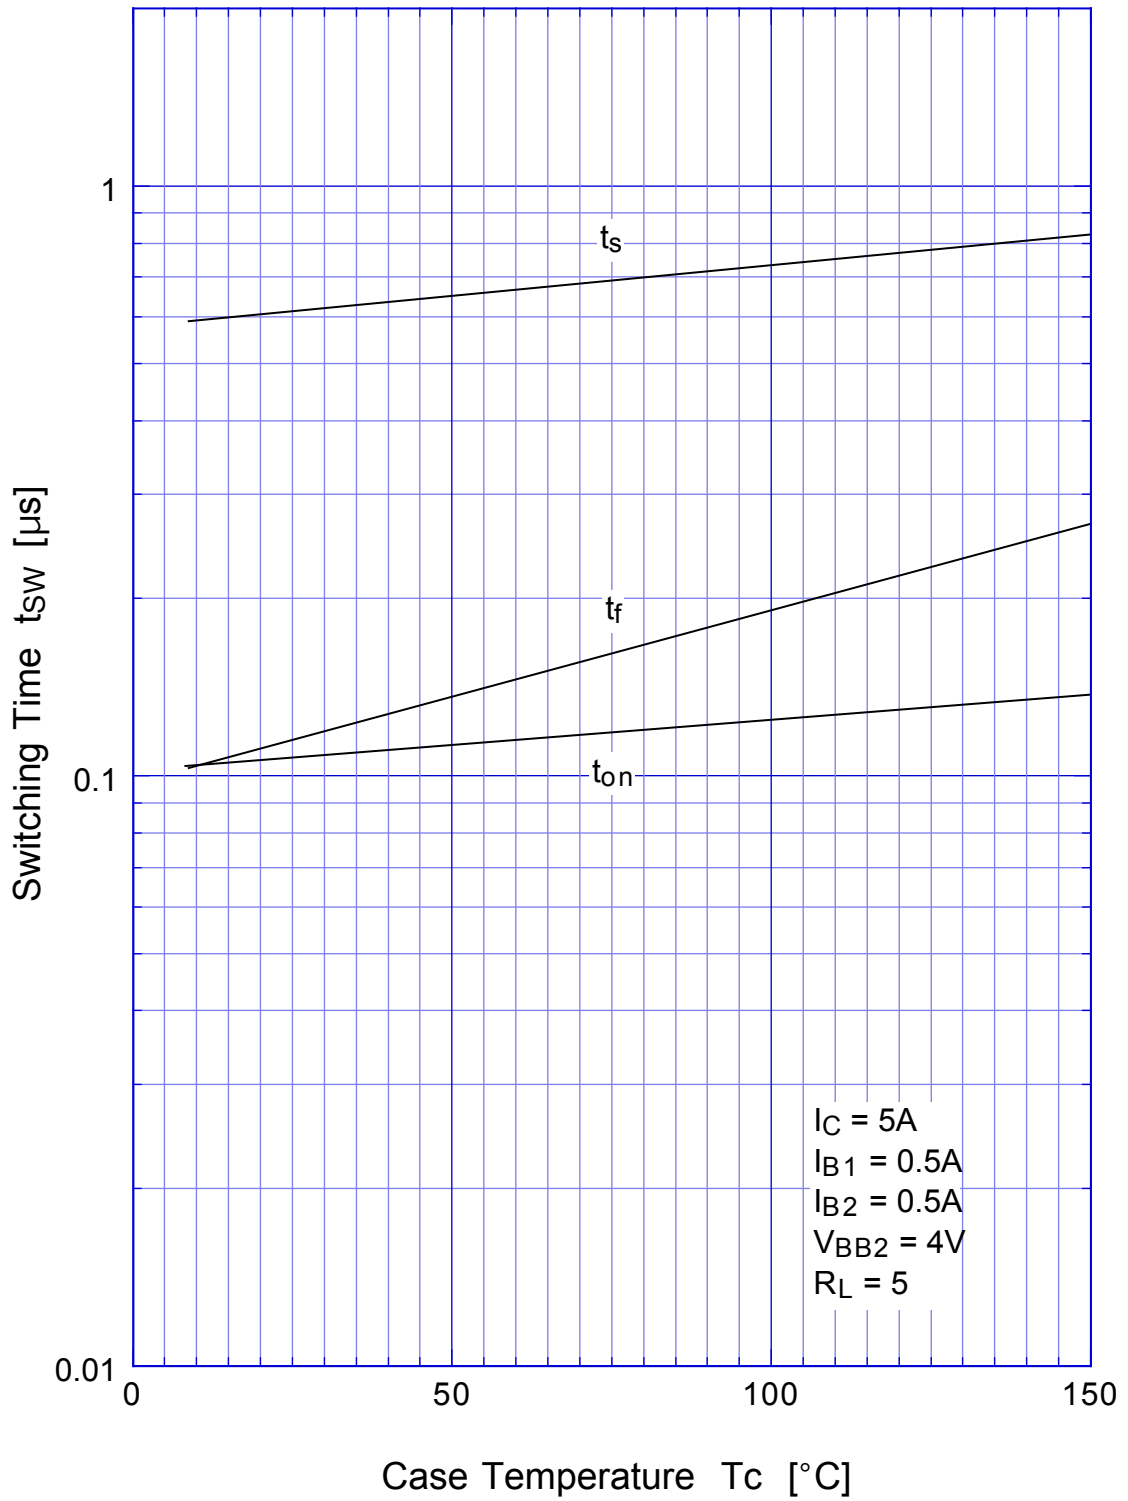


2SC4669 Transient Thermal Impedance

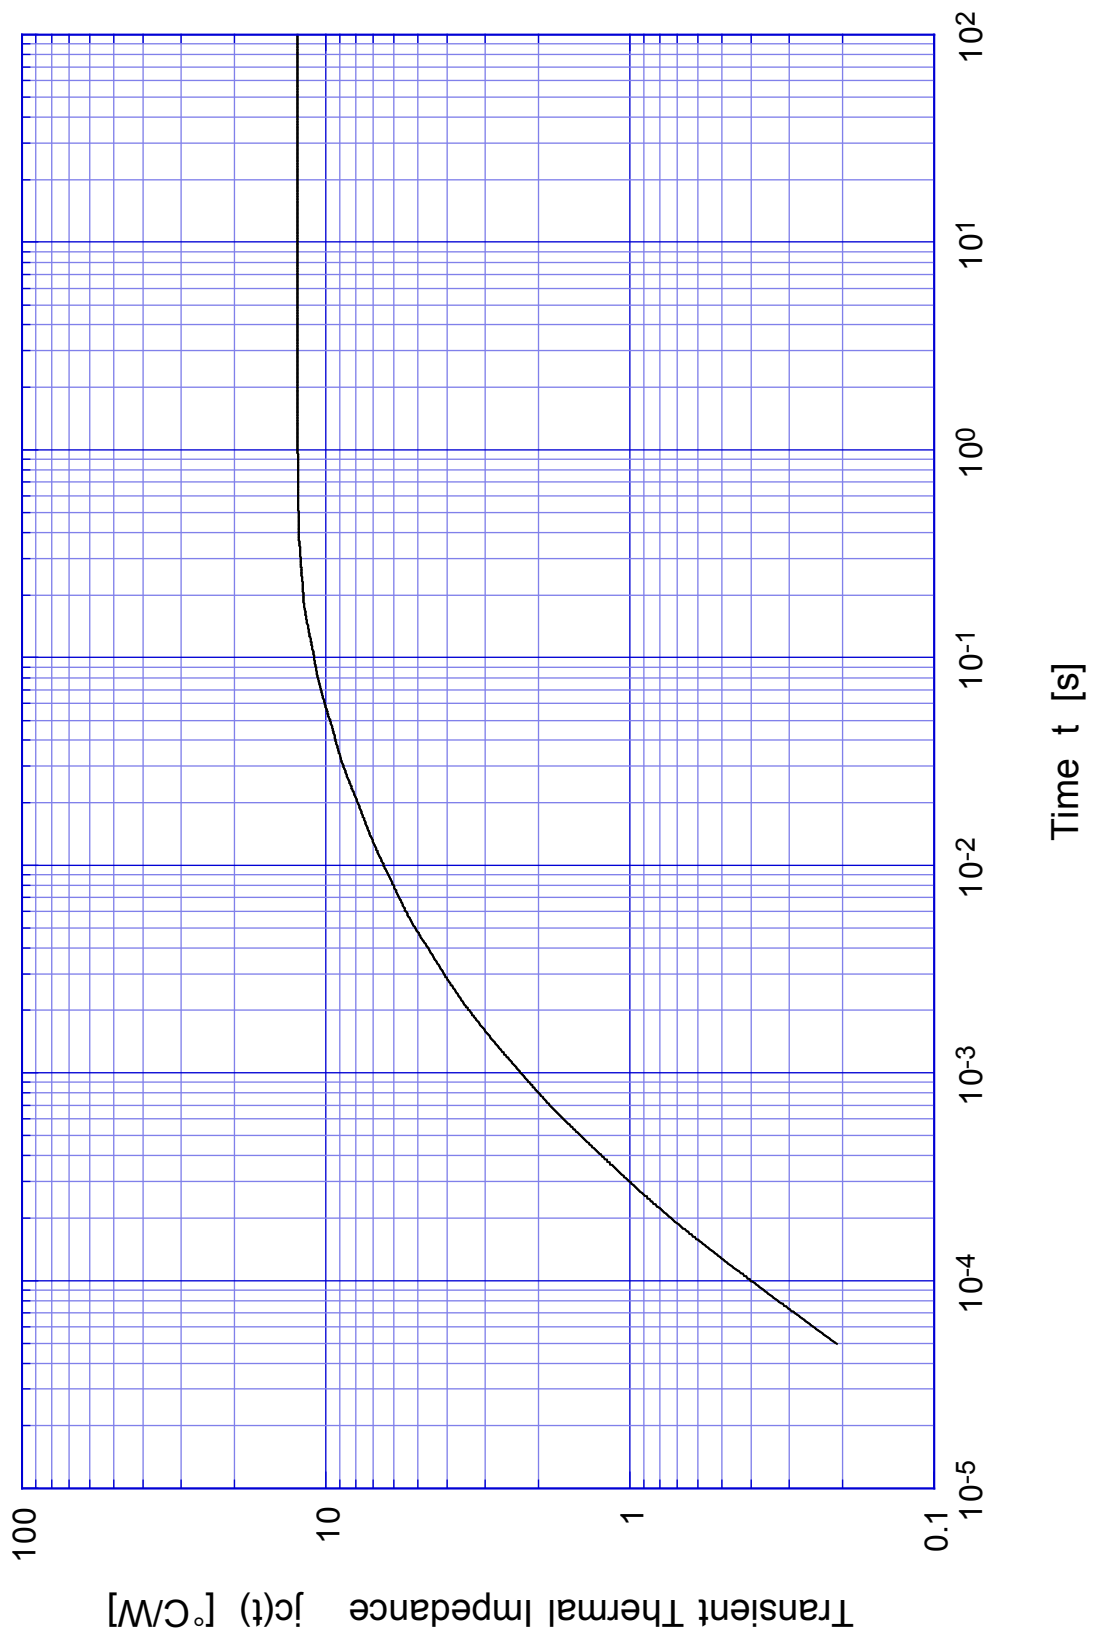

2SC4669

Forward Bias SOA

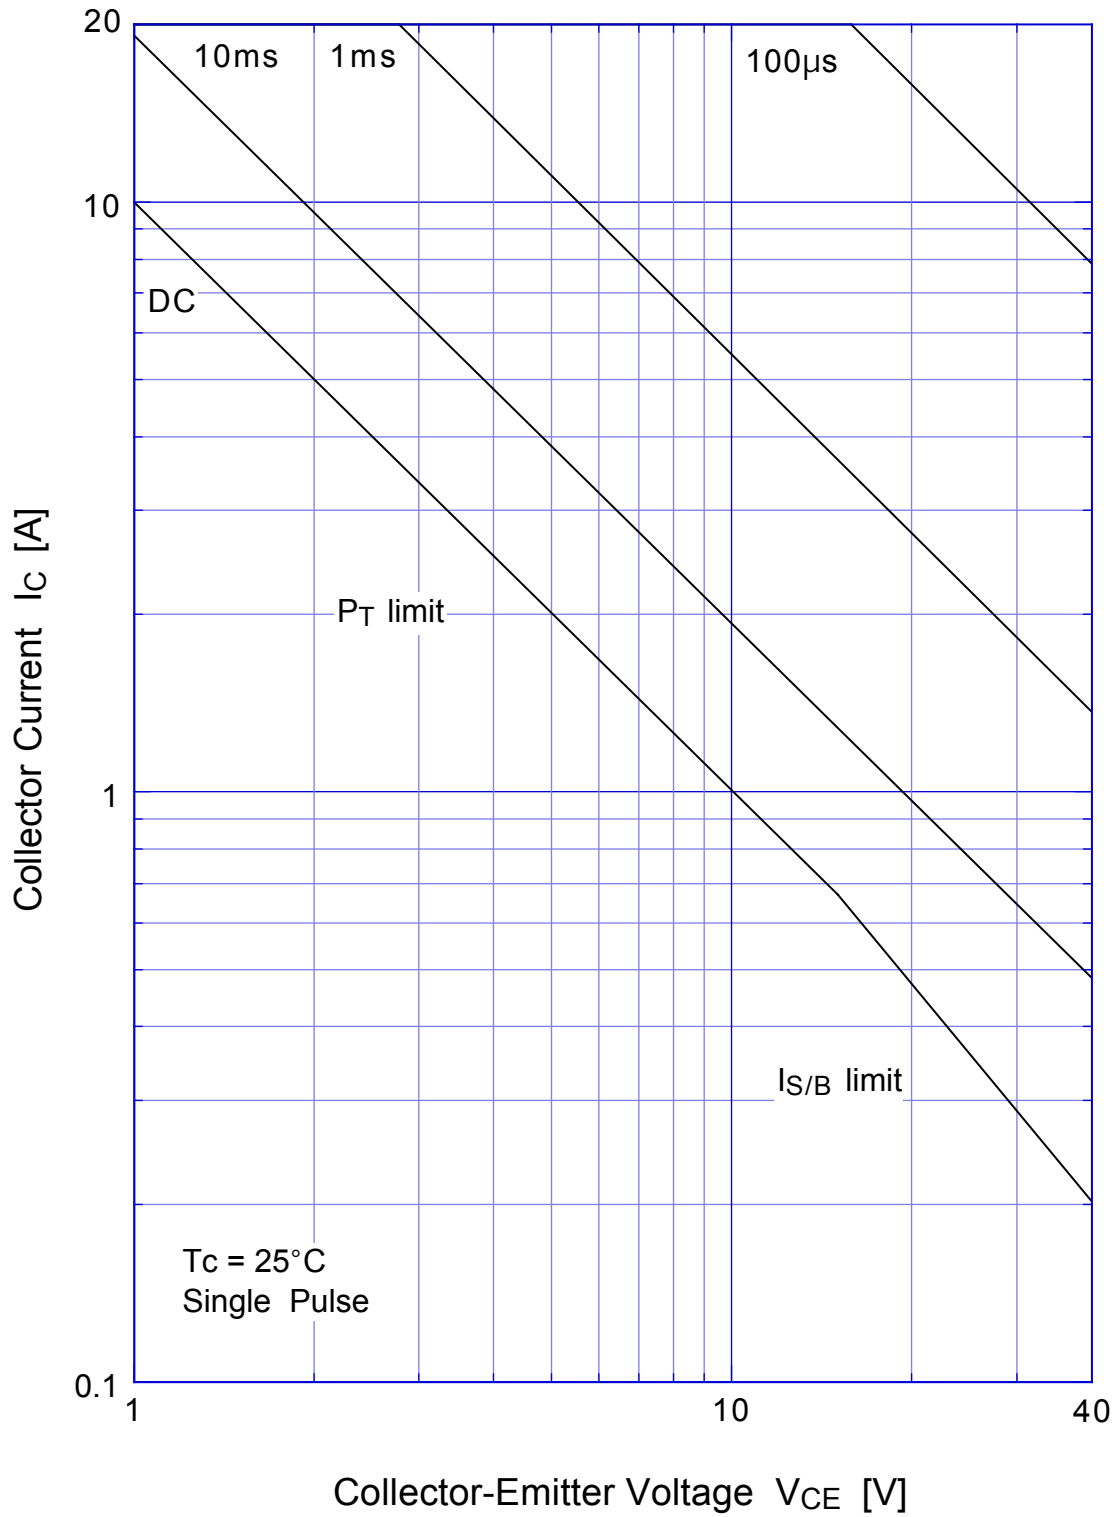

2SC4669 Collector Current Derating



2SC4669

Reverse Bias SOA

