

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.0Kg min.

Electrical

Voltage Rating: 750V Current Rating: 1A

Contact Resistance: $45m\Omega$ max.

Dielectrical Withstanding Voltage: 1000V Insulation Resistance: $1000M\Omega$ min.

Physical


Housing: LCP, UL 94-0, Ivory White

Contact: Phosghor Bronze


Plating: See "ORDERING INFORMATION"


FUTURE BUS CONNECTOR

1F Series, Plug. Press Fit Type 2.0mm Pitch 4 Rows



DRAWING

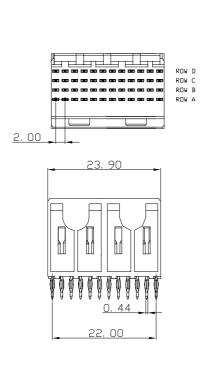




40

TAIL DIM.

ORDERING INFORMATION

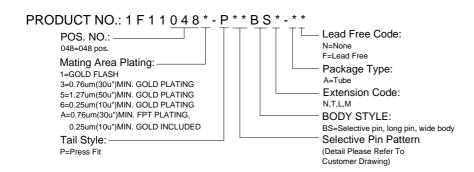

0.50 2. 00


<u>6. 00</u>

15, 80




Home | Contact Us | Site Map | Search | Sign In



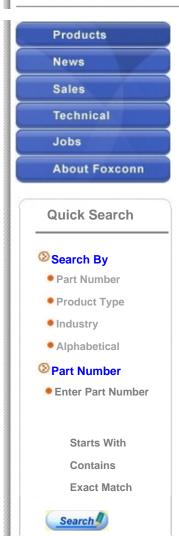

Backplane Connector -> Future Bus 2mm Conn

Future Bus 2mm Conn 4Row Signal Header: 1F11048A-P02BSN-AN



1F Series, Plug. Press Fit Type 2.0mm Pitch 4 Rows



Notice: Please confirm part availability with your local account manager.

Terms of use | Privacy | Disclaimer (C) 2000, 2006, Foxconn Electronics, Inc., All Rights Reserved.