

2.0mm (0.079") Pin Housing

PH Series


FEATURES

2-16 Circuits
 Post: Brass, Copper-Undercoated,
 Tin/Lead-Plated
 Wafer: Nylon, UL 94V-0

SPECIFICATIONS


Current Rating: 3A AC DC
 Voltage Rating: 250V AC Maximum
 Temperature Range: -25°C~+90°C
 Contact Resistance: Initial Value/10 m ohm max
 After Environmental Testing
 /20 m ohm min
 Insulation Resistance: 1000 M ohm min
 Withstand Voltage: 1500V AC/minute
 P.C.Board Thickness: 1.6mm(.063")

Contact

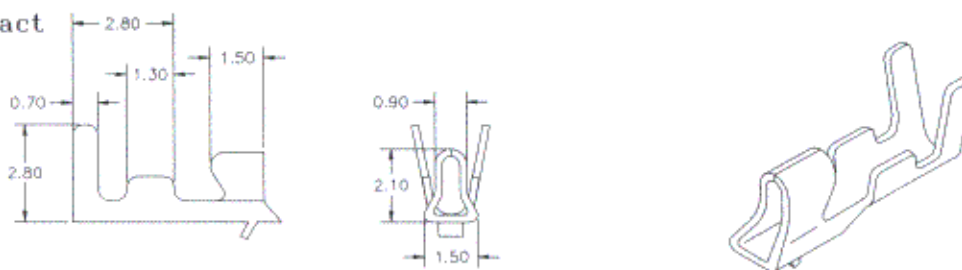

Model No.	Applicable Wire			Material	Finish
	mm ²	AWG #	Insulation O.D.		
PH-C-2	0.08 to 0.22	32 to 24	0.9 to 1.5	Phosphor Bronze	Tin-Plated
PH-C-4	0.032 to 0.08	32 to 28	0.5 to 0.9		

Housing

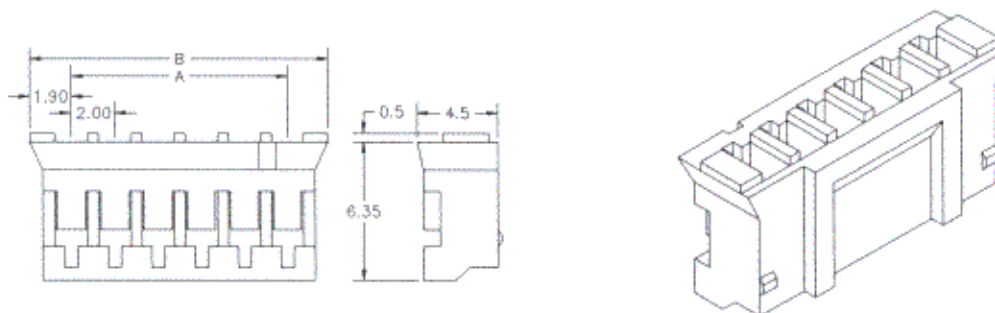

Circuits	Model No.	Dimension mm	
		A	B
2	PH-H- 2	2.0	5.8
3	PH-H- 3	4.0	7.8
4	PH-H- 4	6.0	9.8
5	PH-H- 5	8.0	11.8
6	PH-H- 6	10.0	13.8
7	PH-H- 7	12.0	15.8
8	PH-H- 8	14.0	17.8
9	PH-H- 9	16.0	19.8

Circuits	Model No.	Dimension mm	
		A	B
10	PH-H-10	18.0	21.8
11	PH-H-11	20.0	23.8
12	PH-H-12	22.0	25.8
13	PH-H-13	24.0	27.8
14	PH-H-14	26.0	29.8
15	PH-H-15	28.0	31.8
16	PH-H-16	30.0	33.8

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884