



87CNQ020APbF 87CNQ020ASMPbF

SCHOTTKY RECTIFIER
New GenIII D-61 Package

80 Amp

Major Ratings and Characteristics





Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	80	A
V_{RRM}	20	V
I_{FSM} @tp = 5 μ s sine	6000	A
V_F @40 Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.32	V
T_J range	-55 to 150	$^\circ\text{C}$

Description/ Features

The center tap Schottky rectifier module has been optimized for ultra low forward voltage drop specifically for 3.3V output power supplies. The proprietary barrier technology allows for reliable operation up to 150 $^\circ\text{C}$ junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power subsystems.

- 150 $^\circ\text{C}$ T_J operation
- Center tap module
- Optimized for 3.3V application
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- *New fully transfer-mold low profile, small footprint, high current package*
- Through-hole versions are currently available for use in Lead-Free applications ("PbF" suffix)

Case Styles
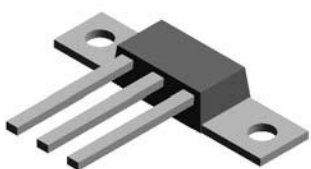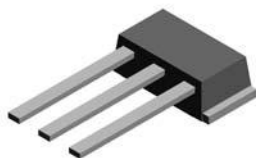
<p>87CNQ020APbF</p>   <p>D61-8</p>	<p>87CNQ020ASMPbF</p>   <p>D61-8-SM</p>
---	--

Voltage Ratings

Part number	87CNQ020A..		
V _R Max. DC Reverse Voltage (V)	@ 125° C	20	
V _R Max. DC Reverse Voltage (V)	@ 150° C	10	

Absolute Maximum Ratings

Parameters	87CNQ	Units	Conditions
I _{F(AV)} Max. Average Forward (Per Device) Current (Per Leg)	80 40	A	50% duty cycle @ T _C = 135°C, rectangular wave form
I _{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg)	6000 1100	A	5µs Sine or 3µs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V _{RRM} applied
E _{AS} Non-Repetitive Avalanche Energy (Per Leg)	36	mJ	T _J = 25°C, I _{AS} = 8 Amps, L = 1.12 mH
I _{AR} Repetitive Avalanche Current (Per Leg)	8	A	Current decaying linearly to zero in 1 µsec Frequency limited by T _J max. V _A = 1.5 x V _R typical

Electrical Specifications

Parameters	87CNQ	Units	Conditions
V _{FM} Max. Forward Voltage Drop (Per Leg) (1)	0.45	V	@ 40A T _J = 25°C
	0.51	V	@ 80A T _J = 25°C
	0.32	V	@ 40A T _J = 125°C
	0.39	V	@ 80A T _J = 125°C
	0.29	V	@ 40A T _J = 150°C
	0.37	V	@ 80A T _J = 150°C
I _{RM} Max. Reverse Leakage Current (Per Leg) (1)	5.5	mA	T _J = 25°C V _R = rated V _R
	550	mA	T _J = 125°C V _R = rated V _R
	90	mA	T _J = 125°C V _R = 5V
	70	mA	T _J = 125°C V _R = 3.3V
	480	mA	T _J = 150°C V _R = 10V
V _{F(TO)} Threshold Voltage	0.191	V	T _J = T _J max.
r _t Forward Slope Resistance	2.3	mΩ	
C _T Max. Junction Capacitance (Per Leg)	6500	pF	V _R = 5V _{DC} (test signal range 100Khz to 1Mhz) 25°C
L _S Typical Series Inductance (Per Leg)	5.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change (Rated V _R)	10000	V/µs	

(1) Pulse Width < 300µs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters	87CNQ	Units	Conditions
T _J Max. Junction Temperature Range	-55 to 150	°C	
T _{stg} Max. Storage Temperature Range	-55 to 150	°C	
R _{thJC} Max. Thermal Resistance Junction to Case (Per Leg)	0.85	°C/W	DC operation
R _{thJC} Max. Thermal Resistance Junction to Case (Per Package)	0.42	°C/W	DC operation
R _{thCS} Typical Thermal Resistance, Case to Heatsink (D61-8 Only)	0.30	°C/W	Mounting surface, smooth and greased Device flatness < 5 mils
wt Approximate Weight	7.8 (0.28)	g (oz.)	
T Mounting Torque (D61-8 Only)	Min.	40 (35)	Kg-cm (lbf-in)
	Max.	58 (50)	

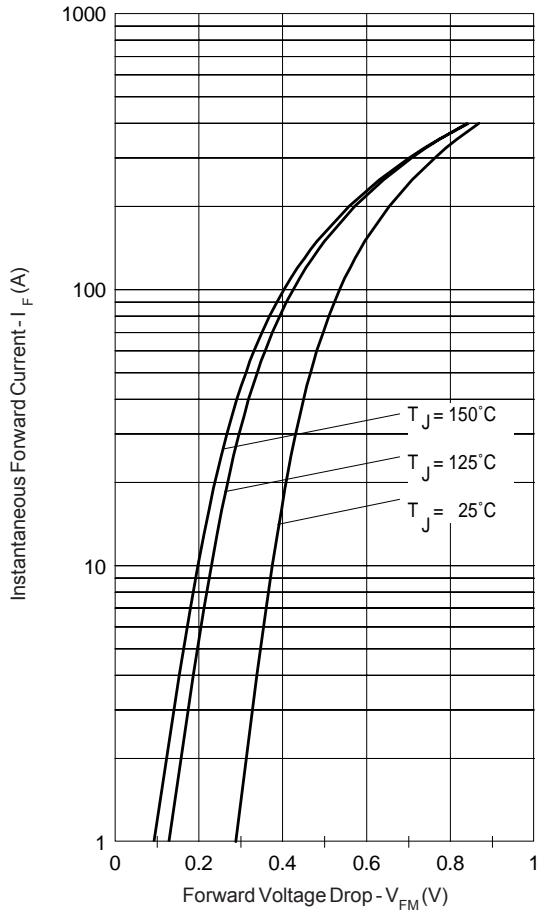


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

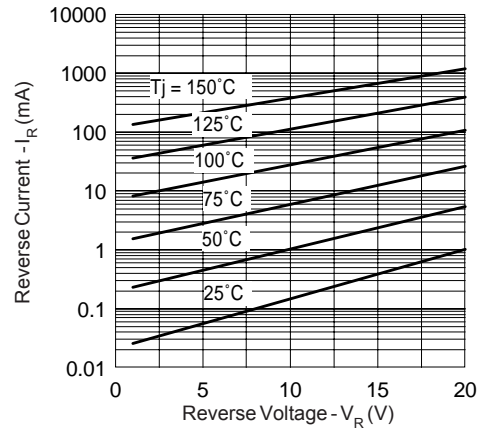


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

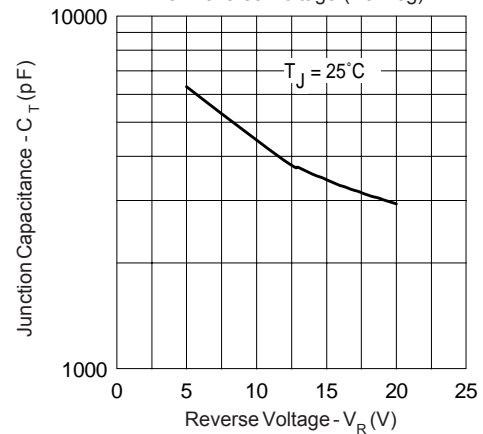


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

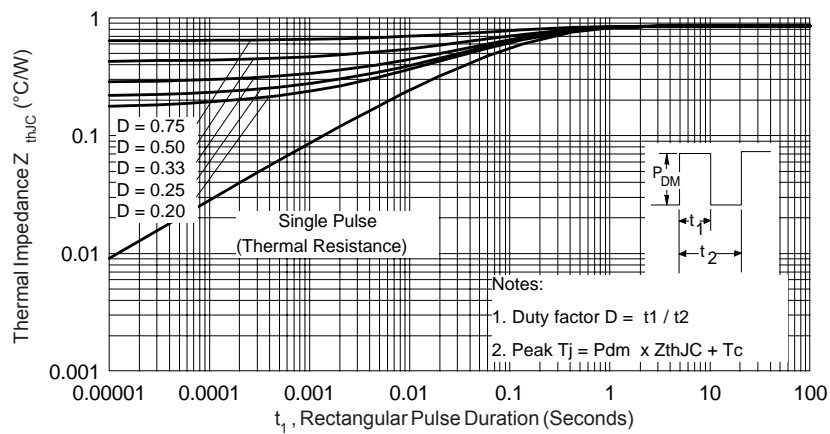


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

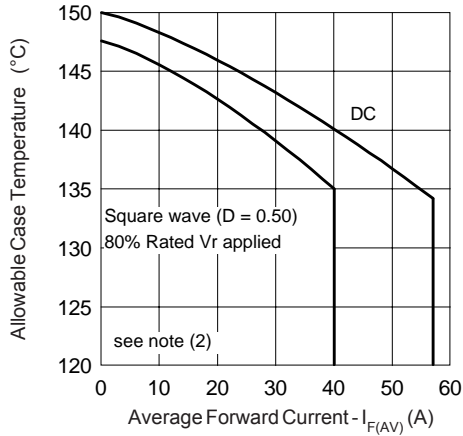


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

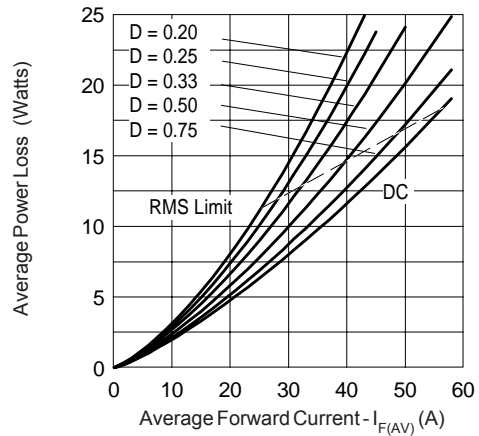


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

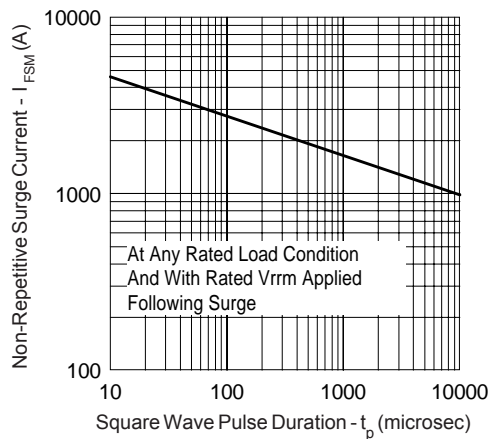


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


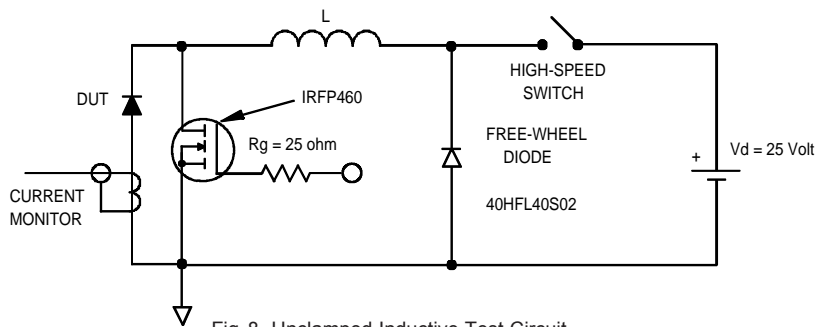


Fig. 8 - Unclamped Inductive Test Circuit

- (2) Formula used: $T_C = T_J - (P_d + P_{d_{REV}}) \times R_{thJC}$;
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$ (see Fig. 6);
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_R (1 - D)$; $I_R @ V_{R1} = 80\% \text{ rated } V_R$

Outline Table

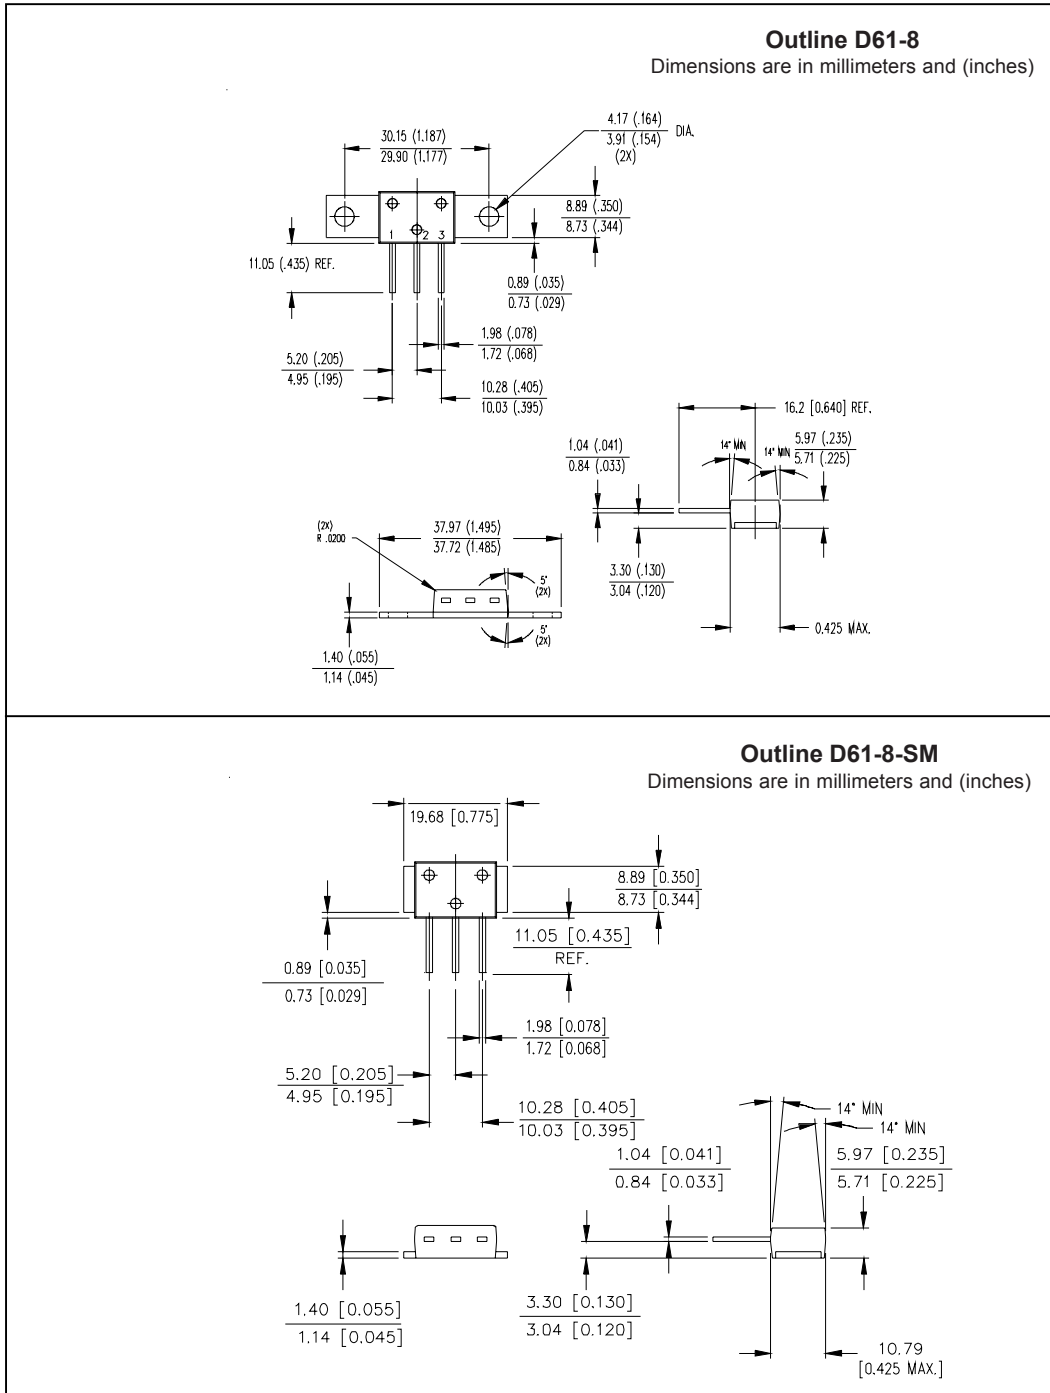


Outline D61-8-SM
 Dimensions are in millimeters and (inches)

Part Marking Information

D61-8

EXAMPLE: THIS IS A 87CNQ020A WITH
 LOT CODE 89 09
 ASSEMBLED ON WW 45, 2000
 IN THE ASSEMBLY LINE "A"


Note: "P" in assembly line
 position indicates "Lead-Free"

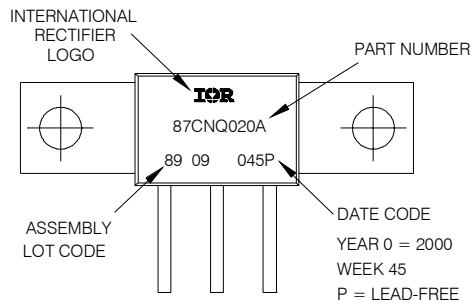

D61-8-SM

EXAMPLE: THIS IS A 87CNQ020ASM WITH
 LOT CODE 89 09
 ASSEMBLED ON WW 45, 2000

Note: "P" in assembly line
 position indicates "Lead-Free"

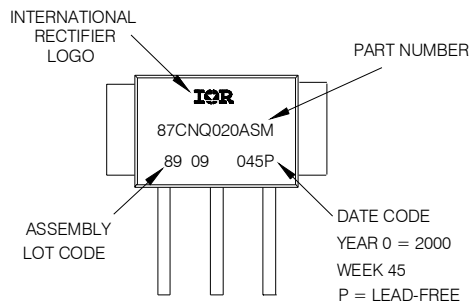

Ordering Information Table

Device Code						
87	C	N	Q	020	A	PbF
①	②	③	④	⑤	⑥	⑦
1	-	Current Rating (80A)				
2	-	Circuit Configuration				
		C = Common Cathode				
3	-	Package				
		N = D-61				
4	-	Schottky "Q" Series				
5	-	Voltage Rating (020 = 20V)				
6	-	<ul style="list-style-type: none"> • A = D-61-8 package style • ASM = D-61-8-SM package style 				
7	-	<ul style="list-style-type: none"> • none = Standard Production • PbF = Lead-Free 				
Standard pack quantity: A = 10 pieces						
ASM = 20 pieces						

Data and specifications subject to change without notice.
 This product has been designed and qualified for Industrial Level and Lead-Free.
 Qualification Standards can be found on IR's Web site.



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.