


# 2.0mm SINGLE ROW SOCKET

## P.C.B MOUNT TYPE

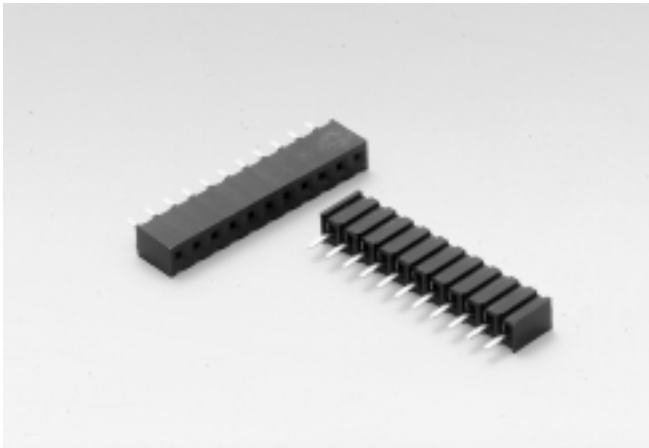


### 200130FS Series

Mates With SUYIN 200110,200111 Series

#### Specifications:

- **2-40 Circuits**
- **Insulator Material** : Black High Temp. Plastic
- **Max Processing Temp.** : -40°C to +105°C
- **Terminal Material** : Pho. bronze
- **Plating** : Contact-Selective Gold Plated  
or Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V (Min. 60 Seconds)

2.0  
mm

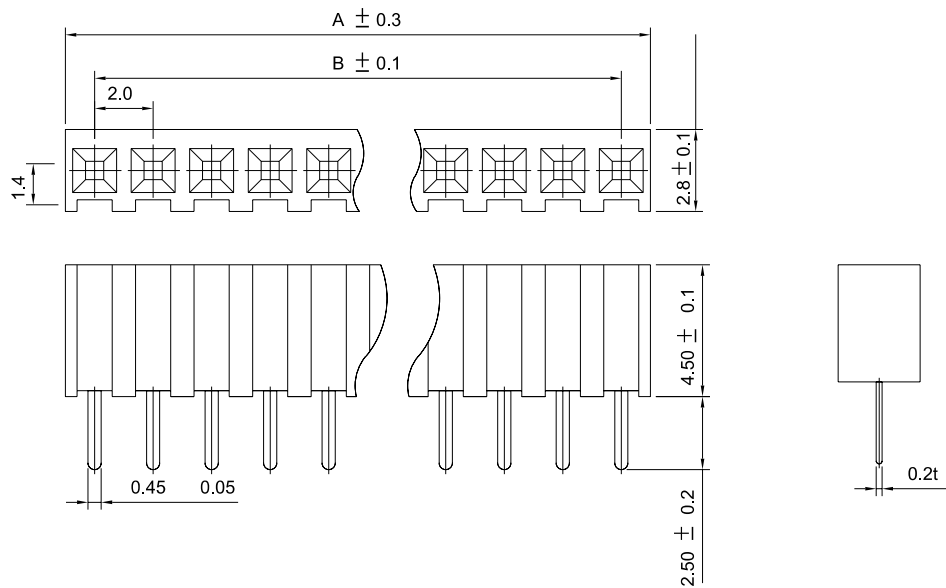

### Order Information

200130FS□□□□□00ZU  
 1 2 3 4 5

1. 'S': Straight DIP Type
  2. No. of Pins
  3. Plating
  4. Color 'Z': Black
  5. Package  
 'U': Tube Package Without CAP
- Reference Page 11

### Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200130FS002□□□00ZU	4.0	2.0	200130FS012□□□00ZU	24.0	22.0
200130FS003□□□00ZU	6.0	4.0	200130FS013□□□00ZU	26.0	24.0
200130FS004□□□00ZU	8.0	6.0	200130FS014□□□00ZU	28.0	26.0
200130FS005□□□00ZU	10.0	8.0	200130FS015□□□00ZU	30.0	28.0
200130FS006□□□00ZU	12.0	10.0	200130FS016□□□00ZU	32.0	30.0
200130FS007□□□00ZU	14.0	12.0	200130FS020□□□00ZU	40.0	38.0
200130FS008□□□00ZU	16.0	14.0	200130FS024□□□00ZU	48.0	46.0
200130FS009□□□00ZU	18.0	16.0	200130FS030□□□00ZU	60.0	58.0
200130FS010□□□00ZU	20.0	18.0	200130FS034□□□00ZU	68.0	66.0
200130FS011□□□00ZU	22.0	20.0	200130FS040□□□00ZU	80.0	78.0

### Recommended P.C.B Layout

