




# V20100S, VF20100S, VB20100S & VI20100S

New Product Vishay General Semiconductor

## High-Voltage Trench MOS Barrier Schottky Rectifier

Ultra Low  $V_F = 0.446$  V at  $I_F = 5$  A

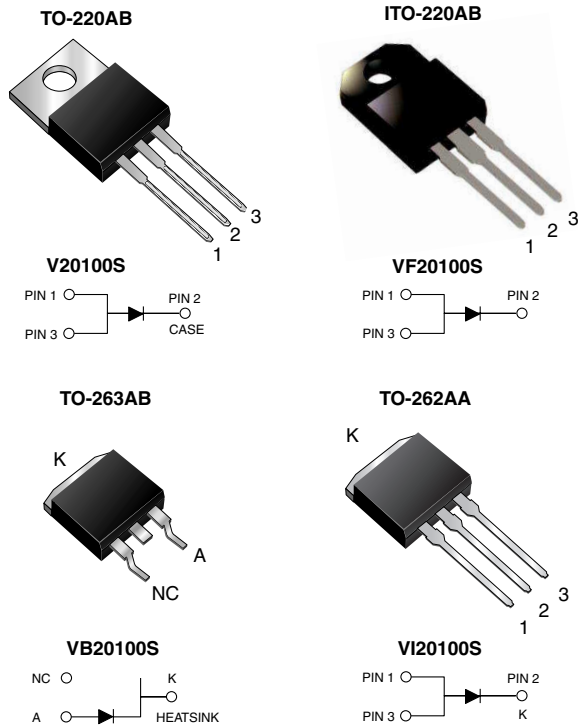

### FEATURES

- Trench MOS Schottky Technology
- Low forward voltage drop, low power losses
- High efficiency operation
- Low thermal resistance
- Meets MSL level 1, per J-STD-020C, LF max peak of 245 °C (for TO-263AB package)
- Solder Dip 260 °C, 40 seconds (for TO-220AB, ITO-220AB & TO-262AA package)
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

For use in high frequency inverters, switching power supplies, free-wheeling diodes, oring diode, dc-to-dc converters and reverse battery protection.

### MECHANICAL DATA

**Case:** TO-220AB, ITO-220AB, TO-263AB & TO-262AA

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

**Polarity:** As marked

**Mounting Torque:** 10 in-lbs maximum

### MAJOR RATINGS AND CHARACTERISTICS

$I_{F(AV)}$	20 A
$V_{RRM}$	100 V
$I_{FSM}$	250 A
$V_F$ at $I_F = 20$ A	0.690 V
$T_j$ max.	150 °C

### MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)

PARAMETER	SYMBOL	V20100S	VF20100S	VB20100S	VI20100S	UNIT
Maximum repetitive peak reverse voltage	$V_{RRM}$	100				V
Maximum average forward rectified current (see Fig. 1)	$I_{F(AV)}$	20				A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	$I_{FSM}$	250				A
Peak repetitive reverse current per leg at $t_p = 2$ $\mu$ s, 1 kHz	$I_{RRM}$	1.0				A
Voltage rate of change (rated $V_R$ )	dv/dt	10000				V/ $\mu$ s
Isolation voltage (ITO-220AB only) From terminal to heatsink $t = 1$ minute	$V_{AC}$	1500				V
Operating junction and storage temperature range	$T_J, T_{STG}$	- 40 to + 150				°C

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)						
PARAMETER	TEST CONDITIONS		SYMBOL	TYP.	MAX.	UNIT
Breakdown voltage	at $I_R = 1.0\text{ mA}$	$T_j = 25\text{ }^\circ\text{C}$	$V_{(BR)}$	100 (minimum)	-	V
Instantaneous forward voltage <sup>(1)</sup>	at $I_F = 5\text{ A}$ $I_F = 10\text{ A}$ $I_F = 20\text{ A}$	$T_j = 25\text{ }^\circ\text{C}$	$V_F$	0.510	-	V
		$T_j = 125\text{ }^\circ\text{C}$		0.600 0.789	- 0.85	
Reverse current <sup>(1)</sup>	at $V_R = 70\text{ V}$  at $V_R = 100\text{ V}$	$T_j = 25\text{ }^\circ\text{C}$ $T_j = 125\text{ }^\circ\text{C}$	$I_R$	16.5 7.0	- -	$\mu\text{A}$ mA
		$T_j = 25\text{ }^\circ\text{C}$ $T_j = 125\text{ }^\circ\text{C}$		70 13.8	500 30	$\mu\text{A}$ mA

**Note:**

(1) Pulse test: 300  $\mu\text{s}$  pulse width, 1 % duty cycle

<b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)						
PARAMETER	SYMBOL	V20100S	VF20100S	VB20100S	VI20100S	UNIT
Typical thermal resistance	$R_{\theta JC}$	2.0	4.0	2.0	2.0	$^\circ\text{C/W}$

<b>ORDERING INFORMATION</b>					
PACKAGE	PREFERRED P/N	UNIT WEIGHT (g)	PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TO-220AB	V20100S-E3/4W	1.878	4W	50/Tube	Tube
ITO-220AB	VF20100S-E3/45	1.801	45	50/Tube	Tube
TO-263AB	VB20100S-E3/4W	1.371	4W	50/Tube	Tube
TO-263AB	VB20100S-E3/8W	1.371	8W	800/Reel	Tape & Reel
TO-262AA	VI20100S-E3/4W	1.450	4W	50/Tube	Tube

## RATINGS AND CHARACTERISTICS CURVES

( $T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)

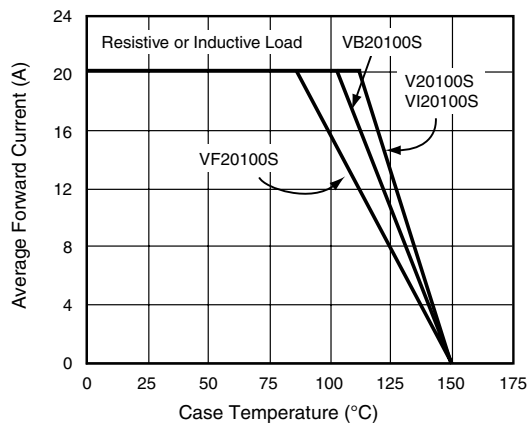


Figure 1. Maximum Forward Current Derating Curve

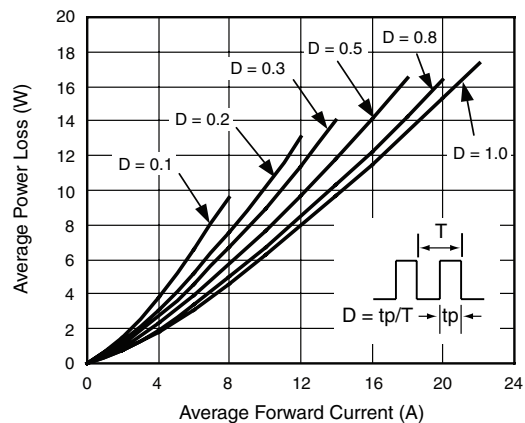


Figure 2. Forward Power Loss Characteristics

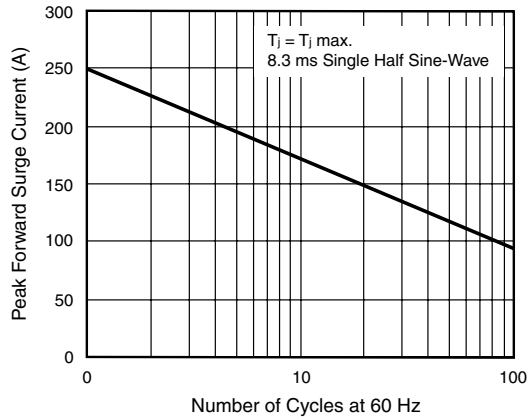


Figure 3. Maximum Non-Repetitive Peak Forward Surge Current

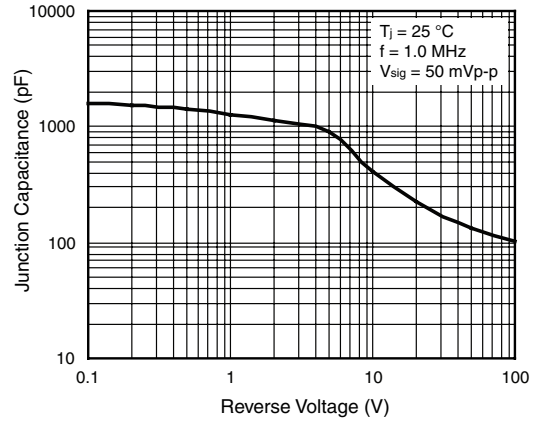


Figure 6. Typical Junction Capacitance

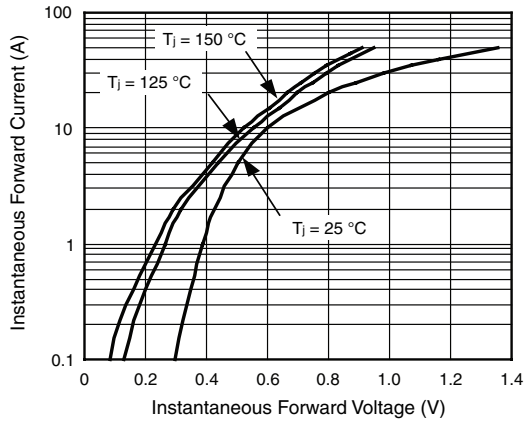


Figure 4. Typical Instantaneous Forward Characteristics

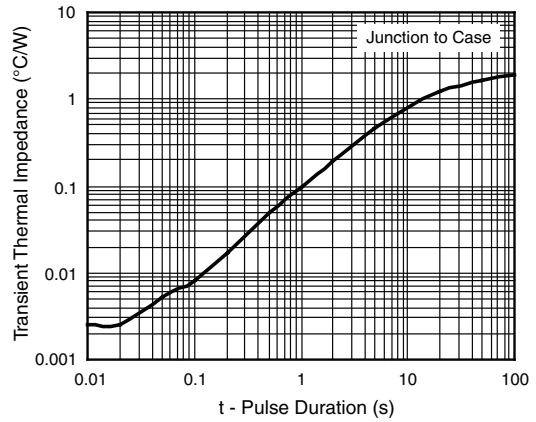


Figure 7. Typical Transient Thermal Impedance


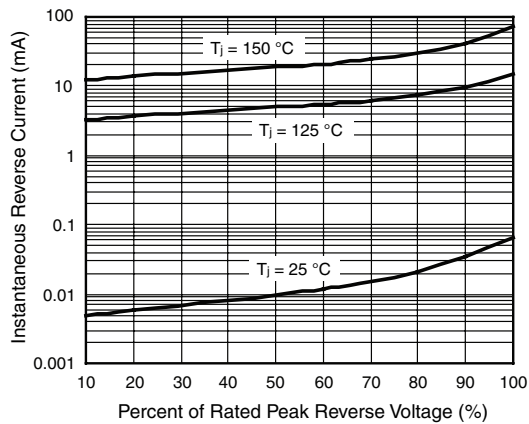



Figure 5. Typical Reverse Characteristics

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

TO-220AB

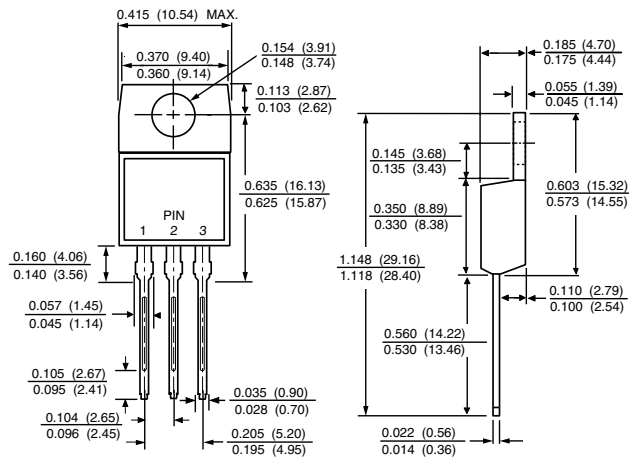


ITO-220AB

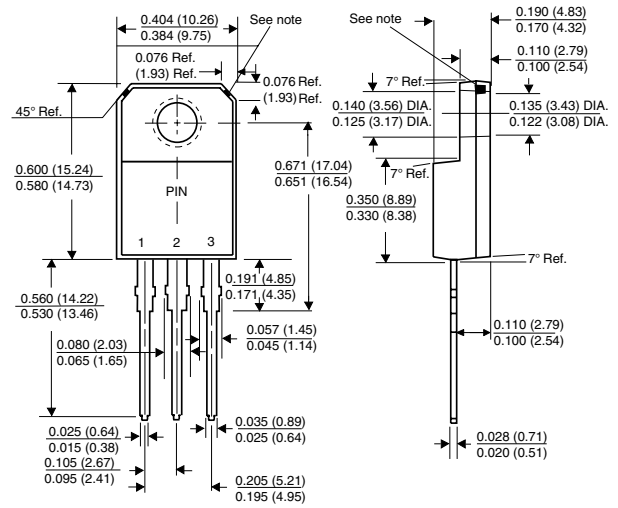


Note: Copper exposure is allowable for 0.005 (0.13) Max. from the body


TO-262AA

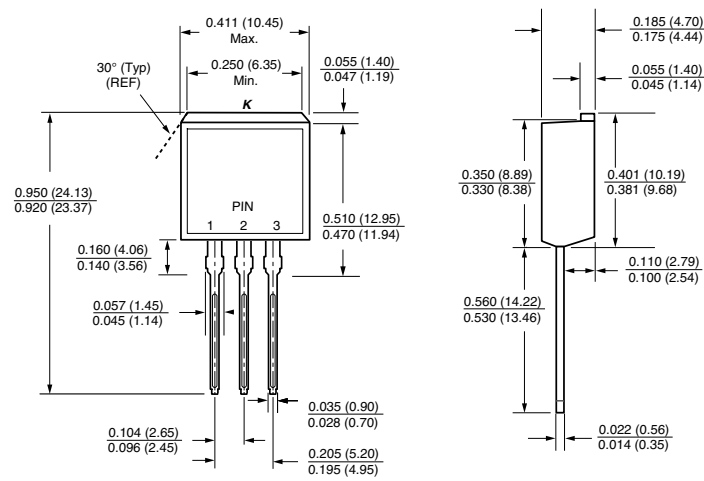

TO-263AB

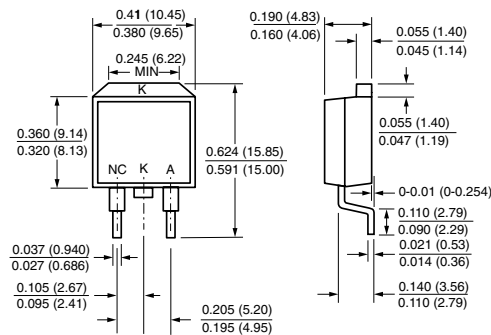

Mounting Pad Layout





## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.