

Technical Data  
Data Sheet 36 , Rev. A

**400CMQ035/400CMQ040/400CMQ045**  
**SCHOTTKY RECTIFIER**


**Applications:**

- High current switching power supply • Plating power supply • Free-Wheeling diodes
- Reverse battery protection • Converters • UPS System • Welding

**Features:**

- 150 °C T<sub>J</sub> operation
- Center tap module
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Mechanical Dimensions: In Inches / mm**

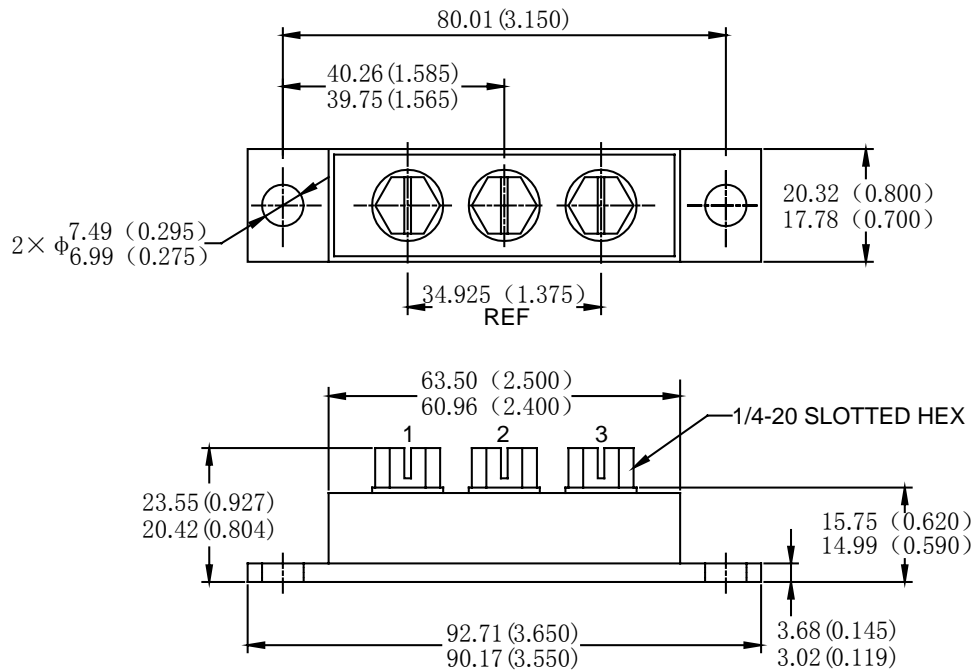

Please Note: Anode 1 = Terminal 1; Anode 2 = Terminal 3; Common Cathode = Terminal 2  
Suffix R Denotes for Reversed Polarity.

**PRM4 (Isolated)**

Data Sheet 3167, Rev. A  
Maximum Ratings:

Characteristics	Symbol	Condition	Max.	Units	
Peak Inverse Voltage	$V_{RWM}$	-	35(400CMQ035) 40(400CMQ040) 45(400CMQ045)	V	
Max. Average Forward Current	$I_{F(AV)}$	50% duty cycle @ $T_C = 104^\circ\text{C}$ , rectangular wave form	200	per leg	A
			400	per device	
Max. Peak One Cycle Non-Repetitive Surge Current (per leg)	$I_{FSM}$	8.3 ms, half Sine pulse	4080	A	
Non-Repetitive Avalanche Energy (per leg)	$E_{AS}$	$T_J = 25^\circ\text{C}$ , $I_{AS} = 40\text{ A}$ , $L = 0.22\text{ mH}$	180	mJ	
Repetitive Avalanche Current (per leg)	$I_{AR}$	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical	40	A	

Electrical Characteristics:

Characteristics	Symbol	Condition	Max.	Units
Max. Forward Voltage Drop (per leg) *	$V_{F1}$	@ 200 A, Pulse, $T_J = 25^\circ\text{C}$	0.57	V
		@ 400 A, Pulse, $T_J = 25^\circ\text{C}$	0.73	
	$V_{F2}$	@ 200 A, Pulse, $T_J = 125^\circ\text{C}$	0.52	V
		@ 400 A, Pulse, $T_J = 125^\circ\text{C}$	0.68	
Max. Reverse Current (per leg) *	$I_{R1}$	@ $V_R = \text{rated } V_R$ , $T_J = 25^\circ\text{C}$	20	mA
		@ $V_R = \text{rated } V_R$ , $T_J = 125^\circ\text{C}$	800	
Max. Junction Capacitance (per leg)	$C_T$	@ $V_R = 5\text{ V}$ , $T_C = 25^\circ\text{C}$ $f_{SIG} = 1\text{ MHz}$	10300	pF
Typical Series Inductance (per leg)	$L_S$	Measured lead to lead 5 mm from package body	5.0	nH
Max. Voltage Rate of Change	$dv/dt$	-	10,000	V/ $\mu\text{s}$
Insulation Voltage	$V_{RMS}$		1000	V


\* Pulse Width < 300 $\mu\text{s}$ , Duty Cycle <2%

Thermal-Mechanical Specifications:


Characteristics	Symbol	Condition	Specification	Units	
Max. Junction Temperature	$T_J$	-	-55 to +150	$^\circ\text{C}$	
Max. Storage Temperature	$T_{stg}$	-	-55 to +150	$^\circ\text{C}$	
Maximum Thermal Resistance Junction to Case (per leg)	$R_{\theta JC}$	DC operation	0.40	$^\circ\text{C/W}$	
Maximum Thermal Resistance Junction to Case (per package)	$R_{\theta JC}$	DC operation	0.20	$^\circ\text{C/W}$	
Maximum Thermal Resistance, Case to Heat Sink	$R_{\theta CS}$	Mounting surface, smooth and greased	0.10	$^\circ\text{C/W}$	
Approximate Weight	wt	-	79	g	
Mounting Torque	$T_M$	-	Mounting Torque Base	24 (min) 35 (max)	Kg-cm
			Terminal Torque	35 (min) 46 (max)	
Case Style	PRM4 Isolated				

Data Sheet 3167, Rev. A

**Typical Forward Characteristics**

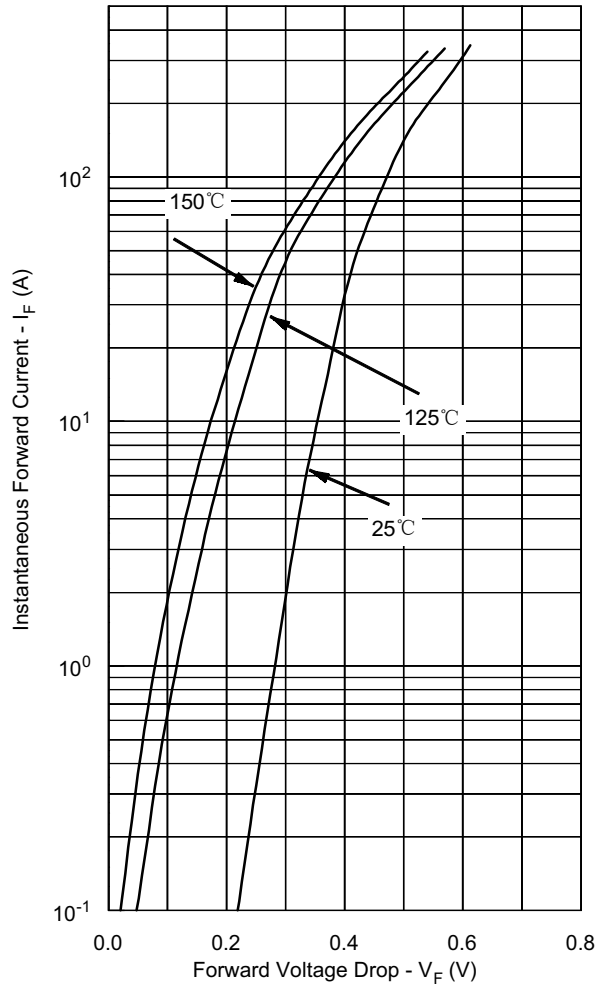

**Typical Reverse Characteristics**

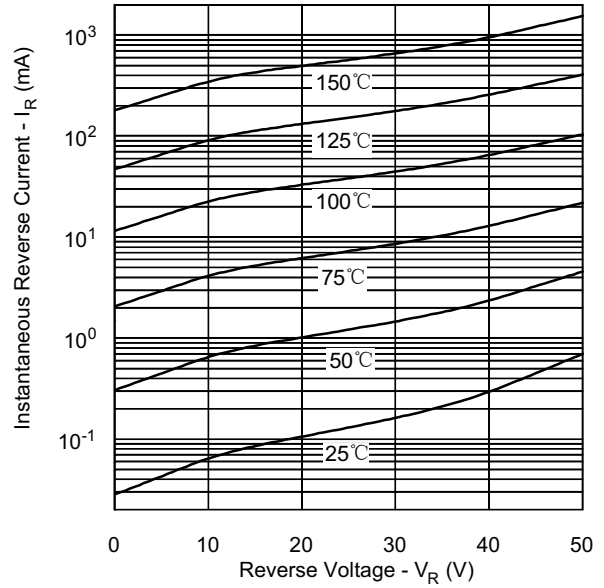

**Typical Junction Capacitance**

