

SPECIFICATIONS

Header Connector

Mechanical

Contact Retention Force: 0.20Kgf Min.

HL61 Series

Vertical, Straddle Mount ,
With Latch

Plug

2.00 [".079"] Pitch

Electrical

Voltage Rating: 125V

Current Rating: 2.0A Max. per pin

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 1000 MΩ Min.


Physical

Housing: Thermoplastic, UL 94V-0 rating in black color





Contact: Phosphor Bronze

Plating: See "ORDERING INFORMATION"

Operating Temperature: -40 to +85

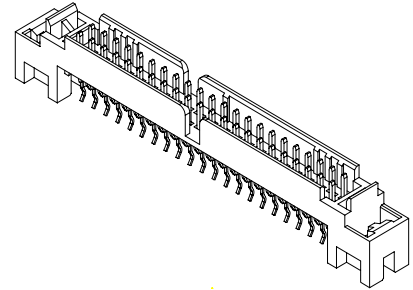

DRAWING

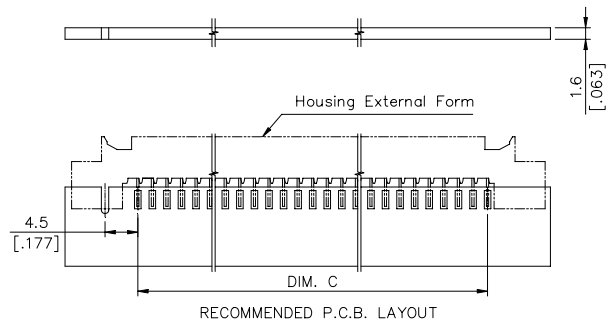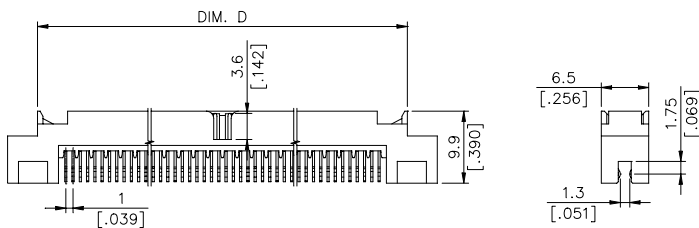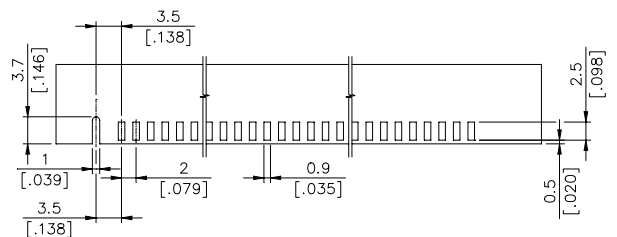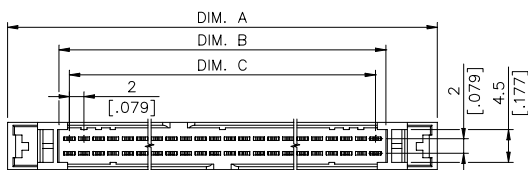

ORDERING INFORMATION

PRODUCT No. : H L 6 1 * * *

Header _____
 Shrouded Header _____
 Termination & Contact Type _____
 No. Of Single Row Pos. _____
 22=22/44 Pos.
 25=25/50 Pos.

Contact Area Plating
 F=Gold Flash
 With RoHS Compliance
 V=15u" Gold
 With RoHS Compliance
 H=30u" Gold
 With RoHS Compliance

HL6125*-**	25/50	65 [2.561]	50.85 [2.003]	48 [1.891]	56.65 [2.232]
HL6122*-**	22/44	59 [2.325]	44.85 [1.767]	42 [1.655]	50.65 [1.996]
P/N	POS.	DIM. A	DIM. B	DIM. C	DIM. D