
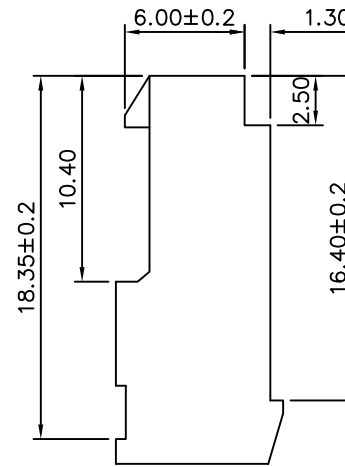
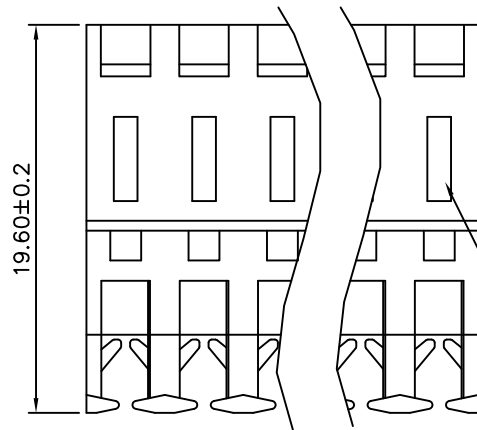


△ SPECIFICATIONS

Material: Nylon66,UL94V-2
 Contact Plating: Tin Plated
 Current Rating: 7A AC,DC
 Voltage Rating: 250V AC Max.
 Temperature Range: -40°C~+105°C
 Contact Resistance: Initial Value/10 Milliohms Max.
 After Environmental Testing/20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstand Voltage: 1500V AC/Minute
 Applicable Wire: AWG#18~#26
 Circuits: 2~25
 Mates With 1.14mm Pins
 Terminal Retention To Housing 8lbs(3.63Kg) Min.
 With Or Without Locking Ramp and Polarizing Rib
 Through and end Type

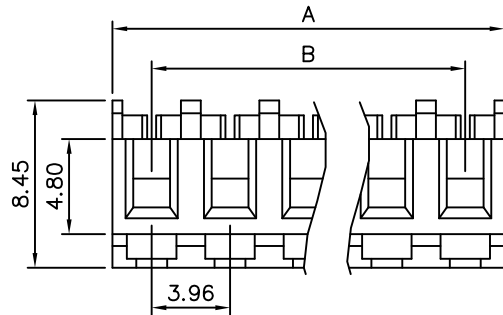

Wire Gauge
 △ 8: #18AWG
 0: #20AWG
 2: #22AWG
 4: #24AWG
 6: #26AWG

Circuits	A±0.20	B±0.20	Circuits	A±0.20	B±0.20
02	7.92	3.96	14	55.44	51.48
03	11.88	7.92	15	59.40	55.44
04	15.84	11.88	16	63.36	59.40
05	19.80	15.84	17	67.32	63.36
06	23.76	19.80	18	71.28	67.32
07	27.72	23.76	19	75.24	71.28
08	31.68	27.72	20	79.20	75.24
09	35.64	31.68	21	83.16	79.20
10	39.60	35.64	22	87.12	83.16
11	43.56	39.60	23	91.08	87.12
12	47.52	43.56	24	95.04	91.08
13	51.48	47.52	25	99.00	95.04



A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X. ±0.20 .X ±0.15 .XX ±0.10 ANG.
PART No. KTXXHXX		CHECKED BY BECKY		
DRAWING No. KTXXHXX		DRAWING BY TCF		
SCALE NONE	REV.	A2	UNIT mm	

△ A2	Modify Data	INGRID	01/29/2008
△ A1	Modify Spec. & Tolerance	SHIN	10/19/2006
△ A0	NEW RELEASE	BECKY	12/09/2004
NO. REV.	REVISIONS	CHK	DATE