


2.54mm PITCH SINGLE ROW SOCKET

LOW PROFILE P.C.B MOUNT STRAIGHT TYPE (PLASTIC HEIGHT: 6.00mm)

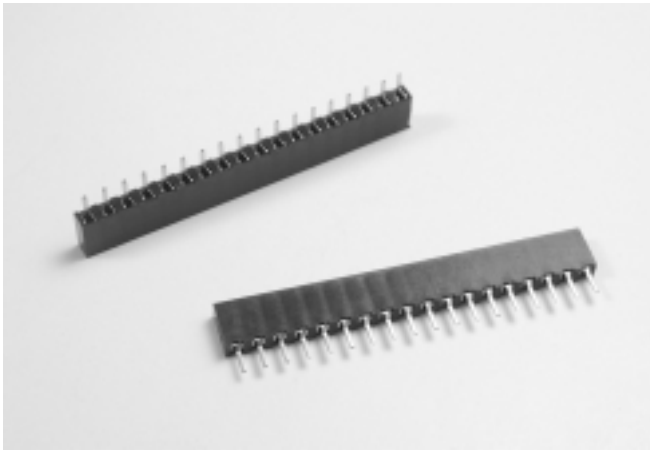


254250FS Series

Mates With SUYIN 254211, 254201 Series

Specifications:

- 2~40 Circuits
- Insulator Material : High Temp . Plastic
- Operating Temp. Range : -40°C To +105°C
- Terminal Material : Phosphor Bronze
- Plating : Gold Plated
- Max. Current Rating : 2.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V (Min. 60 Seconds)

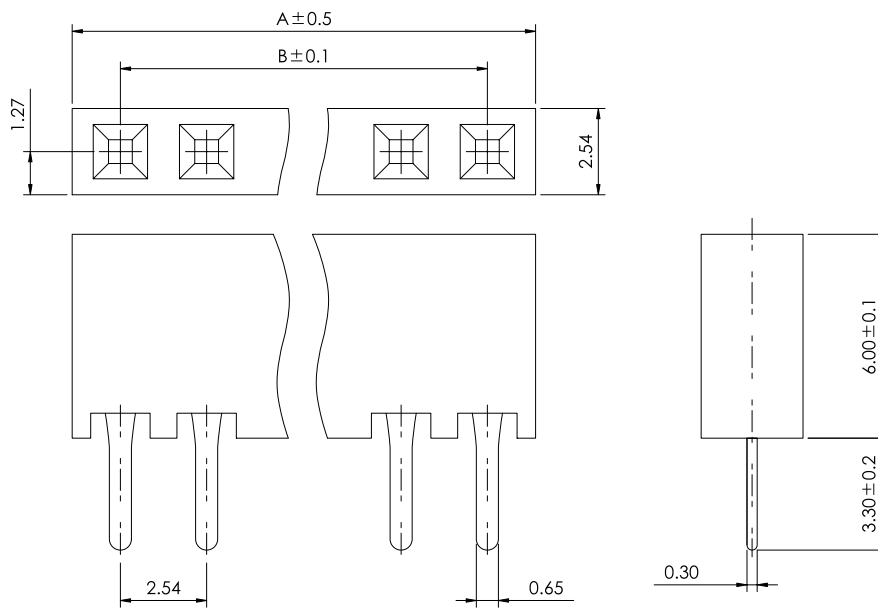

2.54
mm

Order Information


254250FS□□□□□00ZU
1 2 3 4 5

1. 'S': Straight DIP Type
2. No. of Pins
3. Plating
4. Color 'Z': Black
5. Package

'U': Tube Package Without CAP

Reference Page 11

Recommended P.C.B. Layout

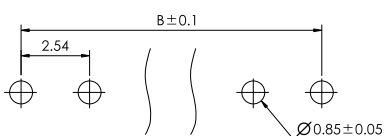

Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254250FS002□□□□00ZU	5.68	2.54	254250FS021□□□□00ZU	51.40	48.26
254250FS003□□□□00ZU	8.22	5.08	254250FS022□□□□00ZU	53.94	50.80
254250FS004□□□□00ZU	10.76	7.62	254250FS023□□□□00ZU	56.48	53.34
254250FS005□□□□00ZU	13.30	10.16	254250FS024□□□□00ZU	59.02	55.88
254250FS006□□□□00ZU	15.84	12.70	254250FS025□□□□00ZU	61.56	58.42
254250FS007□□□□00ZU	18.38	15.24	254250FS026□□□□00ZU	64.10	60.96
254250FS008□□□□00ZU	20.92	17.78	254250FS027□□□□00ZU	66.64	63.50
254250FS009□□□□00ZU	23.46	20.32	254250FS028□□□□00ZU	69.18	66.04
254250FS010□□□□00ZU	26.00	22.86	254250FS029□□□□00ZU	71.72	68.58
254250FS011□□□□00ZU	28.54	25.40	254250FS030□□□□00ZU	73.96	71.12
254250FS012□□□□00ZU	31.08	27.94	254250FS031□□□□00ZU	76.50	73.66
254250FS013□□□□00ZU	33.62	30.48	254250FS032□□□□00ZU	79.04	76.20
254250FS014□□□□00ZU	36.16	33.02	254250FS033□□□□00ZU	81.58	78.74
254250FS015□□□□00ZU	38.70	35.56	254250FS034□□□□00ZU	84.12	81.28
254250FS016□□□□00ZU	41.24	38.10	254250FS035□□□□00ZU	86.66	83.82
254250FS017□□□□00ZU	43.78	40.64	254250FS036□□□□00ZU	89.50	86.36
254250FS018□□□□00ZU	46.32	43.18	254250FS039□□□□00ZU	91.74	88.90
254250FS019□□□□00ZU	48.86	45.72	254250FS040□□□□00ZU	101.9	99.06