

SPECIFICATIONS

Mechanical

Contact Retention Force: 1.82kg (4.04Lb) min.
Contact Engagement Force: 0.34kg (0.75Lb) max.
Contact Separation Force: 0.021kg (0.05Lb) min.
Durability: 500 Cycles

Electrical


Current Rating: 2A
Contact Resistance: 25mW max.
Dielectric Withstanding Voltage: 1000V AC/1min min.
Insulation Resistance: 5000MW min.

Physical


Housing: Thermoplastic, UL 94V-0 rated in Blue 661C Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Operating Temperature: -55 to +105
Recommended Thickness of PCB: 1.57[.062]

VGA Connector

DV Series
Right Angle Type, T/H
2.29mm [.090"] Pitch
15 Pos.

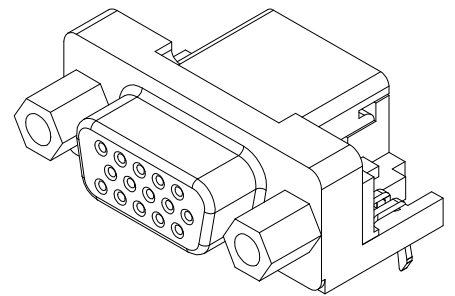

DRAWING

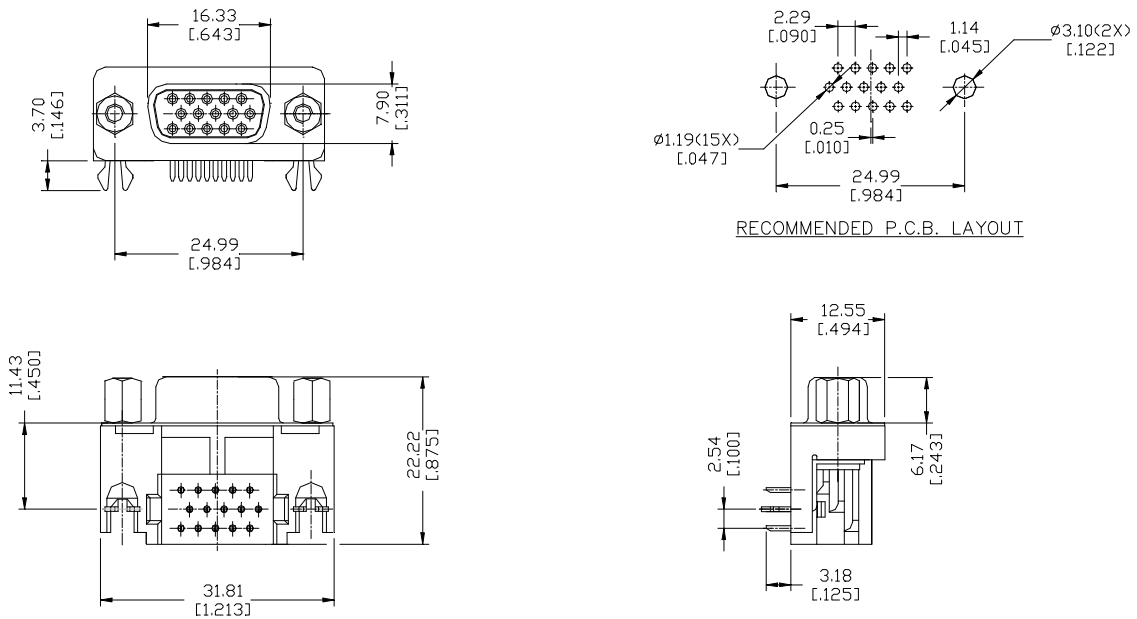

ORDERING INFORMATION

PRODUCT NO.: DV 1 1 2 0 3 - H5R5 - 4F

