




FLH SERIES

A-61-05-05

ORDERING INFORMATION



1. DESCRIPTION

FLH = Four Wall Latch Header

2. MOUNTING ANGLE

S = Straight

RA = Right Angle

3. POSITION

10, 12, 14, 16, 20, 24, 26,
30, 34, 40, 44, 50, 56, 60, 64

4. LATCHING OPTIONS

SL = Short Latch
(sockets w/out strain relief)LL = Long Latch
(sockets with strain relief)

NL = No Latches

5. PLATING

G = Gold over Nickel

T = Tin

FLH SERIES SPECIFICATIONS:


MATERIALS:

Contacts Copper Alloy
 Plating Gold over nickel or tin plated
 Insulator UL 94V-0 Glass Filled Polyester

ELECTRICAL:


Current Rating 3 Amps Max
 Voltage Rating 250 VAC RMS
 Contact Resistance 5 milliohms typ. 15 max.
 Operating Temperature -55 to + 125 C

FOUR WALL LATCH HEADER

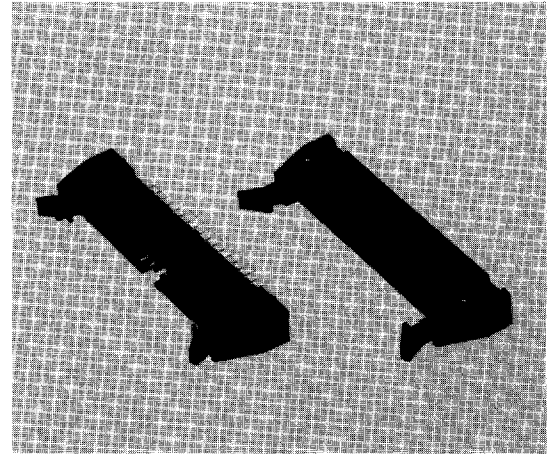

DIMENSIONAL DATA

All dimensions in (inches) and millimeters.

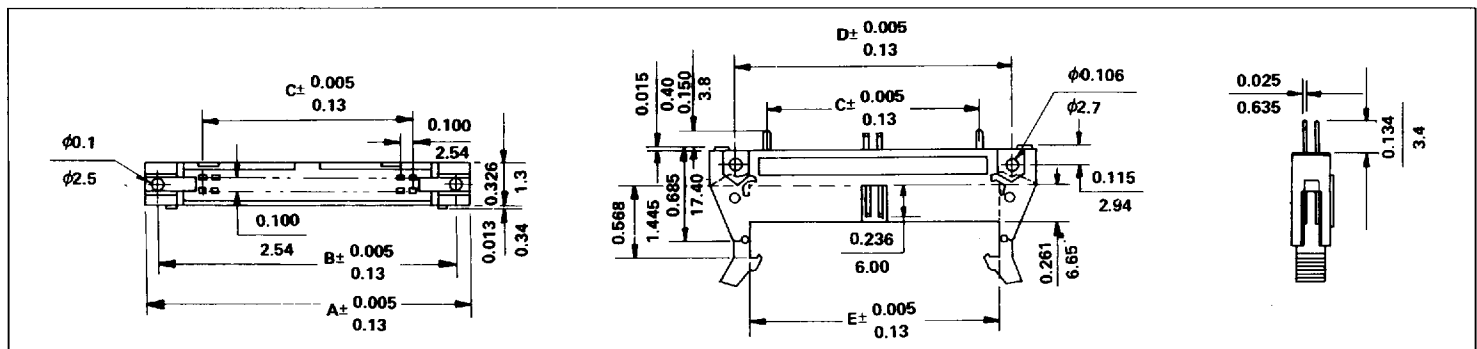

No. of Contact Pos.	A	B	C	D	E
10	32.00 (1.260)	27.94 (1.100)	10.16 (.400)	21.84 (.860)	17.52 (.690)
14	37.08 (1.460)	33.02 (1.300)	15.24 (.600)	26.92 (1.060)	22.60 (.890)
16	39.62 (1.560)	35.56 (1.400)	17.78 (.700)	29.46 (1.160)	25.14 (.990)
20	44.70 (1.760)	40.64 (1.600)	22.86 (.900)	34.54 (1.360)	30.22 (1.190)
26	52.32 (2.060)	48.26 (1.900)	30.48 (1.200)	42.16 (1.660)	37.84 (1.490)
30	57.40 (2.260)	53.34 (2.100)	35.56 (1.400)	47.24 (1.860)	42.92 (1.690)
34	62.48 (2.460)	58.42 (2.300)	40.64 (1.800)	52.32 (2.060)	48.00 (1.890)
40	70.10 (2.760)	66.04 (2.600)	48.26 (1.900)	59.94 (2.360)	55.62 (2.190)
50	82.80 (3.260)	78.74 (3.100)	60.96 (2.400)	72.64 (2.860)	68.32 (2.690)
60	96.50 (3.760)	91.44 (3.600)	73.66 (2.900)	85.34 (3.360)	81.02 (3.190)
64	100.58 (3.960)	96.52 (3.800)	78.74 (3.100)	90.45 (3.560)	86.10 (3.390)