



MMBT2907A

PNP GENERAL PURPOSE SWITCHING TRANSISTOR

VOLTAGE 60 Volts **POWER** 225 mW

FEATURES



- PNP epitaxial silicon, planar design
- Collector-emitter voltage $V_{CE} = -60V$
- Collector current $I_C = -600mA$

Š a A ^ ^ A & {] | ^ Á a O W U [P U Á C E C I D O Á a & a ^ Á
 Á O ! ^ ^ Á [| a a * & {] | ^ } á a Á ^ ! Á O Ô I F G J Á U á Á P a | * ^ } Á O ^ Á D

MECHANICAL DATA

- Case: SOT-23
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx Weight: 0.0081 grams
- Device Marking : M7A

SOT-23 Unit : inch(mm)

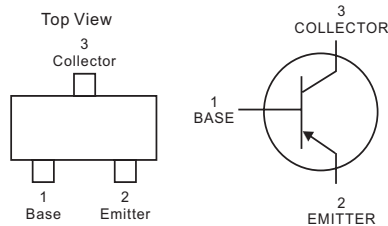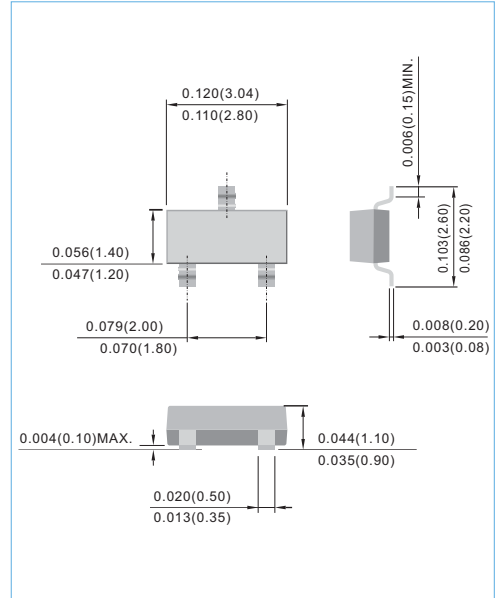

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Units
Collector-Emitter Voltage	V_{CEO}	-60	V
Collector-Base Voltage	V_{CBO}	-60	V
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-600	mA

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Max Power Dissipation (Note 1)	P_{TOT}	225	mW
Storage Temperature	T_{STG}	-55 to 150	°C
Junction Temperature	T_J	-55 to 150	°C
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	°C / W

Note 1 : Transistor mounted on FR-4 board 70 x 60 x 1mm.



MMBT2907A

ELECTRICAL CHARACTERISTICS (T_J=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Collector-Emitter Breakdown Voltage	V _(BR) CEO	I _C =-10mA, I _B =0	-60	-	-	V
Collector-Base Breakdown Voltage	V _(BR) CBO	I _C =-10μA, I _E =0	-60	-	-	V
Emitter-Base Breakdown Voltage	V _(BR) EBO	I _E =-10μA, I _C =0	-5.0	-	-	V
Base Cutoff Current	I _{BL}	V _{CE} =-30V, V _{EB} =-0.5V	-	-	-50	nA
Collector Cutoff Current	I _{CEX}	V _{CE} =-30V, V _{EB} =-0.5V	-	-	-50	nA
	I _{CBO}	V _{CE} =-50V, I _E =0	-	-	-10	nA
		V _{CE} =-50V, I _E =0 T _J =125°C	-	-	-10	μA
DC Current Gain	h _{FE}	I _C =-0.1mA, V _{CE} =-10V I _C =-1.0mA, V _{CE} =-10V I _C =-10mA, V _{CE} =-10V I _C =-150mA, V _{CE} =-10V I _C =-500mA, V _{CE} =-10V	75 100 100 100 50	- - - - -	- - - 300 -	-
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	I _C =-150mA, I _B =-15mA I _C =-500mA, I _B =-50mA	- -	- -	-0.4 -1.6	V
Base-Emitter Saturation Voltage	V _{BE(SAT)}	I _C =-150mA, I _B =-15mA I _C =-500mA, I _B =-50mA	- -	- -	-1.3 -2.6	V
Collector-Base Capacitance	C _{CB0}	V _{CB} =-10V, I _E =0, f=1MHz	-	-	8.0	pF
Emitter-Base Capacitance	C _{EBO}	V _{CB} =-2V, I _C =0, f=1MHz	-	-	30	pF
Current Gain-Bandwidth Product	F _T	I _C =-50mA, V _{CE} =-20V, f=100MHz	200	-	-	MHz
Turn-On Time	t _{on}	V _{CC} =-30V, V _{BE} =-0.5V, I _C =-150mA, I _B =-15mA	-	-	45	ns
Delay Time	t _d	V _{CC} =-30V, V _{BE} =-0.5V, I _C =-150mA, I _B =-15mA	-	-	10	ns
Rise Time	t _r	V _{CC} =-30V, V _{BE} =-0.5V, I _C =-150mA, I _{B1} =-15mA	-	-	40	ns
Turn-Off Time	t _{off}	V _{CC} =-6V, I _C =-150mA, I _{B1} =I _{B2} =-15mA	-	-	100	ns
Storage Time	t _s	V _{CC} =-6V, I _C =-150mA, I _{B1} =I _{B2} =-15mA	-	-	80	ns
Fall Time	t _f	V _{CC} =-6V, I _C =-150mA, I _{B1} =I _{B2} =-15mA	-	-	30	ns



MMBT2907A

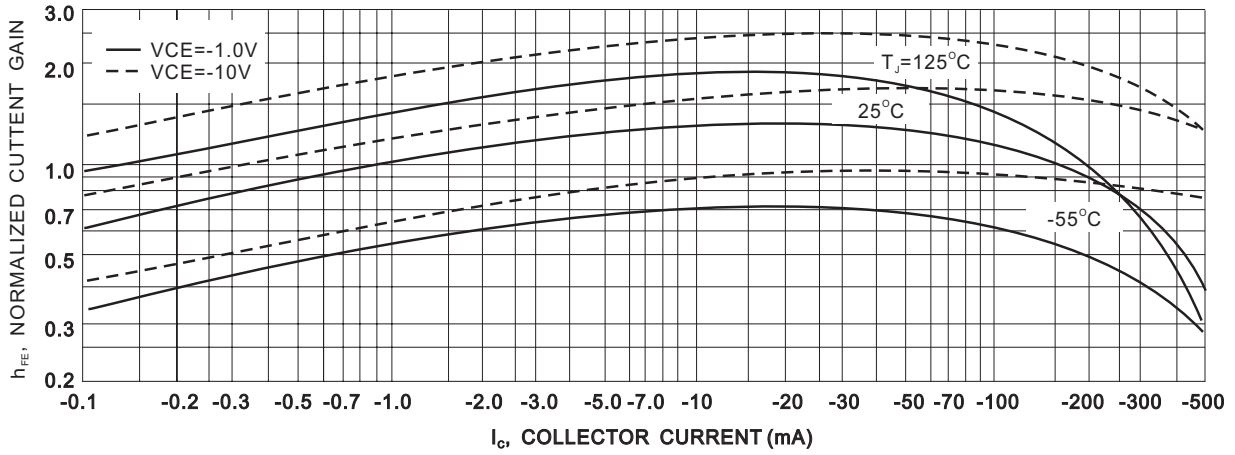


Fig.1-DC Current Gain

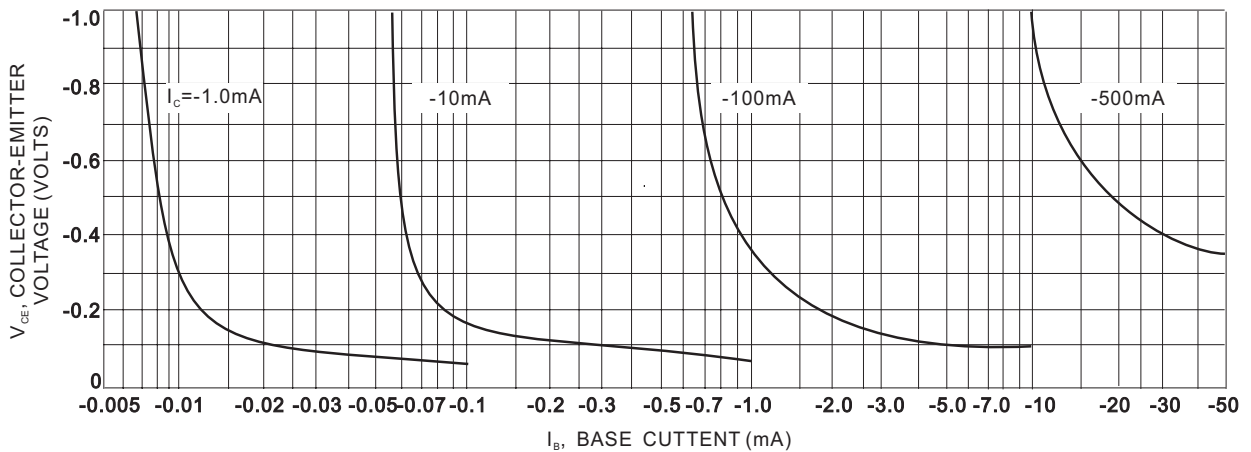


Fig.2-Collector Saturation Region

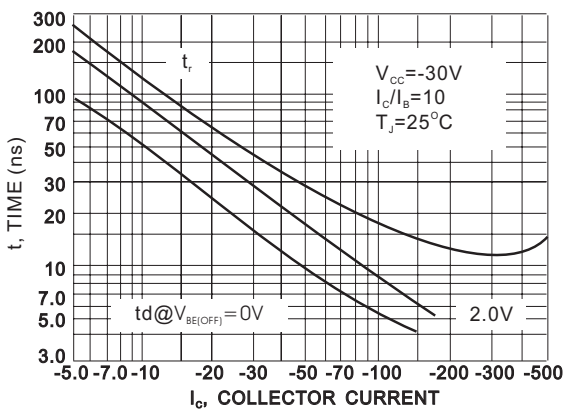


Fig.3-Turn-On Time

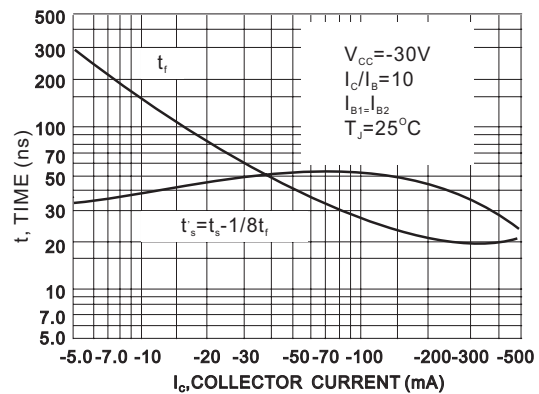


Fig.4-Turn-Off Time



MMBT2907A

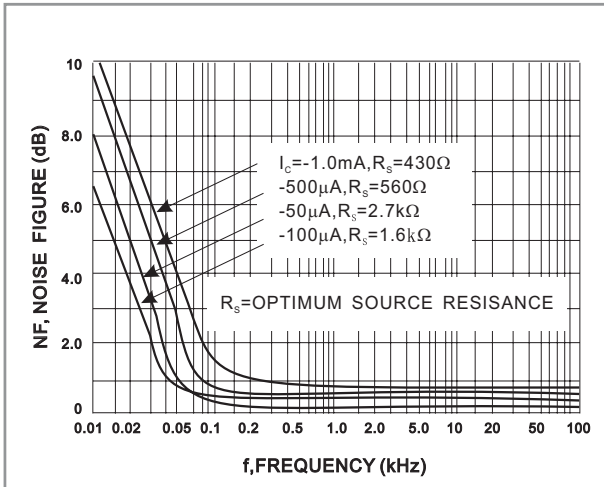


Fig.5-Frequency Effects

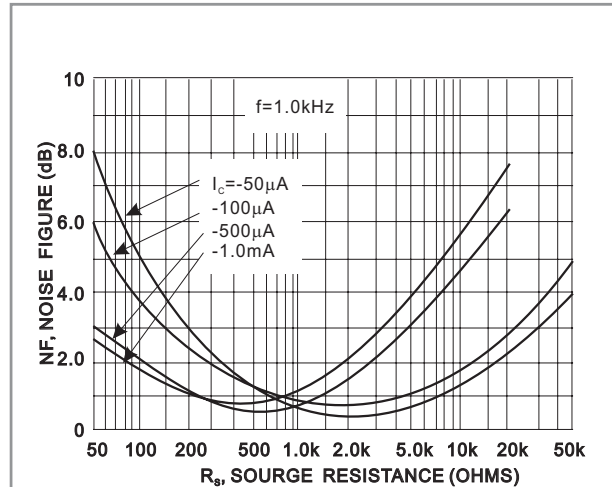


Fig.6-Source Resistance Effects

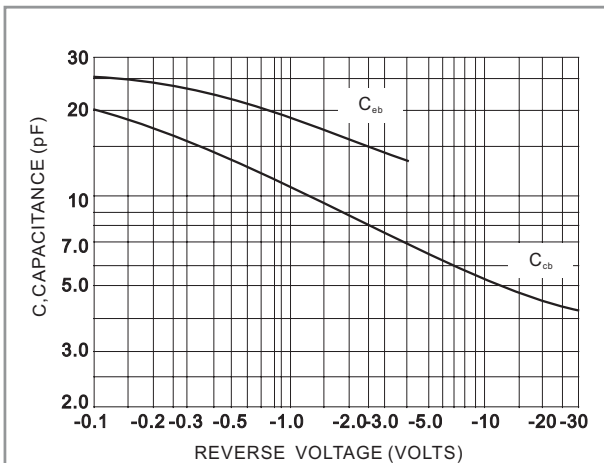


Fig.7-Capacitances

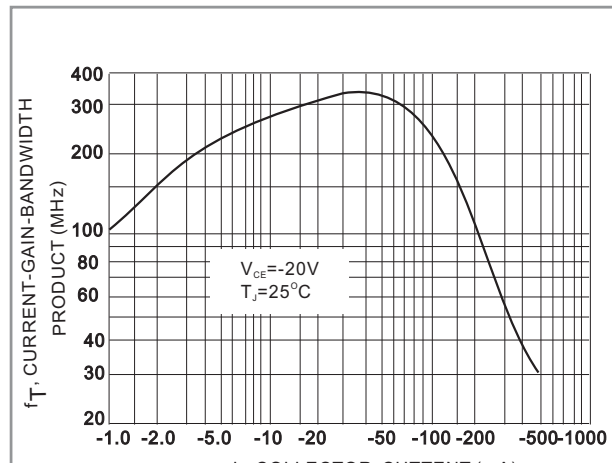


Fig.8-Current-Gain-Bandwidth Product

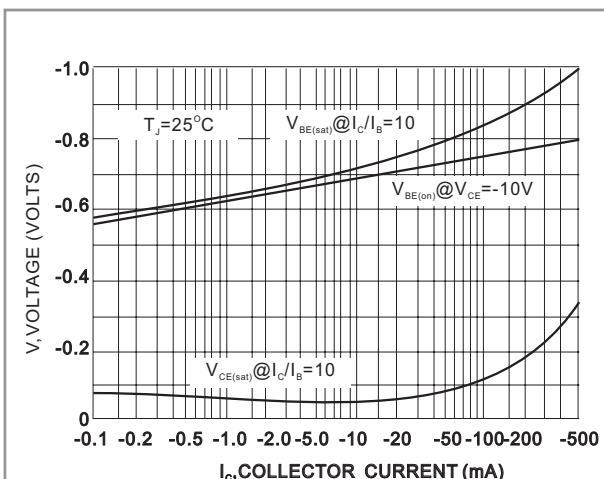


Fig.9-On Voltage


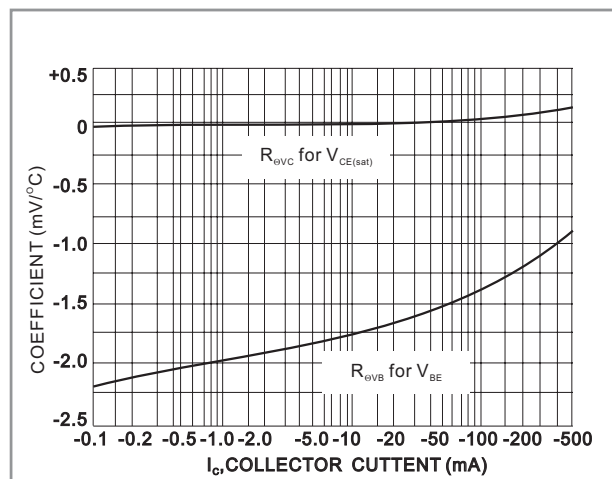


Fig.10-Temperature Coefficients



MMBT2907A

MOUNTING PAD LAYOUT

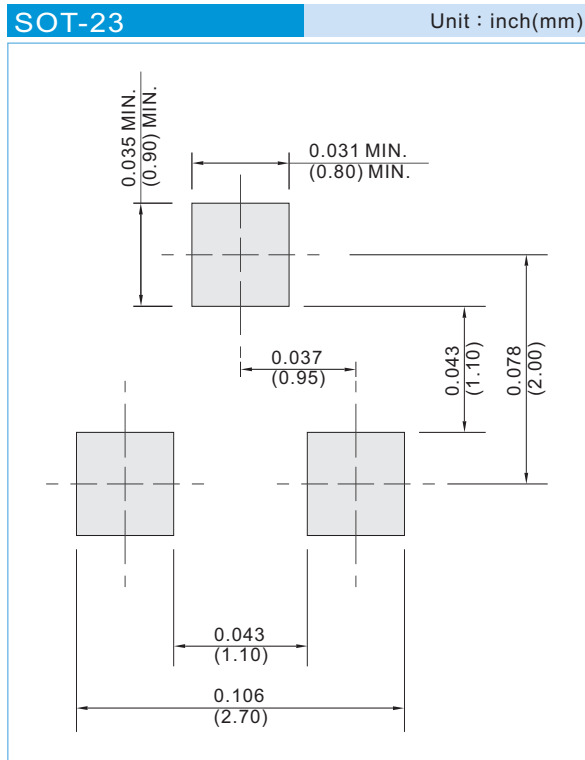

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2012

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.




MMBT2907A

Part No_packing code_Version

For example :

RB500V-40_R2_00000

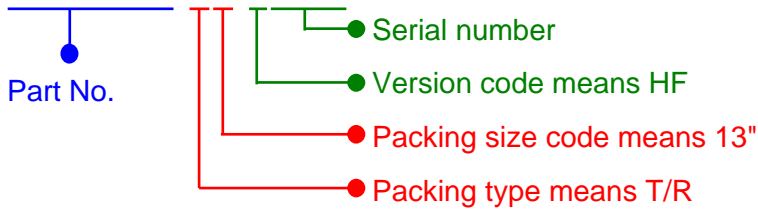

Packing Code XX				Version Code XXXXX		
Packing type	1st Code	Packing size code	2nd Code	HF or RoHS	1st Code	2nd~5th Code
T/B	A	N/A	0	HF	0	serial number
T/R	R	7"	1	RoHS	1	serial number
B/P	B	13"	2			
T/P	T	26mm	X			
TRR	S	52mm	Y			
TRL	L	PBCU	U			
FORMING	F	PBCD	D			