



# HARRIS

# HA-2730/35

## Wide Range Dual Programmable Operational Amplifier

**Not Recommended  
For New Designs  
See HA-5142**

HA-2730/35

2  
OP AMP COMP  
CONTROL FUNCT.

FEATURES	
• WIDE PROGRAMMING RANGE	
SET CURRENT	0.1 TO 100 $\mu$ A
SLEW RATE	0.06 TO 6V/ $\mu$ s
BANDWIDTH	5kHz TO 10MHz
BIAS CURRENT	0.4 TO 50nA
SUPPLY CURRENT	1 $\mu$ A TO 1.5mA
• WIDE POWER SUPPLY RANGE	$\pm$ 1.2 TO $\pm$ 18V
• CONSTANT AC PERFORMANCE OVER SUPPLY RANGE	

**DESCRIPTION**


HA-2730/2735 Dual Programmable Amplifiers are internally compensated monolithic devices offering a wide range of performance, that can be controlled by adjusting the circuits' "set" current (I<sub>SET</sub>). By means of adjusting an external resistor or current source, power dissipation, slew rate, bandwidth, output current and input noise can be programmed to desired levels. Each amplifier on the chip can be adjusted independently. This versatile adjustment capability enables HA-2730/2735 to provide optimum design solutions by delivering the required level of performance with minimum possible power dissipation. HA-2730/2735 can, therefore, be utilized as the standard amplifier for a variety of designs simply by adjusting their programming current.

A major advantage of HA-2730/2735 is that operating characteristics remain virtually constant over a wide supply range ( $\pm$ 1.2V to  $\pm$ 15V), allowing the amplifiers to offer maximum performance in almost any system including battery-operated equipment. A primary application for HA-2730/2735 is in active filters for a wide variety of signals that differ in frequency and amplitude. Also, by modulating the "set" current, HA-2730/2735 can be used for designs such as current controlled oscillators, modulators, sample and hold circuits and variable active filters.

HA-2730 is guaranteed over -55 $^{\circ}$ C to +125 $^{\circ}$ C. HA-2735 is specified from 0 $^{\circ}$ C to +75 $^{\circ}$ C. Both parts are available in 14 lead D.I.P. package or dice form.


- APPLICATIONS**
- ACTIVE FILTERS
  - CURRENT CONTROLLED OSCILLATORS
  - VARIABLE ACTIVE FILTERS
  - MODULATORS
  - BATTERY-POWERED EQUIPMENT

### PINOUT

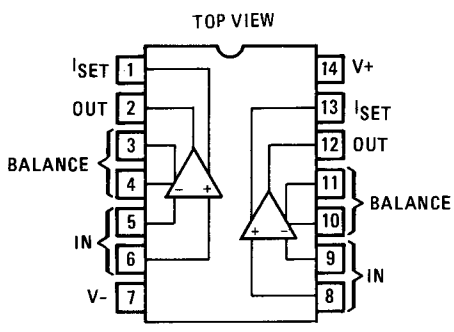

NOTE: Bottom of package is connected to V-.

### SCHEMATIC

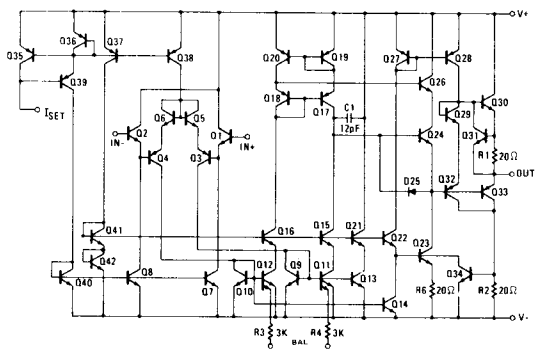

(ONE HALF ONLY)  
HA-2730/35

# SPECIFICATIONS

## ABSOLUTE MAXIMUM RATINGS

Voltage Between V+ and V- Terminals	45.0V	Power Dissipation (Note 2)	500mW
Differential Input Voltage	±30.0V	Operating Temperature Range:	
Input Voltage (Note 1)	±15.0V	HA-2730	-55°C ≤ T <sub>A</sub> ≤ +125°C
I <sub>SET</sub> (Current at I <sub>SET</sub> )	500μA	HA-2735	0°C ≤ T <sub>A</sub> ≤ +75°C
V <sub>SET</sub> (Voltage to Gnd. at I <sub>SET</sub> )	V+ - 2.0V ≤ V <sub>SET</sub> ≤ V+	Storage Temperature Range	-65°C ≤ T <sub>A</sub> ≤ +150°C

## ELECTRICAL CHARACTERISTICS (Each Side) V+ = +3.0V, V- = -3.0V

PARAMETER	TEMP.	HA-2730 -55°C to +125°C						HA-2735 0°C to +75°C						UNITS
		I <sub>SET</sub> = 1.5μA			I <sub>SET</sub> = 15μA			I <sub>SET</sub> = 1.5μA			I <sub>SET</sub> = 15μA			
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
<b>INPUT CHARACTERISTICS</b>														
Offset Voltage	25°C Full		2.0	3.0 5.0		2.0	3.0 5.0		2.0	5.0 7.0		2.0	5.0 7.0	mV mV
Offset Current	25°C Full		0.5	3.0 7.5		1.0	10 20		0.5	5.0 7.5		1.0	10 20	nA nA
Bias Current	25°C Full		2.0	5.0 10		8.0	20 40		2.0	10 10		8.0	30 40	nA nA
Input Resistance (Note 10)	25°C			50		5			50			5		MΩ
Input Capacitance	25°C			3.0		3.0			3.0			3.0		pF
<b>TRANSFER CHARACTERISTICS</b>														
Large Signal Voltage Gain (Notes 3 & 9)	25°C Full	15K 10K	40K		15K 10K	40K		15K 10K	40K		15K 10K	40K		V/V V/V
Common Mode Rejection Ratio (Note 4)	Full	30			80			74			74			dB
<b>OUTPUT CHARACTERISTICS</b>														
Output Voltage Swing (Note 3)	25°C Full	±2.0 ±2.0	±2.2		±2.0 ±2.0	±2.2		±2.0 ±2.0	±2.2		±2.0 ±2.0	±2.2		V V
Output Current (Note 5)	25°C		±0.2		±0.2			±0.2			±0.2			mA
Output Resistance	25°C		2K		500			2K			500			Ω
Output Short-Circuit Current	25°C		2.8		14			2.8			14			mA
<b>TRANSIENT RESPONSE</b>														
Rise Time (Note 6)	25°C		2.5		0.25			2.5			0.25			μs
Overshoot (Note 6)	25°C		5		10			5			10			%
Slew Rate (Note 7)	25°C		0.07		0.70			0.07			0.70			V/μs
<b>POWER SUPPLY CHARACTERISTICS</b>														
Supply Current	25°C Full		15	25		170	250		15	25		170	250	μA μA
Power Supply Rejection Ratio (Note 8)	Full	80			80			76			76			dB

# SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS (Each Side) $V_+ = +15.0V$ , $V_- = -15.0V$

HA-2730/35

2  
OP AMP COMP.  
CONTROL FUNCT.

PARAMETER	TEMP.	HA-2730 -55°C to +125°C						HA-2735 0°C to +75°C						UNITS
		I <sub>SET</sub> = 1.5μA			I <sub>SET</sub> = 15μA			I <sub>SET</sub> = 1.5μA			I <sub>SET</sub> = 15μA			
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
<b>INPUT CHARACTERISTICS</b>														
Offset Voltage	25°C		2.0	3.0		2.0	3.0		2.0	5.0		2.0	5.0	mV
	Full			5.0			5.0			7.0			7.0	mV
Offset Current	25°C		0.5	3.0		1.0	10		0.5	5.0		1.0	10	nA
	Full			7.5			20			7.5			20	nA
Bias Current	25°C		2.0	5.0		8.0	20		2.0	10		8.0	30	nA
	Full			10			40			10			40	nA
Input Resistance (Note 10)	25°C		50			5			50			5		MΩ
Input Capacitance	25°C		3.0			3.0			3.0			3.0		pF
<b>TRANSFER CHARACTERISTICS</b>														
Large Signal Voltage Gain (Notes 3 & 9)	25°C	30K	100K		30K	120K		25K	40K		25K	120K		V/V
	Full	20K			20K			20K			20K			V/V
Common Mode Rejection Ratio (Note 4)	25°C		90		90		90		90		90		90	dB
	Full	80			80		74		74		74		74	dB
<b>OUTPUT CHARACTERISTICS</b>														
Output Voltage Swing (Note 3)	25°C	±12	±13.5		±12	±13.5		±12	±13.5		±12	±13.5		V
	Full	±10			±10			±10			±10			V
Output Current (Note 5)	25°C		±0.5		±0.5		±0.5		±0.5		±0.5		±0.5	mA
Output Resistance	25°C		2K		500		2K		500		2K		500	Ω
Output Short-Circuit Current	25°C		3.7		19		3.7		19		3.7		19	mA
<b>TRANSIENT RESPONSE</b>														
Rise Time (Note 6)	25°C		2.0		0.2		2.0		0.2		2.0		0.2	μs
Overshoot (Note 6)	25°C		5		15		5		15		5		15	%
Slew Rate (Note 7)	25°C		0.1		0.8		0.1		0.8		0.1		0.8	V/μs
<b>POWER SUPPLY CHARACTERISTICS</b>														
Supply Current	25°C		20		210		20		210		20		210	μA
	Full		50		450		50		450		50		450	μA
Power Supply Rejection Ratio (Note 8)	Full	80			80		76		76		76		76	dB

- NOTES: 1. For supply voltages less than ±15.0V, the absolute maximum input voltage is equal to supply voltage.  
2. Derate at 4.7mW/°C at ambient temperatures above 68°C.

$$3. T = +25^{\circ}\text{C and Full} \quad \begin{array}{l} V_{\text{SUPPLY}} = \pm 3.0\text{V} \\ V_{\text{SUPPLY}} = \pm 15.0\text{V} \end{array} \quad \begin{array}{l} T = +25^{\circ}\text{C} \\ T = \text{Full} \end{array} \quad \begin{array}{l} I_{\text{SET}} = 1.5\mu\text{A} \\ R_L = 75\text{K}\Omega \\ R_L = 75\text{K}\Omega \end{array} \quad \begin{array}{l} I_{\text{SET}} = 15\mu\text{A} \\ R_L = 5\text{K}\Omega \\ R_L = 75\text{K}\Omega \end{array}$$

$$4. V_{\text{CM}} = \pm 1.5\text{V} \quad V_{\text{CM}} = \pm 5.0\text{V}$$

$$5. V_{\text{O}} = \pm 2.0\text{V} \quad V_{\text{O}} = \pm 10.0\text{V}$$

$$6. \leftarrow A_V = +1, V_{\text{IN}} = 400\text{mV}, R_L = 5\text{K}, C_L = 100\text{pF} \rightarrow R_L = 20\text{K} \quad R_L = 5\text{K}$$

$$7. V_{\text{O}} = \pm 2.0\text{V} \quad V_{\text{O}} = \pm 10.0\text{V}$$

$$8. \Delta V = \pm 1.5\text{V} \quad \Delta V = \pm 5.0\text{V}$$


$$9. V_{\text{O}} = \pm 1.0\text{V} \quad V_{\text{O}} = \pm 10.0\text{V}$$

10. This parameter value based upon design calculations.


# PERFORMANCE CURVES

UNLESS OTHERWISE NOTED:  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 15\text{VDC}$


INPUT BIAS CURRENT  
vs. SET CURRENT




INPUT BIAS CURRENT  
vs. TEMPERATURE




INPUT OFFSET CURRENT  
vs. TEMPERATURE

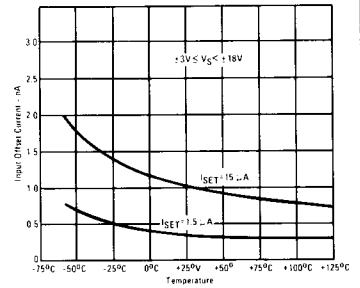


CHANGE IN OFFSET VOLTAGE  
vs.  $I_{SET}$  (UNNULLED)




INPUT NOISE CURRENT  
vs.  $I_{SET}$




INPUT NOISE VOLTAGE  
vs.  $I_{SET}$



INPUT NOISE VOLTAGE AND CURRENT  
vs. FREQUENCY




OPTIMUM SET CURRENT FOR MINIMUM  
NOISE vs. SOURCE RESISTOR




# PERFORMANCE CURVES

UNLESS OTHERWISE NOTED:  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 15\text{VDC}$


MAXIMUM OUTPUT VOLTAGE SWING  
vs. LOAD RESISTANCE




GAIN BANDWIDTH PRODUCT  
vs. ISET




OPEN LOOP VOLTAGE GAIN  
vs. TEMPERATURE




OPEN LOOP VOLTAGE GAIN  
vs. ISET




POWER SUPPLY REJECTION  
vs. ISET




STANDBY SUPPLY CURRENT  
vs. ISET



SUPPLY CURRENT vs.  
TEMPERATURE




NORMALIZED BANDWIDTH  
vs. TEMPERATURE




# PERFORMANCE CURVES


SLEW RATE vs. I<sub>SET</sub>




PHASE MARGIN vs. SET CURRENT




CHANNEL SEPARATION vs. FREQUENCY

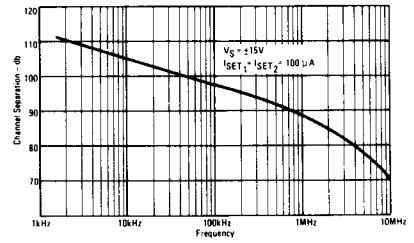


## TYPICAL BIASING CIRCUITS

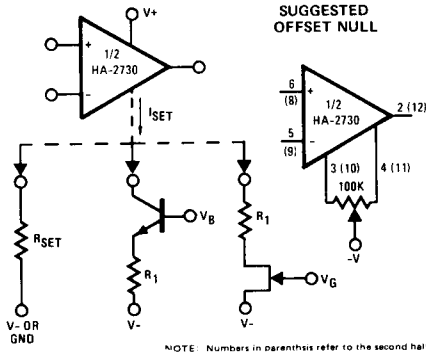

## SET CURRENT VS. SET RESISTOR



## TRANSIENT RESPONSE/SLEW RATE CIRCUIT

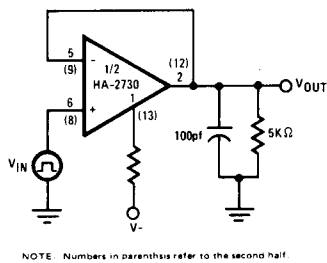

## SLEWING WAVEFORM

