


# .100" (2.54mm) HEADER ASSEMBLIES

## SPECIFICATION



- \* Current Rating:  
5 A
- \* Withstanding Voltage:  
500 VAC ( 1 min.)
- \* Insulation Resistance:  
1000 MΩ min.
- \* Contact Resistance:  
20 mΩ max.
- \* Operating Temperature:  
-40°C to +85°C

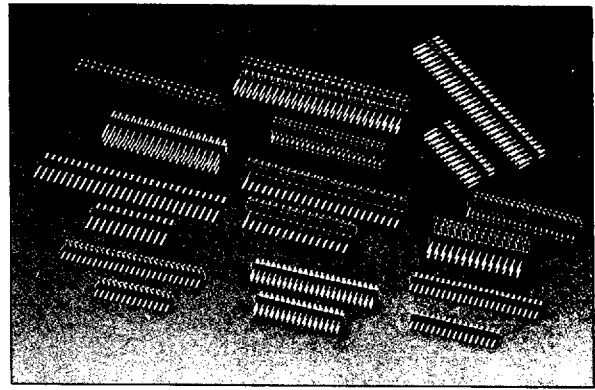

## MATERIAL

- \* Contact: Brass ,  
0.64mm square post
- \* Insulator: PBT & 30% G. F.
- \* Plating: Gold or Tin

## ORDER INFORMATION

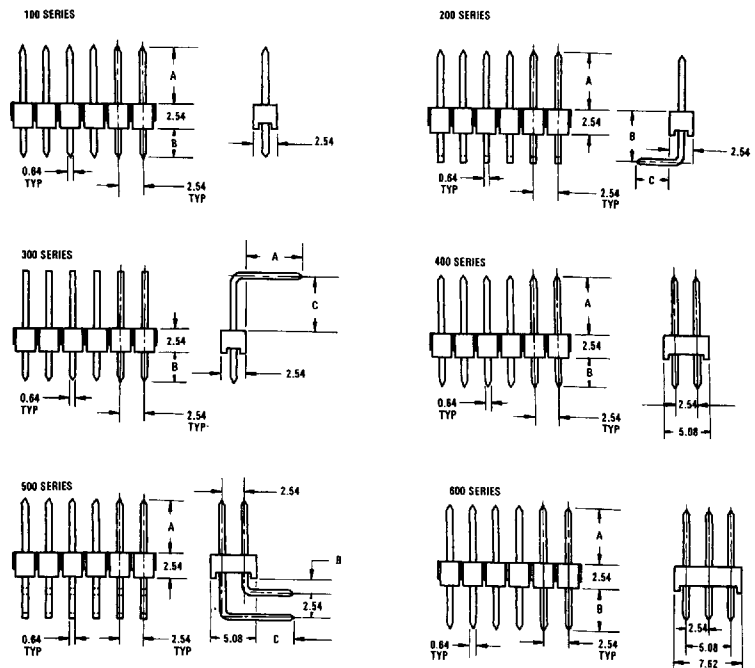

SERIES	POS	A	B	C
101	2- 40	6.00	3.00	—
201	2- 40	7.00	4.08	3.50
301	2- 40	6.00	3.00	4.08
401	4- 80	6.00	3.00	—
501	4- 80	6.00	1.52	3.00
601	3- 120	6.00	3.00	—

Specifications are subject to change without notice