
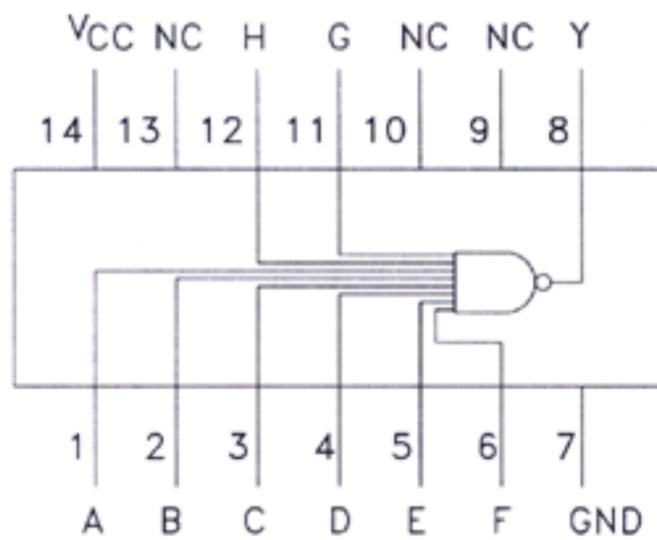


### 8-Input NAND Gate

This device contains a single gate, which performs the logic NAND function.

- AVG's LS operates over extended Vcc from 4.5 to 5.5 V
- AVG's LS and ALS both have guaranteed DC and AC specification over full temperature and Vcc range
- Switching specifications for ALS at 50 pF
- AVG's ALS has the lowest speed power product (4pJ per gate typical) of all logic series

**DV74LS30**  
**DV74ALS30A**

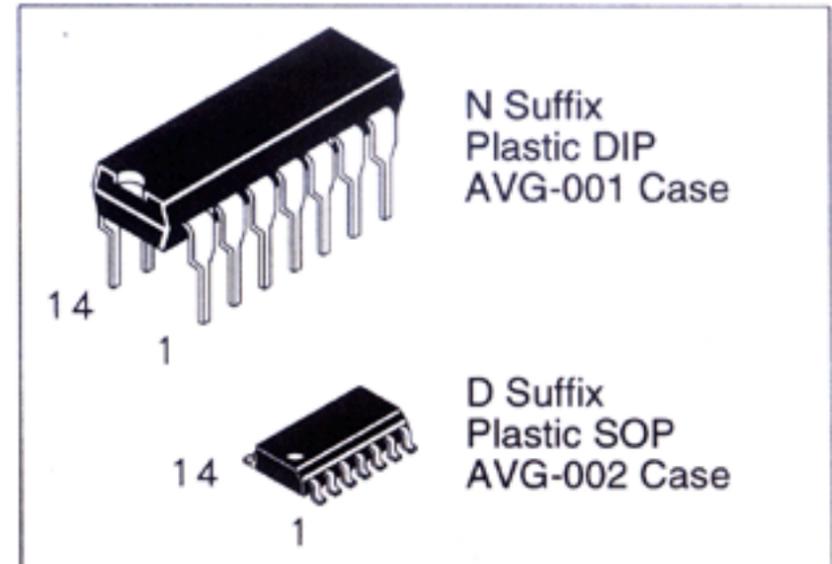

NC = No Connection

#### TRUTH TABLE

Inputs A through K	Output Y
All Inputs H	L
One or more inputs L	H

H = High Level Logic  
L = Low Level Logic

#### ABSOLUTE MAXIMUM RATINGS

Maximum ratings are those values beyond which damage to the device may occur.

Symbol	Parameter	LS30	ALS30A	Unit
V <sub>CC</sub>	Supply Voltage	7.0	7.0	V
V <sub>IN</sub>	Input Voltage	7.0	7.0	V
T <sub>STG</sub>	Storage Temperature Range	-65 to +150	-65 to + 150	°C

#### GUARANTEED OPERATING CONDITIONS

Symbol	Parameter	LS30		ALS30A		Unit
		Min	Max	Min	Max	
V <sub>CC</sub>	Supply Voltage	4.5	5.5	4.5	5.5	V
V <sub>IH</sub>	High Level Input Voltage	2.0		2.0		V
V <sub>IL</sub>	Low Level Input Voltage		0.8		0.8	V
I <sub>OH</sub>	High Level Output Current		-0.4		-0.4	mA
I <sub>OL</sub>	Low Level Output Current		8.0		8.0	mA
T <sub>A</sub>	Ambient Temperature Range	-10 to +70		-10 to + 70		°C

## DC ELECTRICAL CHARACTERISTICS over full operating conditions

Symbol	Parameter	Conditions	LS30			ALS30A			Unit
			Min	Typ	Max	Min	Typ	Max	
$V_{IK}$	Input Clamp Voltage	$V_{CC} = \text{min}, I_{IN} = -18 \text{ mA}$			-1.5			-1.5	V
$V_{OH}$	High Level Output Voltage	$V_{CC} = \text{min}, I_{OH} = \text{max}$	$V_{CC} - 2$	3.5		$V_{CC} - 2$			V
$V_{OL}$	Low Level Output Voltage	$V_{CC} = \text{min}; I_{OL} = 4 \text{ mA}$ $V_{CC} = \text{min}; I_{OL} = 8 \text{ mA}$		0.25 0.35	0.4 0.5		0.25 0.35	0.4 0.5	V
$I_{IH}$	High Level Input Current	$V_{CC} = \text{max}, V_{IN} = 2.7 \text{ V}$ $V_{CC} = \text{max}, V_{IN} = 7 \text{ V}$			20 0.1			20 0.1	$\mu\text{A}$ mA
$I_{IL}$	Low Level Input Current	$V_{CC} = \text{max}, V_{IN} = 0.4 \text{ V}$			-0.4			-0.1	mA
$I_O$	Short Circuit Current	$V_{CC} = \text{max}, V_O = 2.25 \text{ V}$	-20		-110	-30		-112	mA
$I_{CC}$	Supply Current Outputs High Outputs Low	$V_{CC} = \text{max}$			0.5 1.1		0.22 0.54	0.36 0.9	mA mA

## SWITCHING CHARACTERISTICS over full operating conditions

Symbol	Parameter	LS30 $C_L = 15 \text{ pF}$		ALS30A $C_L = 50 \text{ pF}$ $R_L = 500 \Omega$		Unit
		Min	Max	Min	Max	
$t_{PLH}$	Turn Off Delay, Input to Output		15	3	10	ns
$t_{PHL}$	Turn On Delay, Input to Output		20	3	12	ns

## SWITCHING WAVEFORMS

