

**LM158, LM258, LM358
LM258A, LM358A, LM2904
DUAL OPERATIONAL AMPLIFIERS**

D2231, JUNE 1976—REVISED AUGUST 1988


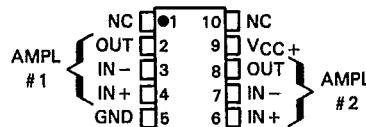
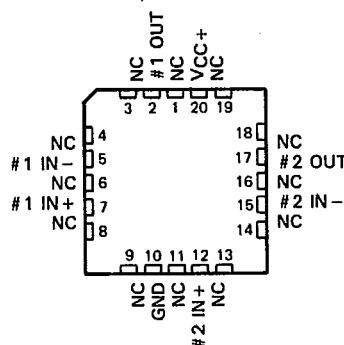
- Wide Range of Supply Voltages:
Single Supply . . . 3 V to 30 V
(LM2904 . . . 3 V to 26 V),
or Dual Supplies
- Low Supply Current Drain Independent of Supply Voltage . . . 0.7 mA Typ
- Common-Mode Input Voltage Range Includes Ground Allowing Direct Sensing near Ground
- Low Input Bias and Offset Parameters:
Input Offset Voltage . . . 3 mV Typ
A Versions . . . 2 mV Typ
Input Offset Current . . . 2 nA Typ
Input Bias Current . . . 20 nA Typ
A Versions . . . 15 nA Typ
- Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . ± 32 V
(± 26 V for LM2904)
- Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ
- Internal Frequency Compensation

description


These devices consist of two independent, high-gain, frequency-compensated operational amplifiers that were designed specifically to operate from a single supply over a wide range of voltages. Operation from split supplies is also possible so long as the difference between the two supplies is 3 V to 30 V (3 V to 26 V for the LM2904), and the VCC pin is at least 1.5 V more positive than the input common-mode voltage. The low supply current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, d-c amplification blocks, and all the conventional operational amplifier circuits that now can be more easily implemented in single-supply-voltage systems. For example, these devices can be operated directly off of the standard 5-V supply that is used in digital systems and will easily provide the required interface electronics without requiring additional ± 15 -V supplies.

The LM158 is characterized for operation over the full military temperature range of -55°C to 125°C . The LM258 and LM258A are characterized for operation from -25°C to 85°C , the LM358 and LM358A from 0°C to 70°C , and the LM2904 from -40°C to 105°C .

D, JG, OR P PACKAGE
(TOP VIEW) T-79-05-2DU FLAT PACKAGE
(TOP VIEW)LM 158
FK CHIP CARRIER PACKAGE
(TOP VIEW)

NC—No internal connection

schematic (each amplifier)

2

Operational Amplifiers

PRODUCTION DATA documents contain information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

Copyright © 1979, Texas Instruments Incorporated

LM158, LM258, LM358, LM258A, LM358A, LM2904
DUAL OPERATIONAL AMPLIFIERS

TEXAS INSTR (LIN/INTFC)

18E D

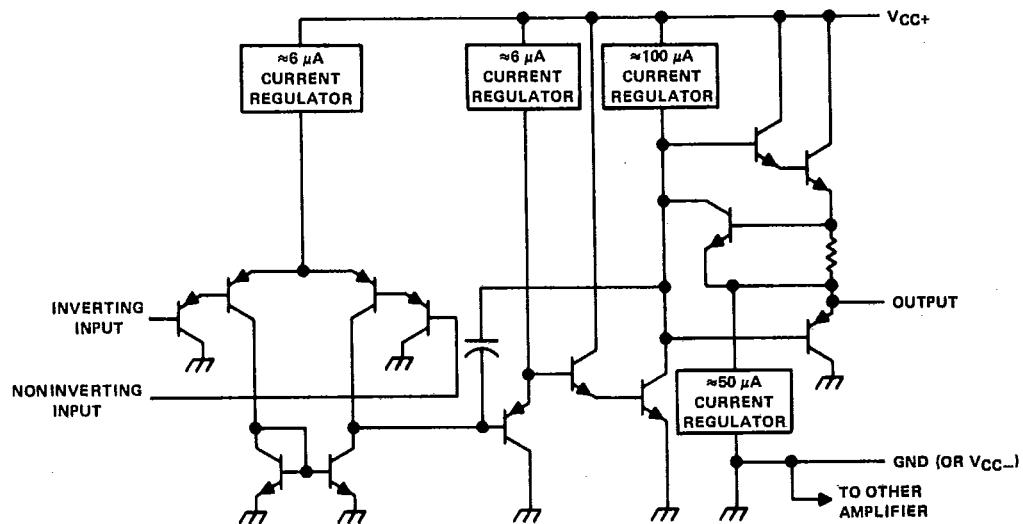
T-79-05-20

AVAILABLE OPTIONS

TA	V _{IO} MAX AT 25°C	PACKAGE				
		SMALL OUTLINE (D)	CHIP CARRIER (FK)	CERAMIC DIP (JG)	PLASTIC DIP (P)	FLAT PACK (U)
0°C to 70°C	7 mV	LM358D	—	LM358JG	LM358P	—
—25°C to 65°C	3 mV	LM358AD	—	LM358AJG	LM358AP	—
—40°C to 105°C	5 mV	LM258D	—	LM258JG	LM258P	—
—55°C to 125°C	7 mV	LM258AD	—	LM258AJG	LM258AP	—
—40°C to 105°C	3 mV	LM2904D	—	LM2904JG	LM2904P	—
—55°C to 125°C	5 mV	—	LM158FK	LM158JG	—	LM158U

The D package is available tape and reeled. Add the suffix R to the device type. (e.g., LM358DR)

schematic (each amplifier)



TEXAS INSTR (LIN/INTFC) 18E D ■ 8961724 0077416 0 ■

LM158, LM258, LM358, LM258A, LM358A, LM2904
DUAL OPERATIONAL AMPLIFIERS

T-79-05-20

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

	LM158, LM258, LM258A LM358, LM358A	LM2904	UNIT
Supply voltage, V_{CC} (see Note 1)	32	26	V
Differential voltage (see Note 2)	± 32	± 26	V
Input voltage range (either input)	0.3 to 32	0.3 to 26	V
Duration of output short-circuit (one amplifier) to ground at (or below) 25°C free-air temperature ($V_{CC} \leq 15$ V) (see Note 3)	unlimited	unlimited	
Continuous total dissipation	See Dissipation Rating Table		
Operating free-air temperature range	LM158	-55 to 125	
	LM258, LM258A	-25 to 85	
	LM358, LM358A	0 to 70	
	LM2904	-40 to 105	°C
Storage temperature range	-65 to 150	-65 to 150	°C
Case temperature for 60 seconds	FK package	260	°C
Lead temperature 1.6 mm (1/16 inch) from case for 60 seconds	JG, or U package	300	°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds	D or P package	260	°C

NOTES: 1. All voltage values, except differential voltages, and V_{CC} specified for measurement of I_{OS} , are with respect to the network ground terminal.

2. Differential voltages are at the noninverting input terminal with respect to the inverting input terminal.
3. Short circuits from outputs to V_{CC} can cause excessive heating and eventual destruction.

DISSIPATION RATING TABLE

PACKAGE	TA ≤ 25°C POWER RATING	DERATING FACTOR ABOVE TA = 25°C	TA = 70°C POWER RATING	TA = 85°C POWER RATING	TA = 125°C POWER RATING
D	725 mW	5.8 mW/°C	464 mW	377 mW	—
FK	1375 mW	11.0 mW/°C	880 mW	715 mW	275 mW
JG (LM158)	1050 mW	8.4 mW/°C	672 mW	546 mW	210 mW
JG (all others)	825 mW	6.6 mW/°C	528 mW	429 mW	—
P	1000 mW	8.0 mW/°C	640 mW	520 mW	—
U	675 mW	5.4 mW/°C	432 mW	351 mW	135 mW

2

Operational Amplifiers

T-79-05-20

2 Operational Amplifiers

electrical characteristics at specified free-air temperature, $V_{CC} = 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS [†]	LM158, LM258			LM358			LM2904			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{CC} = 5$ V to MAX, $V_{ICR} = V_{ICR}$ min, $V_O = 1.4$ V	25°C Full range	3	5	3	7	3	7	3	7	mV
α_{VIO} Average temperature coefficient of input offset voltage		Full range 25°C	7		7		7		7		μ V/ $^{\circ}$ C
I_{IO} Input offset current	$V_O = 1.4$ V	Full range 25°C	2	30	2	50	2	50	2	50	nA
α_{IIO} Average temperature coefficient of input offset current		Full range 25°C	10		10		10		10		pA/ $^{\circ}$ C
I_{IB} Input bias current	$V_O = 1.4$ V	Full range 25°C	-20	-150	-20	-250	-20	-250	-20	-250	nA
V_{ICR} Common-mode input voltage range	$V_{CC} = 5$ V to MAX	Full range 25°C	-300		-300		-500		-500		
V_{OH} High-level output voltage		0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	0 to $V_{CC} - 1.5$	V
V_{OL} Low-level output voltage		$R_L \geq 2$ k Ω $R_L \geq 10$ k Ω	$V_{CC} - 1.5$ $V_{CC} - 1.5$	V							

AvD	Large-signal differential voltage amplification	V _{CC} = 15 V, V _O = 1 V to 11 V, R _L = ≥ 2 k Ω	25°C Full range	50 25	100 65	25 65	100 80	25 50	100 80	15 50	V/mV
CMRR	Common-mode rejection ratio	V _{CC} = 5 V to MAX, V _{IC} = V _{ICR} min	25°C	70 65	80 80	70 65	80 80	50 50	80 80	15 15	dB
kSV/R	Supply voltage rejection ratio (ΔV _{CC} /ΔV _O)	V _{CC} = 5 V to MAX f = 1 kHz to 20 kHz	25°C 25°C	65 20	100 30	65 120	100 120	50 120	100 120	100 120	dB
V _{O1} /V _{O2}	Crosstalk attenuation	V _{CC} = 15 V, V _{ID} = 1 V, V _O = 0	25°C Full range	120 -10	-30 -10	120 -20	-30 -30	120 -20	-30 -30	120 -10	dB
I _O	Output current	V _{CC} = 15 V, V _{ID} = -1 V, V _O = 5 V	25°C Full range	10 5	20 5	10 5	20 5	10 5	20 5	10 5	mA
I _{OS}	Short-circuit output current	V _{CC} at 5 V, GND at -5 V, V _O = 0	25°C	12 ±40	30 ±60	12 ±40	30 ±60	30 ±40	30 ±40	30 ±40	μA
I _{CC}	Supply current (two amplifiers)	V _O = 2.5 V, No load	Full range	0.7 1	1.2 2	0.7 1	1.2 1	0.7 1	1.2 1	0.7 1	mA

[†]All characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. "MAX" V_{CC} for testing purposes is 26 V for LM2904, 36 V for the others. Full range is -55°C to 125°C for LM158, -25°C to 85°C for LM258, 0°C to 70°C for LM358, and -40°C to 105°C for LM2904.

Operational Amplifiers



TEXAS
INSTRUMENTS

POST OFFICE BOX 655012 • DALLAS, TEXAS 75265

2
Operational Amplifierselectrical characteristics at specified free-air temperature, $V_{CC} = 5$ V (unless otherwise noted)

PARAMETER	TEST CONDITIONS ¹	LM258A			LM358A			UNIT
		MIN	TYP	MAX	MIN	TYP	MAX	
V_{IO} Input offset voltage	$V_{CC} = 5$ V to 30 V V_{ICR} min, $V_O = 1.4$ V	25°C Full range	2	3	2	3	2	mV
Average temperature coefficient of input offset voltage		Full range	7	15	7	20	20	$\mu\text{V}/^\circ\text{C}$
α_{VIO} Input offset current		25°C Full range	2	15	2	30	nA	
I_{IO} Average temperature coefficient of input offset current	$V_O = 1.4$ V	Full range	30	75	30	75	pA/ $^\circ\text{C}$	
α_{IIO} Input bias current		Full range	10	200	10	300		
I_B Input bias current	$V_O = 1.4$ V	25°C Full range	-15	-80	-15	-100	-100	nA
V_{ICR} Common-mode input voltage range	$V_{CC} = 30$ V	0 to Full range	0 to $V_{CC} - 1.5$	-100	0 to $V_{CC} - 1.5$	-200	-200	
V_{OH} High-level output voltage		$R_L \geq 2$ k Ω $V_{CC} = 30$ V, $R_L = 2$ k Ω	25°C Full range	26	26	26	26	V
V_{OL} Low-level output voltage		$V_{CC} = 30$ V, $R_L \geq 10$ k Ω $R_L \leq 10$ k Ω	Full range	27	28	27	28	mV

T-79-05-20

AVD	Large-signal differential voltage amplification	V _{CC} = 15 V, V _O = 1 V to 11 V, R _L ≥ 2 kΩ	25°C	50	100	25	100				V/mV
CMRR	Common-mode rejection ratio		Full range	25		15					
kSVR	Supply voltage rejection ratio		25°C	70	80	65	80				dB
V ₁₁ /V _{O2}	Crosstalk attenuation	f = 1 kHz to 20 kHz	25°C	65	100	65	100				dB
I _O	Output current	V _{CC} = 15 V, V _{ID} = 1 V, V _O = 0	25°C	20	30	60	20	30	60		mA
		V _{CC} = 15 V, V _{ID} = -1 V, V _O = 15 V	Full range	10		10		10			
I _{OS}	Short-circuit output current	V _{CC} at 5 V, GND at -5 V, V _O = 0	25°C	10	20	10	20				
I _{IC}	Supply current (two amplifiers)	V _{CC} = 2.5 V, No load	Full range	5		5					
		V _{CC} = 30 V, V _O = 15 V, No load	Full range	1	2	1	2	2			

^TAll characteristics are measured under open-loop conditions with zero common-mode input voltage unless otherwise specified. Full range is -25°C to 85°C for LM258A and 0°C to 70°C to LM358A.

Operational Amplifiers

2