

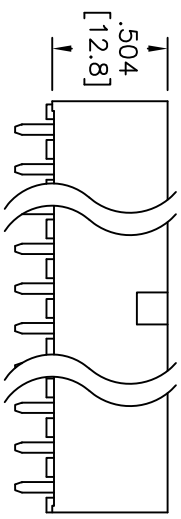
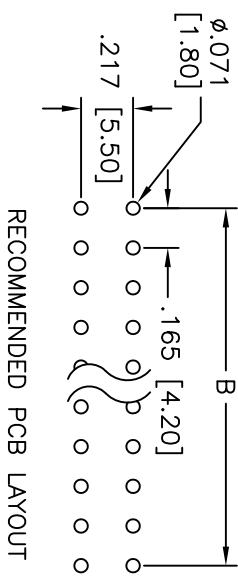


Rev	AWO #	Description	Date	Appr
-	7747	RELEASED	5/8/07	

APPROVED: _____
 DATE: _____ TITLE: _____

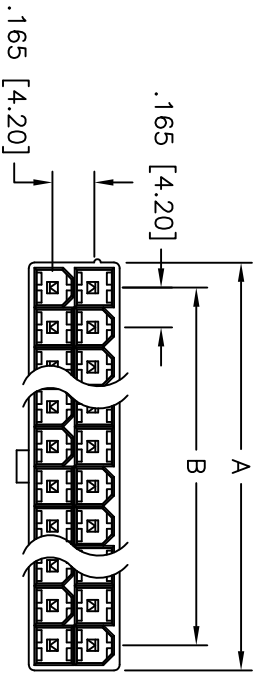

A = .165 [4.20] x No. of Spaces + .213 [5.40]
 B = .165 [4.20] x No. of Spaces

SPECIFICATIONS:

Material: Insulator: Nylon 6T, rated UL 94V-2
 Insulator color: Natural
 Contacts: Brass
 Plating: Matt Tin over Nickel underplate overall

Electrical: Operating voltage: 250 VAC max
 Current rating: 5 Ammps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +125°C

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 260°C. for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIGHT HOUSING, MALE TERMINAL
 PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		DRAWN		DATE	
.X ± .10	ØX ± .10	BW	5/8/07		
.XX ± .020	ØXX ± .015	CHECKED			
.XXX ± .015	ØXXX ± .010	APPROVED			
APPROVALS		SIZE	PART NO.	SCALE	SHEET 1 OF 2
		X	DMF-XX-S-MT-HT	NTS	
		REF:			REV. -

6

5

4

3

2


1

Rev	AWO #	Description	Date	Appr
		SEE SHT 1 OF 2 FOR REVISION		


APPROVED: _____

DATE: _____ TITLE: _____


2 POSITION




8 POSITION




14 POSITION




20 POSITION




4 POSITION




10 POSITION




16 POSITION




22 POSITION




6 POSITION




12 POSITION



18 POSITION



24 POSITION



A

B

C

D

A

B

C

D

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STRAIGHT HOUSING, MALE TERMINAL
PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	BW
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DMF-XX-S-MT-HT	-
REF:	SCALE: NTS	SHEET 2 OF 2

6

5

4

3

2

1