

Ordering Information :

D* - $\frac{**}{1}$ SQ $\frac{*}{2}$ N L 2

* * * DSQ Series * * *

* Insulator : UL 94V-0 PBT.

* Contact : Brass


1. No. of circuits

2. Plating :

U=Gold flash over 30~50?" nickel overall

W=15?" gold over 30~50?" nickel overall

Z=30?" gold over 30~50?" nickel overall

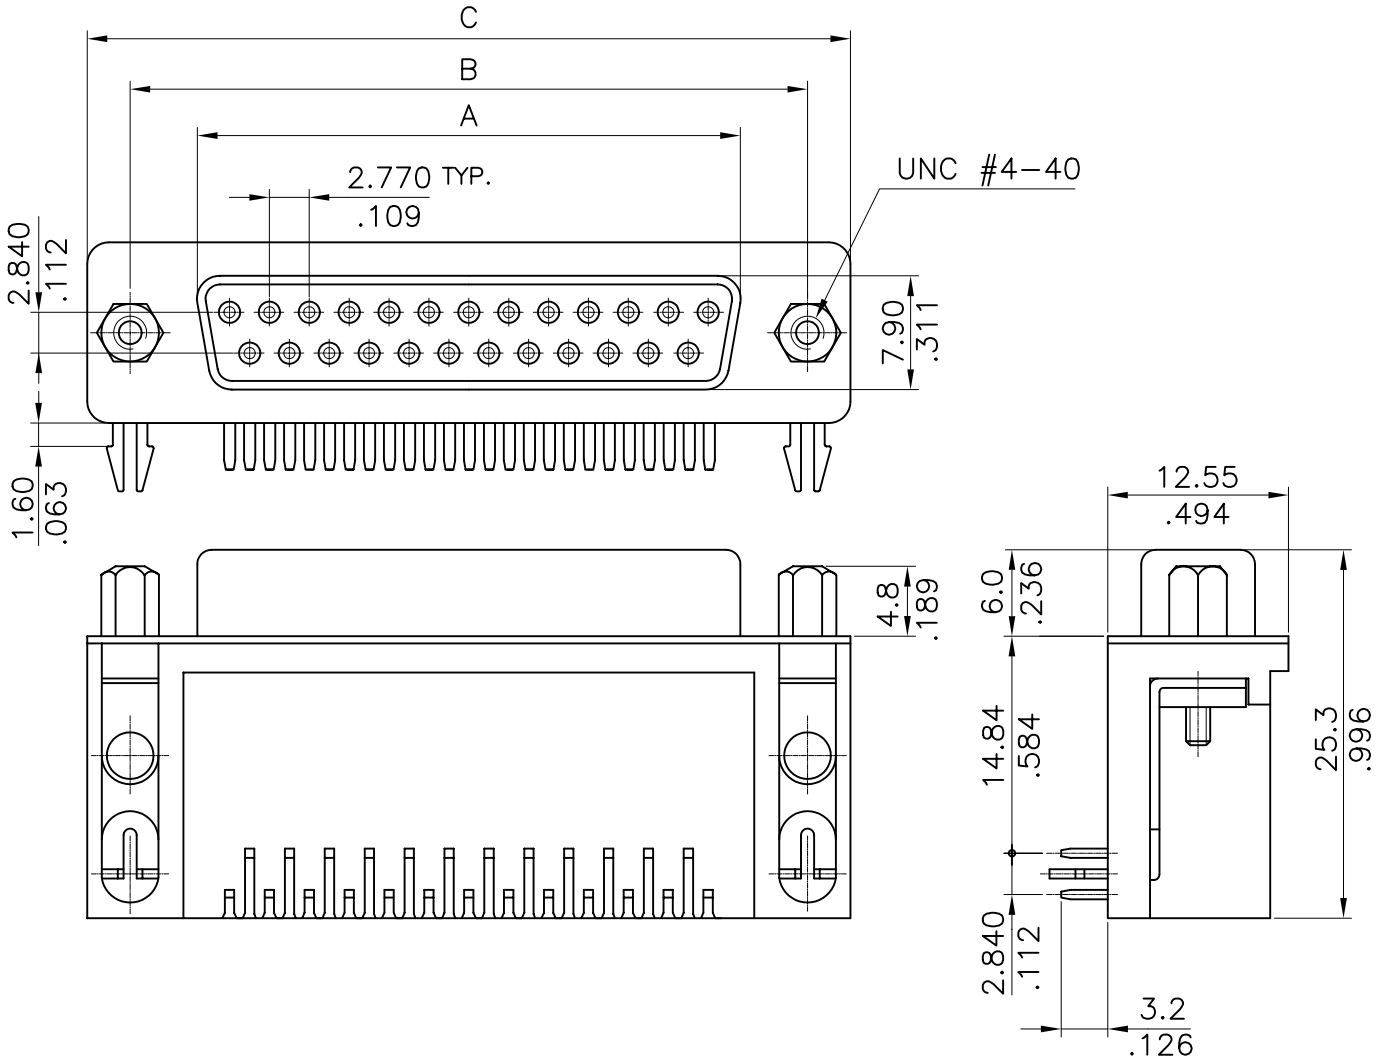

Circuits	Dim.A	Dim.B	Dim.C
9	16.33(.643)	24.990(0.984)	30.8(1.213)
15	24.66(.971)	33.320(1.312)	39.1(1.539)
25	38.38(1.511)	47.040(1.852)	53.0(2.087)
37	54.84(2.159)	63.500(2.500)	69.3(2.728)

leoco LECO CORPORATION

GENERAL TOLERANCE

X. ± X. ± 2°

.X ± $\frac{0.30}{.012}$.X' ±

.XX ± $\frac{0.20}{.008}$.XX' ±

.XXX ± $\frac{0.10}{.004}$.XXX' ±

APPROVED BY:

PART NO.:

D* - **SQ*NL2


CHECKED BY:

TITLE: 14.84mm(.584")
Pitch Foot Print
Socket Connector

DRAW BY:

DRAWING NO.:

DSQ006S



UNITS
mm
inch

SCALE	SIZE	SHEET	REV.
1.8:1	A4	1/1	C

REV.	ECO. NO.	CHG	APPD.
C	E960792		
B	E960249		
A	DWG REL.		