


THIS SKETCH IS FOR QUOTATION PURPOSES ONLY

**FINISH**  
(TICK APPLICABLE):

100% TIN

GOLD

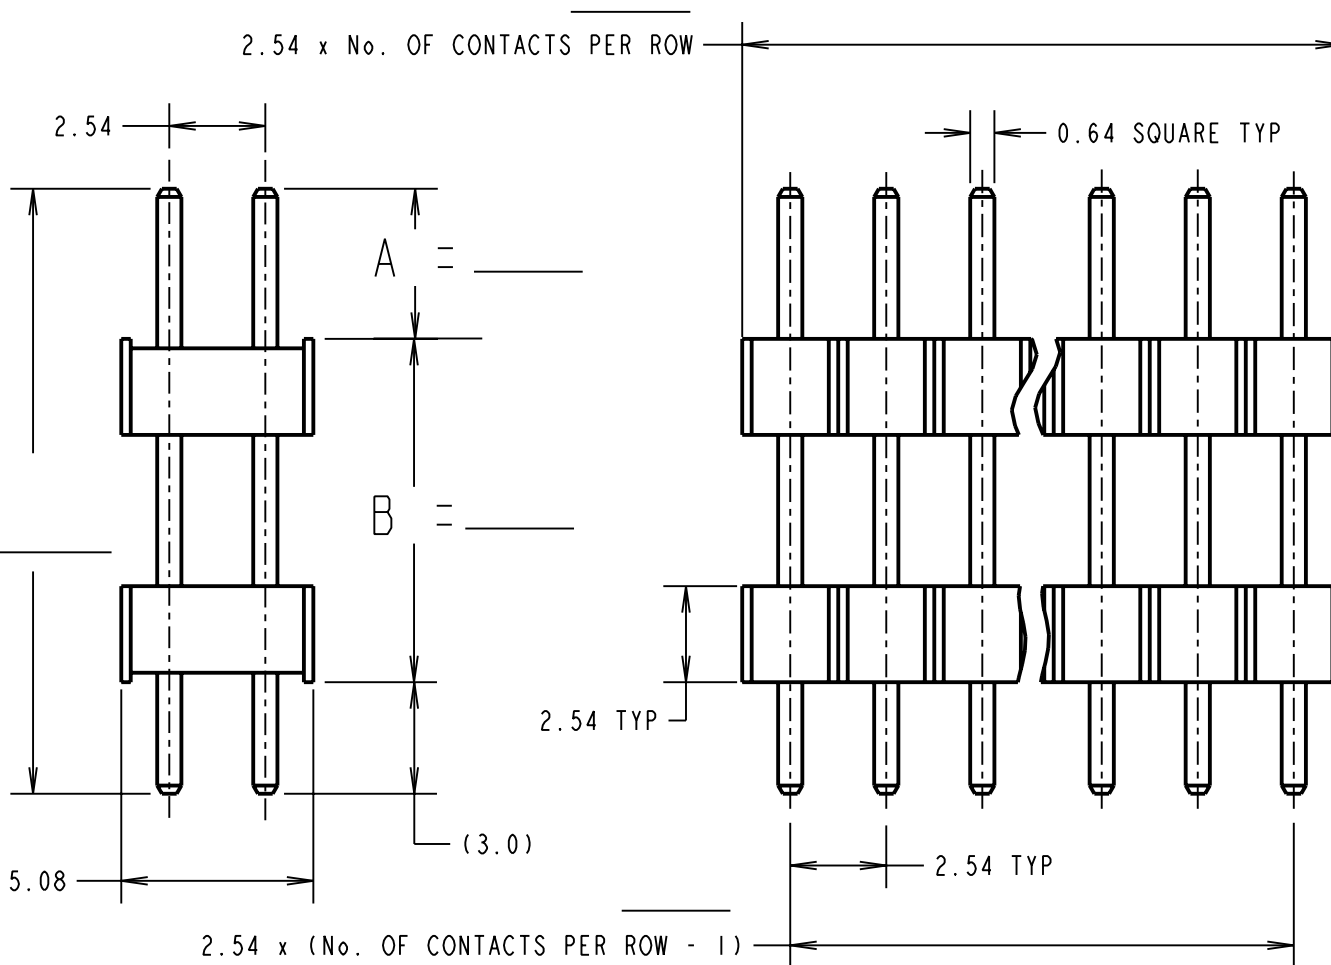

- NOTES:
1. MAXIMUM PERMISSIBLE OUT OF SQUARE OF PIN TO MOULDING TO BE 0.10mm IN ANY DIRECTION.
  2. CONTACT LEG VARIATION ON COMPLETE ASSEMBLY NOT TO EXCEED 0.10mm.

SPECIFICATION:

MATERIAL:  
MOULDING = HIGH TEMPERATURE NYLON 6T, UL94V-0, BLACK

PINS = BRASS

FINISH:  
PINS: SEE BOX ABOVE

ELECTRICAL:  
CURRENT RATING = 3A MAX  
CONTACT RESISTANCE = 30 mΩ MAX  
INSULATION RESISTANCE = 10,000 MΩ MIN  
DIELECTRIC STRENGTH = 750V AC/DC

ENVIRONMENTAL:  
TEMPERATURE RANGE = -40°C TO +105°C

PACKING:  
BAG

DATE OF SKETCH:

REQUESTED BY:

No. OF CONTACTS PER ROW:

**HARWIN**

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm  
X.X = ±0.25mm  
X.XX = ±0.10mm  
X.XXX = ±0.01mm

ANGLES = ±5°  
UNLESS STATED

TITLE:

2.54mm PITCH DIL EXTENDED PC TAIL PIN HEADER VARIANT

DRAWING No.:

M20 - \_\_\_\_\_ F \_\_\_\_\_

SHT 1 OF 1

HARWIN INC U.S.A. TEL: (812) 542 2540 FAX: (812) 542 2541	HARWIN PLC U.K. TEL: 023 9231 4545 FAX: 023 9231 4590	HARWIN PTE SINGAPORE TEL: 65 6779 4909 FAX: 65 6779 3868
--	--	---