



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

SM5817PL THRU SM5819PL

Schottky Barrier Diodes 20 to 40 Volts

Features

- High Surge Capability
- Low Forward Voltage
- Low Profile Package


Mechanical Data

- Packaging: Powerlite-123
- Marking Code: SM5817PL---K2; SM5818PL---K3 ; SM5819PL---K4
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0

Maximum Ratings


Symbol	Rating	Rating	Unit
V_{RMS}	Maximum RMS Voltage	SM5817PL	14
		SM5818PL	21
		SM5819PL	28
V_{RRM}	Repetitive Reverse Voltage	SM5817PL	20
		SM5818PL	30
		SM5819PL	40
$I_{F(AV)}$	Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_L=90^\circ C$	1.0	A
I_{FSM}	Surge Forward Current at $T_L=70^\circ C, 8.3ms$	30	A
$R_{\theta JL}$	Typical Thermal Resistance ⁽¹⁾	80	$^\circ C / W$
T_J	Junction Temperature	-65 to +125	$^\circ C$
T_{STG}	Storage Temperature	-65 to +125	$^\circ C$

Powerlite-123

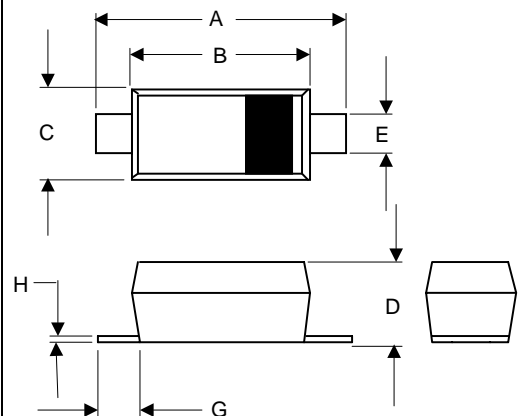

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.112	2.55	2.85	
C	.055	.071	1.40	1.80	
D	.037	.053	0.95	1.35	
E	.020	.039	0.50	1.00	
G	.010	-----	0.25	-----	
H	-----	.008	----	.20	

SUGGESTED SOLDER PAD LAYOUT

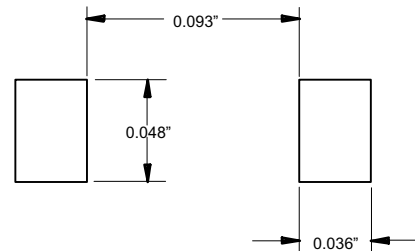

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units	
V_F	Forward Voltage (@1A dc)	SM5817PL	---	0.45	---	
		SM5818PL	---	0.56	---	
		SM5819PL	---	0.60	---	
I_R	Leakage Current		---	0.1	mA	
						@ $T_A=25^\circ C$
						@ $T_A=100^\circ C$
C_j	Typical Junction Capacitance @ $f=1.0MHz, V_r=4V$	---	110	---	pF	

Tnote: Thermal Resistance: PC Board Mounted on 0.2*0.2"(5*5mm) copper pad area.

Fig. 1-TYPICAL FORWARD CURRENT

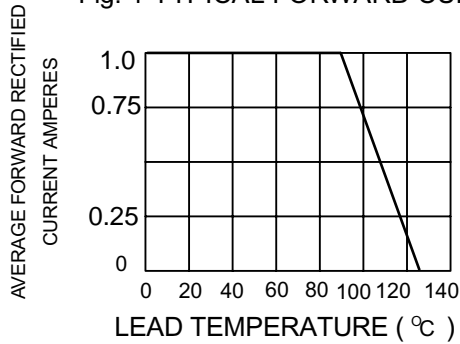


Fig. 2-TYPICAL FORWARD CHARACTERISTICS

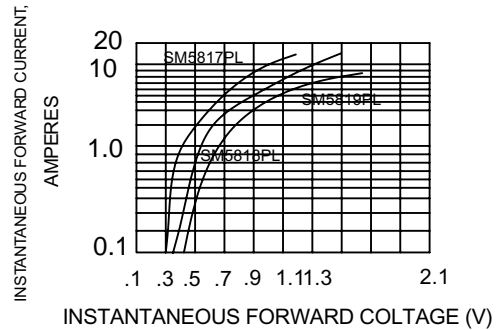


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

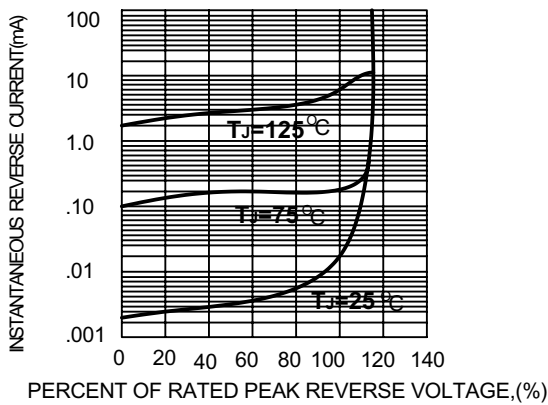


Fig. 4-FORWARD SURGE CURRENT


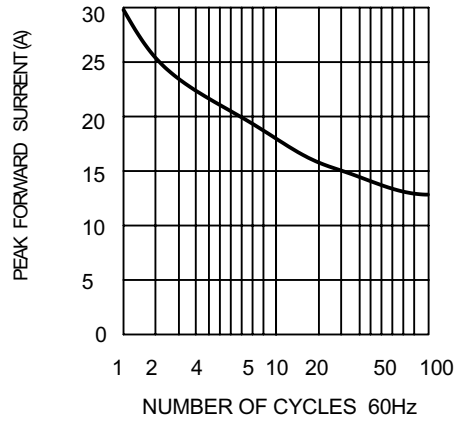


Fig. 5-TYPICAL JUNCTION CAPACITANCE



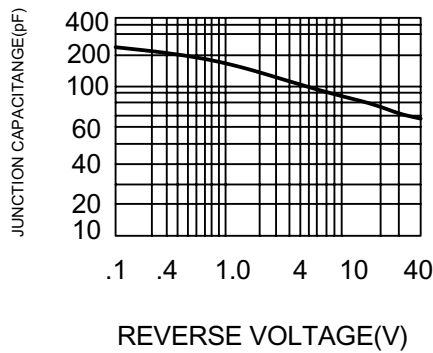

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.