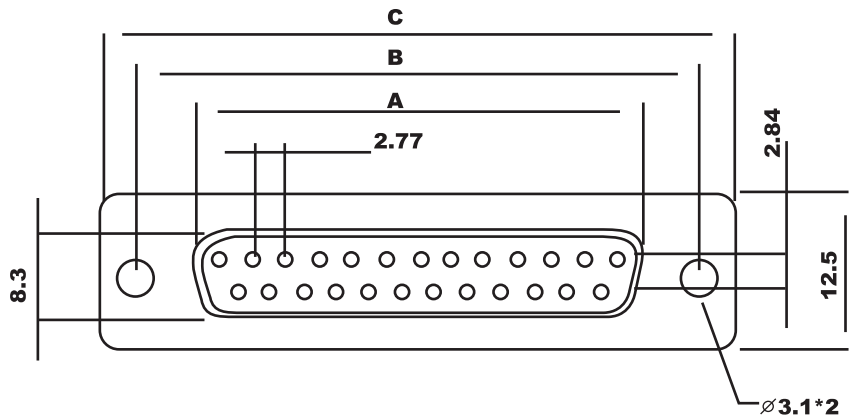

Position	A	B	C	D
9M	16.92	25.00	30.8	19.2
15M	25.25	33.30	39.2	27.7
25M	38.96	47.10	53.1	41.1
37M	55.42	63.50	69.4	57.3

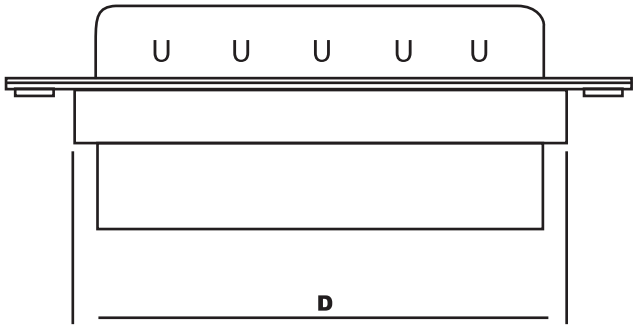

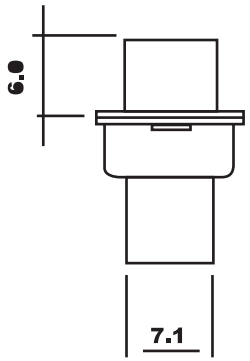

Material:
- Insulator Material: PBT, UL94V-0
- Shell: Steel
- Operation Temperature: -55°C to +105°C

Electrical:
- Current Rating: 3.0A

RoHS Complaint

Scale	1:1						Name
TOLERANCE							
X.X	±0.40			Drawn	11.22.11		Chappell
X.XX	±0.25			Approved			
X.XXX	±0.15						
Angle	±3°						
			Modification	Date	Name		

ASSMANN WSW components

Item No.
A-DSCR-xx-FZ-R

Title
D-Sub Crimp Housing, Male

Drawing No.

rev00

Replace

Sheet