








Female Header 2.0mm 1 Row H=4.3mm Bottom Close Straight Type

Specifications

Current Rate: 2.0 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material






Insulator: Polyester, UL 94V-0
 ©Standard: Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

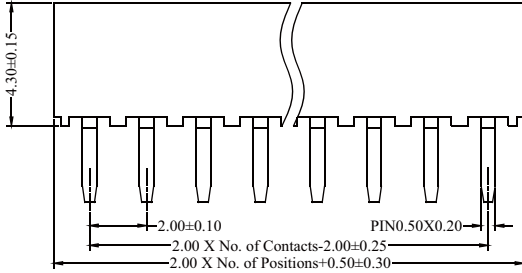

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

Part No.: PS2S43C-1XX-U


Female Header 2.0mm 2 Row H=4.3mm Bottom Close Straight Type

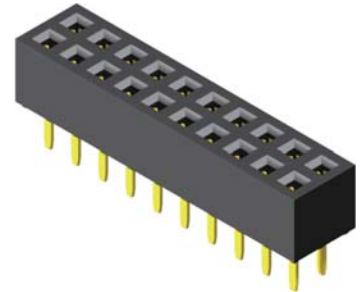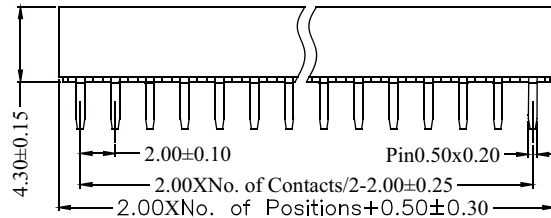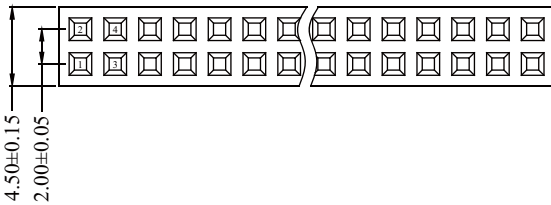

Recommended P.C.B Layout (TOP Side)
 (PCB BOARD TOLERANCE ±0.05)

Part No.: PS2S43C-2XX-U

ORDER INFORMATION

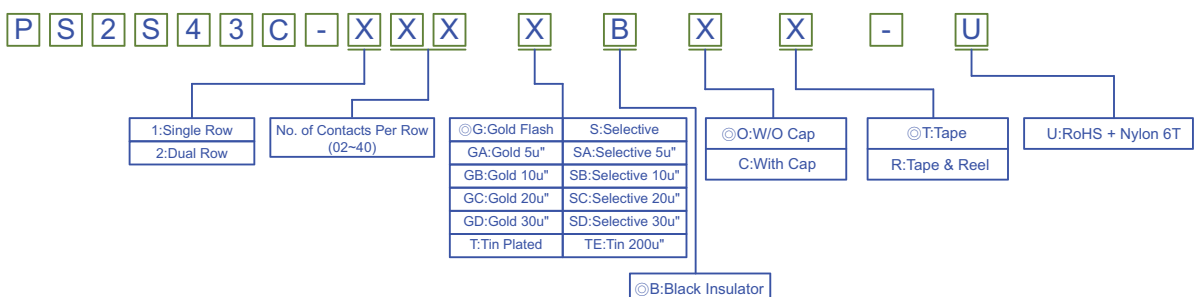

©Standard Recommended

