






.100/.156 CENTER SOCKETS

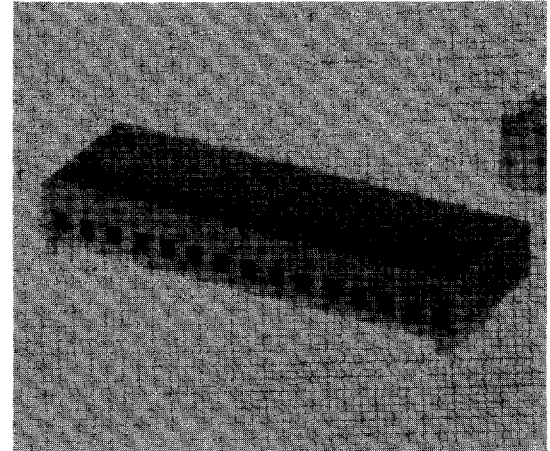

ORDERING INFORMATION



1. **DESCRIPTION**
CS = Center Socket
2. **SPACING**
100 = .100" centers
156 = .156" centers
3. **POSITION**
2 through 20 (.100")
2 through 15 (.156")
4. **LOCKING OPTIONS**
LR = With locking ramp
NL = No locking Ramp



1. **DESCRIPTION**
CS2822 = Crimp terminal for CS100 (#28-22 AWG)
CS2618 = Crimp terminal for CS156 (#26-18 AWG)
2. **PACKAGING**
B = Bag of 1000 pieces
R = Reel of 10,000 (CS2822)
Reel of 7,000 (CS2618)

FEATURES: .100 CENTER SOCKET

- Available in 2 through 20 circuits
- Standard with polarization and locking ramp
- UL94V-0 Nylon 6/6, Natural color
- Available with or without locking ramp

FEATURES: .156 CENTER SOCKET

- Mates with .45" sq. or round posts
- Available from 2 through 15 circuits
- UL 94V-0 material
- Mates with Contact CLH & CH series

CS SERIES SPECIFICATIONS:

- Standard with polarization and locking ramp
- UL 94V-0 Nylon 6/6, Natural color
- Available with or without locking ramp

DIMENSIONAL DATA

All dimensions in (inches) and millimeters.

CONTACTS	CS100		CS156	
	A	B	A	B
2	2.54 (.100)	5.73 (.226)	3.96 (.156)	7.82 (.308)
3	5.08 (.200)	8.27 (.326)	7.92 (3.12)	11.78 (.468)
4	7.62 (.300)	10.81 (.426)	11.88 (.468)	15.74 (.620)
5	10.16 (.400)	13.35 (.526)	15.84 (.624)	19.70 (.932)
6	12.70 (.500)	15.89 (.626)	19.80 (.780)	23.66 (1.087)
7	15.24 (.600)	18.43 (.726)	23.76 (.935)	27.62 (1.087)
8	17.78 (.700)	20.97 (.826)	27.72 (1.091)	31.58 (1.243)
9	20.32 (.800)	23.51 (.926)	31.68 (1.247)	35.54 (1.339)
10	22.86 (.900)	26.05 (1.026)	35.64 (1.403)	39.50 (1.555)
11	25.40 (1.000)	28.59 (1.126)	39.60 (1.559)	43.46 (1.711)
12	27.94 (1.100)	31.13 (1.226)	43.56 (1.715)	47.42 (1.867)
13	30.48 (1.200)	33.67 (1.326)	47.55 (1.872)	51.38 (2.023)
14	33.02 (1.300)	36.21 (1.426)	51.51 (2.028)	55.34 (2.179)
15	35.56 (1.400)	38.75 (1.526)	55.47 (2.184)	59.30 (2.335)
16	38.10 (1.500)	41.30 (1.626)		
17	40.64 (1.600)	43.84 (1.726)		
18	43.18 (1.700)	46.38 (1.826)		
19	45.72 (1.800)	48.92 (1.926)		
20	48.26 (1.900)	51.46 (2.026)		

*Millimeters (inches)

